


PAGE 1/1	ISSUE 25/04/19	SERIES TestPro	PART NUMBER TP4.2S-SMAM-NM-XX
----------	-----------------------	-----------------------	--------------------------------------

CUSTOMER : All SPECIFICATION : - ISSUE : - DATE -

All dimensions are in mm

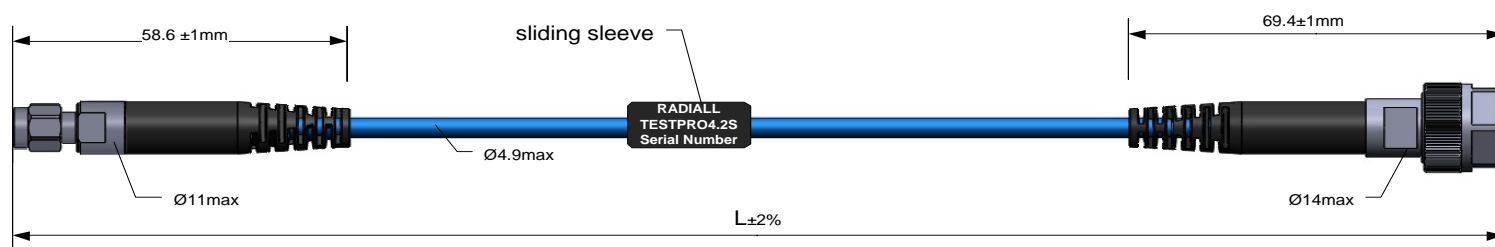

Part Number	Overall Length (mm)	Tolerance (mm)
TP4.2S-SMAM-NM-24	610	±12
TP4.2S-SMAM-NM-36	914	±18
TP4.2S-SMAM-NM-48	1220	±24
TP4.2S-SMAM-NM-78	2000	±40

CONNECTORS DESIGNATION

Connector 1: **R125064151**
SMA straight plug
Stainless steel passivated
 Torque wrench : **110** N.cm

Connector 2: **R163064151**
N straight plug
Stainless steel passivated
 Torque wrench : **170** N.cm

CABLE DESIGNATION

TestPro4.2S

PROTECTIVE JACKET

-

OUTER DIAMETER

4,90 mm max

MARKING

White marking on a black sliding heatshrink sleeve

ELECTRICAL CHARACTERISTICS

Characteristic impedance **50 ±2** Ohms

Frequency band : **DC-18** GHz

Part Number	Length (mm)	Max insertion loss (dB) at 20°C	Max VSWR at 20°C
TP4.2S-SMAM-Nm-24	610	1,92	1,30 : 1
TP4.2S-SMAM-Nm-36	914	2,72	1,30 : 1
TP4.2S-SMAM-Nm-48	1220	3,52	1,30 : 1
TP4.2S-SMAM-Nm-78	2000	5,57	1,30 : 1

Phase stability with bending (*) **<3,06 °** at 18GHz
Stabilité de phase en enroulement

Attenuation stability with bending (*) **<0.05 dB** at 18GHz
Stabilité de pertes en enroulement

(*) Test done according to IEC60966-1. Cable is submitted to 5 windings 360° clockwise on a 100mm mandrel. Measurement is done after 5 windings.

MECHANICAL CHARACTERISTICS

Static bending radius : **25** mm

Dynamic bending radius : **50** mm

Life (Connectors) : **5 000** Cycles

ENVIRONMENTAL CHARACTERISTICS

Temperature range : **-55°C to +105°C**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)