

## RAFIX 16 F - Selector switch, collar metallized, round


## 1.30.093.621/2000





General information	
Actuator	handle
Color of handle marking	translucent white
Form of collar	round
Color of collar	silver metallic
Dimensions	
Collar dimensions	ø 28 mm
Overall height	12.1 mm
Mounting depth with contact block	50 mm
Key grid	30 x 30 mm
Mounting hole	ø 22.3 mm
Mountaing Hole	<u>9 22.0 mm</u>
Mechanical design	
Mounting	ring nut
Contact function	latching
Illumination	yes
Rotating angle	1 x 90°, form V
Mechanical characteristics	
Torque max.	1.3 Nm
Torque max.	1.5 (4)11
Electrical characteristics	
Protection class	-
Other specifications	00.000
Operating life (operations)	30.000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Operation temperature min.	-25 °C
Ambient temp. operating max. without lamp / LED	+70 °C
Ambient temp. operating max. with lamp /LED	+55 °C
Storage temperature min.	-40 °C
Storage temperature max.	+85 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



## Panel cut-out to IEC 60947-5-1

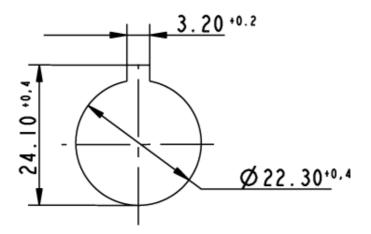





## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Actuators category:

Click to view products by Rafi manufacturer:

Other Similar products are found below:

LW1B-A0L LW1B-M0 680-4000-00 704.012.618 704.096.0 704.411.018I 704.412.0 704.633.1 704.730.1 704.733.0 862.8102 G6083

9PA24 A0107X A019307 ADC-418G 12MA7 ASDHHY-B HW1F-3G HW1M-L2222 HW4S-31L 200-.704-00 JS-10008 JS-10083 JS
10118 JS-10133 JS-10277 JS-10389 JS-150 JS-552 JS-555 JS-68 JS-6-B JS-91 JS-94 22-211.011 9001KXSDC 92-458.500 SAPT654133

2PA3 SW53AA2 302561 LW2L-A0 3E-10.4 468-10243-001 51-030.005 JM-13 JS-10120 JS-138-B JS-143-B