RAFIX 16 F - Selector switch, non-illuminated, latching

1.30.093.700/0200

General information

Actuator	handle
Color of handle marking	opaque white
Form of collar	square
Color of collar	black

Dimensions

Collar dimensions	24.9 x 24.9 mm
Overall height	12.1 mm
Mounting depth with contact block	50 mm
Key grid	30 x 30 mm
Mounting hole	23.1 x 23.1 mm

Mechanical design

Mounting	ring nut
Contact function	latching
Illumination	no
Rotating angle	2 x 60°

Mechanical characteristics

Torque max.	1.3 Nm

Electrical characteristics

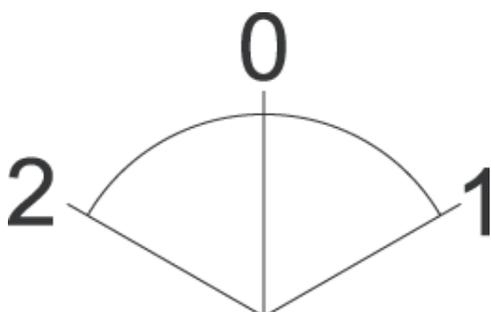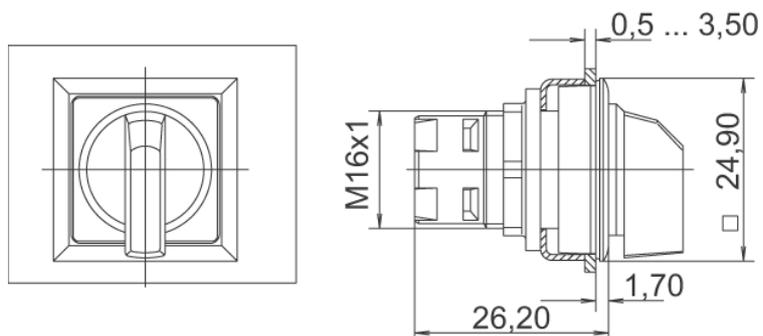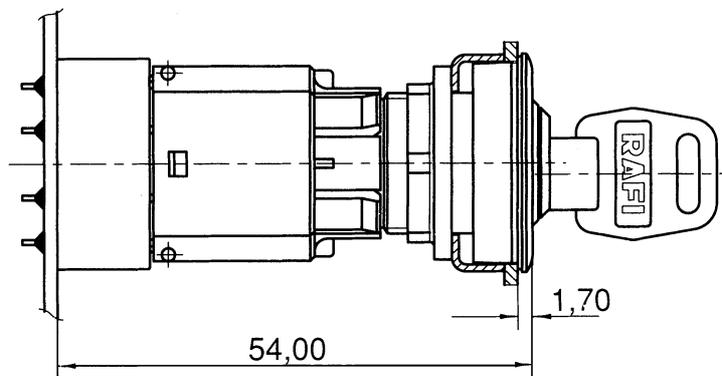|	
Protection class	-

Other specifications

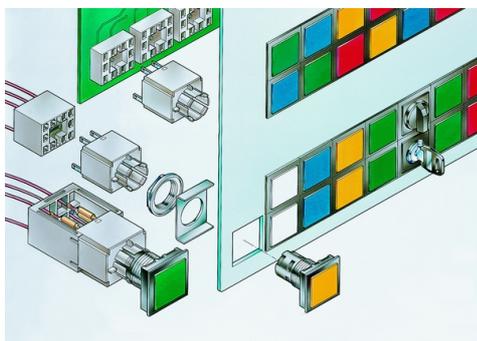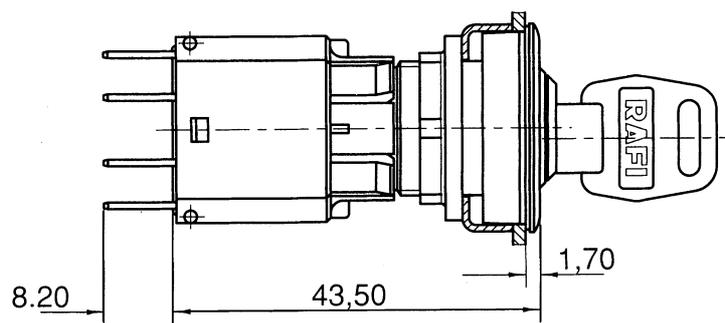|	
Operating life (operations)	30.000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Operation temperature min.	-25 °C
Ambient temp. operating max. without lamp / LED	+70 °C
Ambient temp. operating max. with lamp /LED	+55 °C
Storage temperature min.	-40 °C
Storage temperature max.	+85 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes

Panel cut-out

□23,10 +0,15

with PCB plug-in socket

1,70

54,00

0,5 ... 3,50

M16x1

24,90

□

1,70

26,20

0

2   1

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.
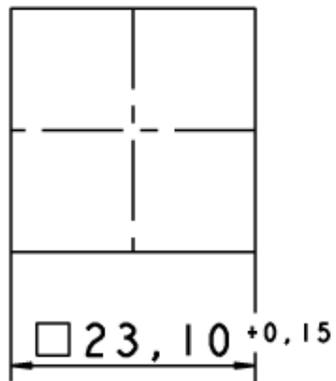
operating element and contact block

1,70

8.20

43,50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Actuators *category:*

Click to view products by Rafi *manufacturer:*

Other Similar products are found below :

LW1B-A0L LW1B-M0 680-4000-00 704.012.618 704.096.0 704.411.018I 704.412.0 704.633.1 704.730.1 704.733.0 862.8102 G6083 9PA24 A0107X A019307 ADC-418G 12MA7 ASDHHY-B HW1F-3G HW1M-L2222 HW4S-31L 200-.704-00 JS-10008 JS-10083 JS-10118 JS-10133 JS-10277 JS-10389 JS-150 JS-552 JS-555 JS-68 JS-6-B JS-91 JS-94 22-211.011 9001KXSDC 92-458.500 SAPT654133 2PA3 SW53AA2 302561 LW2L-A0 3E-10.4 468-10243-001 51-030.005 JM-13 JS-10120 JS-138-B JS-143-B