

RAFIX 22 QR - Pushbutton, non-illuminated, flush lens, square collar, metal front ring, latching







General information	
Form of lens	flat lens
Color of lens	opaque blue
Color of front ring	silver metallic
Form of collar	square
Dimensions	
Dimensions of collar	29.8 x 29.8 mm
Overall height	9.4 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Machanical decian	
Mechanical design	ain a na st
Mounting	ring nut
Contact function	latching
Illumination	no
Mechanical characteristics	
Operating travel	4 mm
Operating force max.	approx. 5 N for 1 switching element
Robustness max.	100 N
Others are all and are	
Other specifications	4 000 000
Operating life (operations)	1,000,000 momentary / 500,000 latching cycle
Degree of protection from front side	<u>IP65 (DIN EN 60529)</u>
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



Panel cut-out to IEC 60947-5-1

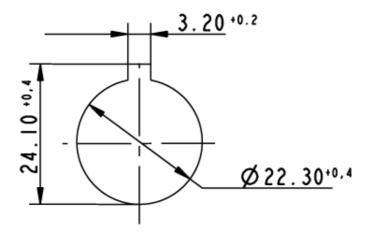



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Actuators category:

Click to view products by Rafi manufacturer:

Other Similar products are found below:

LW1B-A0L LW1B-M0 680-4000-00 704.012.618 704.096.0 704.411.018I 704.412.0 704.633.1 704.730.1 704.733.0 862.8102 G6083

9PA24 A0107X A019307 ADC-418G 12MA7 ASDHHY-B HW1F-3G HW1M-L2222 HW4S-31L 200-.704-00 JS-10008 JS-10083 JS
10118 JS-10133 JS-10277 JS-10389 JS-150 JS-552 JS-555 JS-68 JS-6-B JS-91 JS-94 22-211.011 9001KXSDC 92-458.500 SAPT654133

2PA3 SW53AA2 302561 LW2L-A0 3E-10.4 468-10243-001 51-030.005 JM-13 JS-10120 JS-138-B JS-143-B