


# AN6520

## Multilayer Chip Antenna for 2.4GHz Wireless Communication

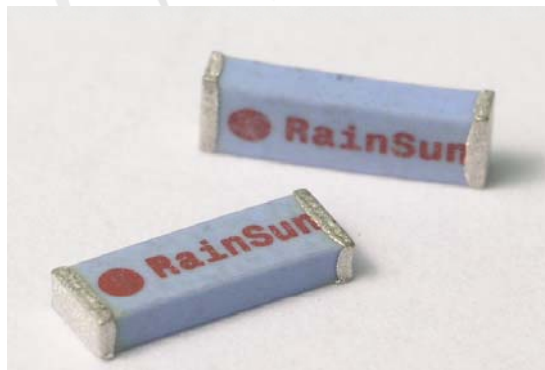

# AN6520 Multilayer Chip Antenna

## ◆ Features

- Light weight and low profile 6.5mm(L)X2.2mm(W)X1.0mm(H)
- Omni-directional in azimuth
- Lead (Pb) Free

## ◆ Applications

- 2.4GHz wireless communications
- 2.4GHz Modules
- Bluetooth System
- 802.11b/g Wireless LAN System

## Specifications


Center frequency	2.45GHz
Peak gain	0.5dBi
Operation temperature	-40 ~ +85 °C
Storage temperature	-40 ~ +85 °C
VSWR	2.0 (max)
Input Impedance	50 Ohm
Power handling	3W (max)
Bandwidth	200MHz
Azimuth beamwidth	Omni-directional
Polarization	Linear

## Pin configuration




Pin No	Pin assignment
1	Feed termination
2	Feed point mark
3	Solder termination

## Dimensions

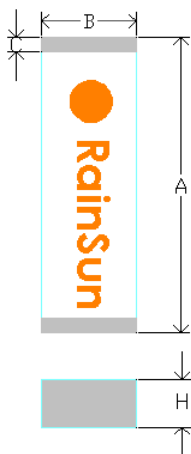

Symbol	Dimensions(mm)
A	$6.50 \pm 0.10$
B	$2.20 \pm 0.10$
C	$0.30 \pm 0.05$
H	$1.00 \pm 0.20$

## PCB foot printer

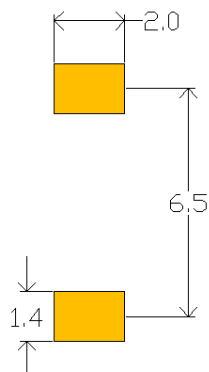

## Recommended Test Board Pattern


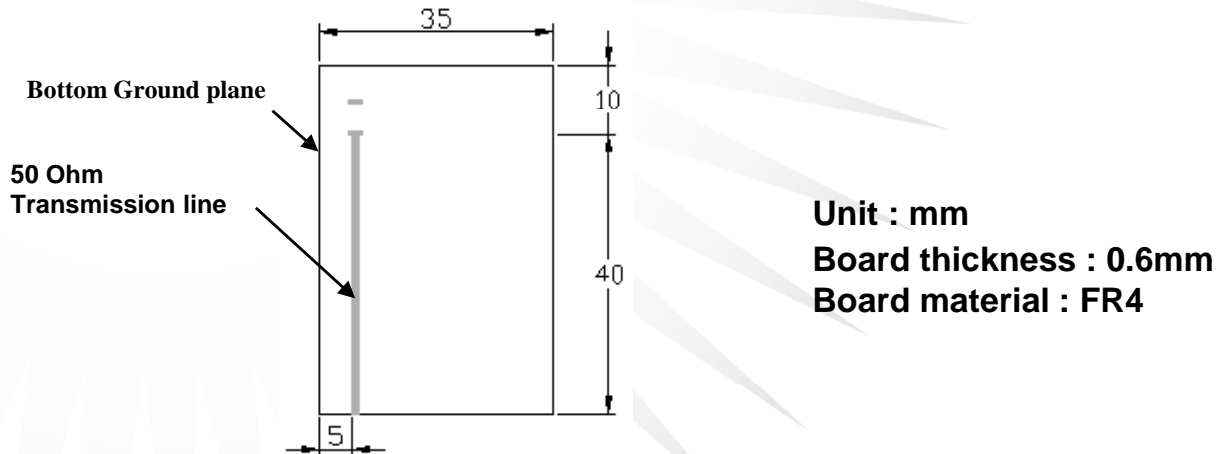


Fig-1

## Testing Setup



## Measurement

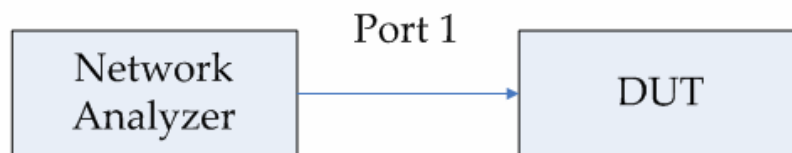

### Testing Instrument:


Anritsu 37369C VNA(Vector Network Analyzer)

VNA calibrate with 1 path reflection only calibration sequence on test board feed point.


The test board dimension and it's layout is the same as Fig-1.

# Typical Electrical Characteristics

## Return loss

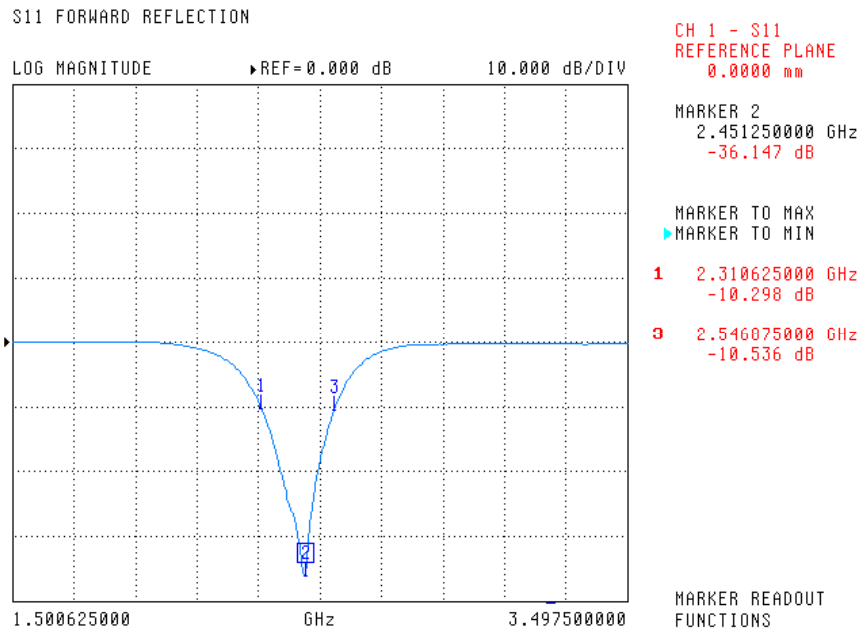


## Smith Chart

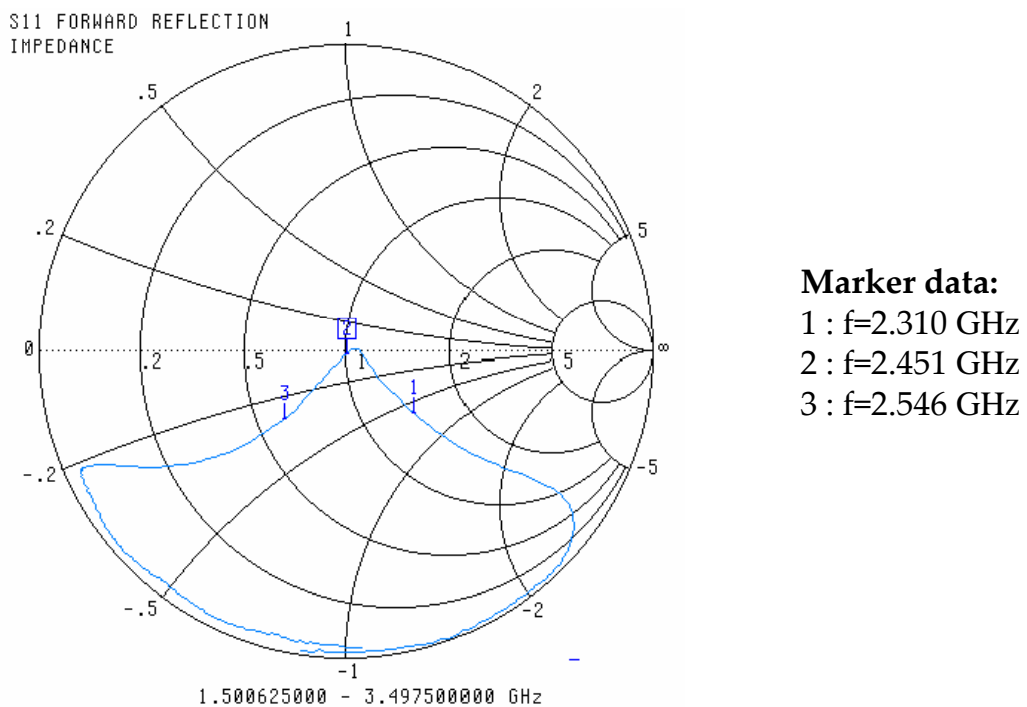


## Typical Radiation Patterns


**2.45 GHz H-Plane  
vertical**

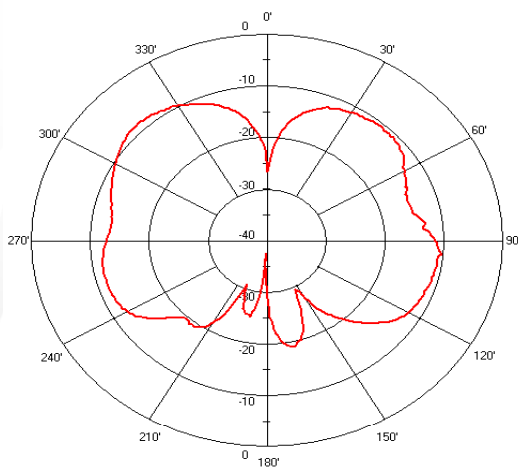


**2.45 GHz H-Plane  
horizontal**

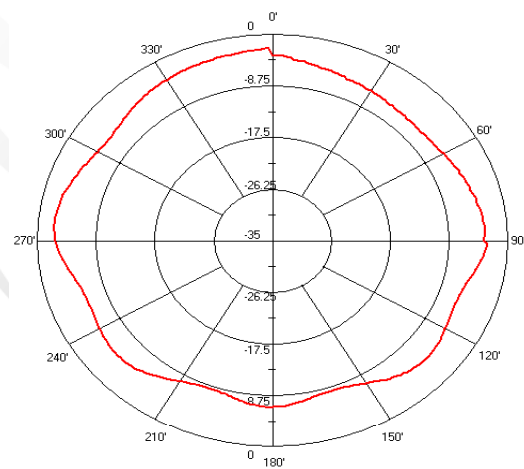


**2.45 GHz E-Plane  
vertical**

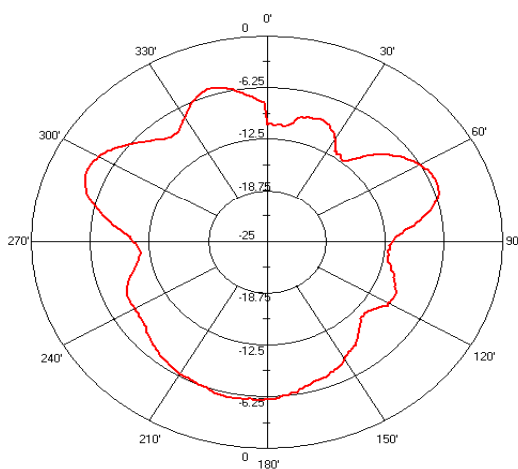


**2.45 GHz E-Plane  
horizontal**

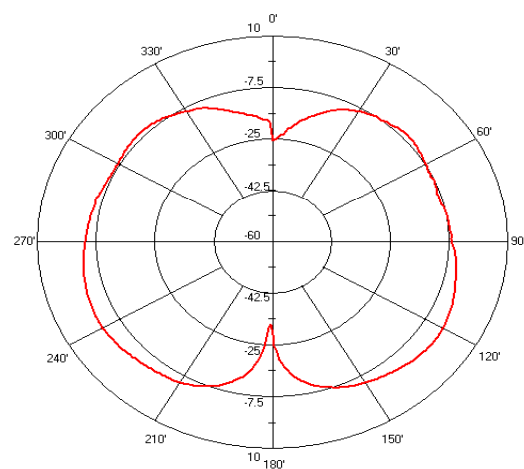

## Typical Soldering Profile for Lead-free Process

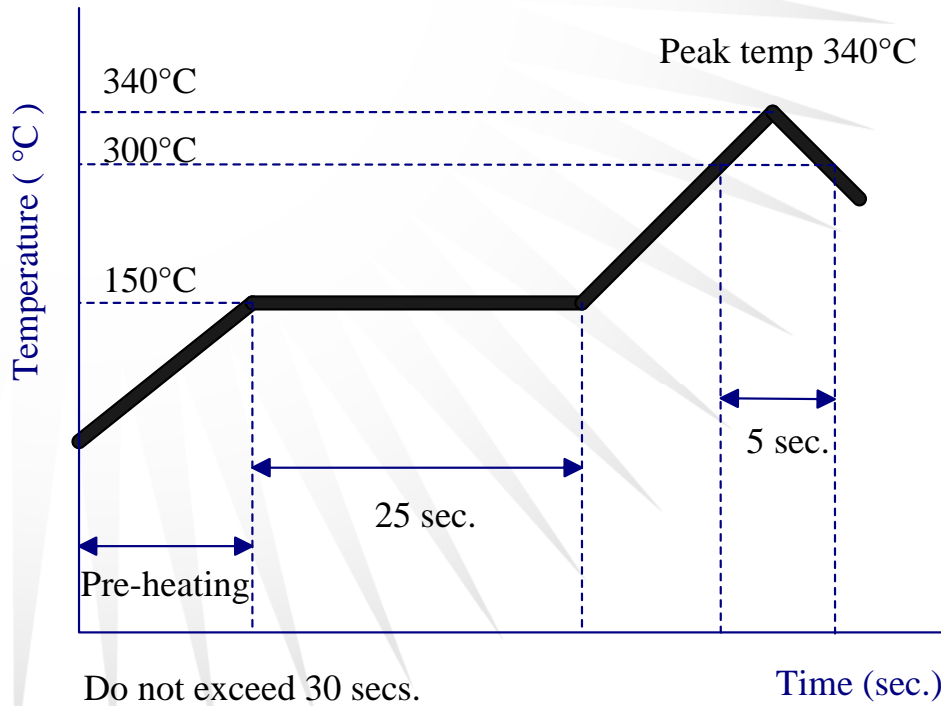


### Reflow Soldering

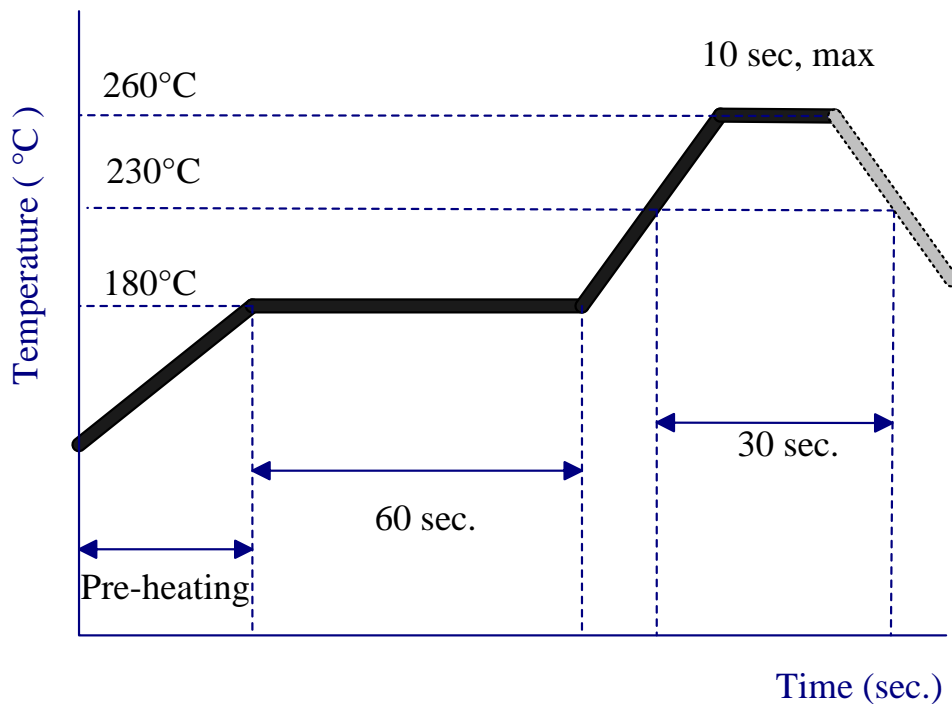

# Packing


## Blister Tape Specifications

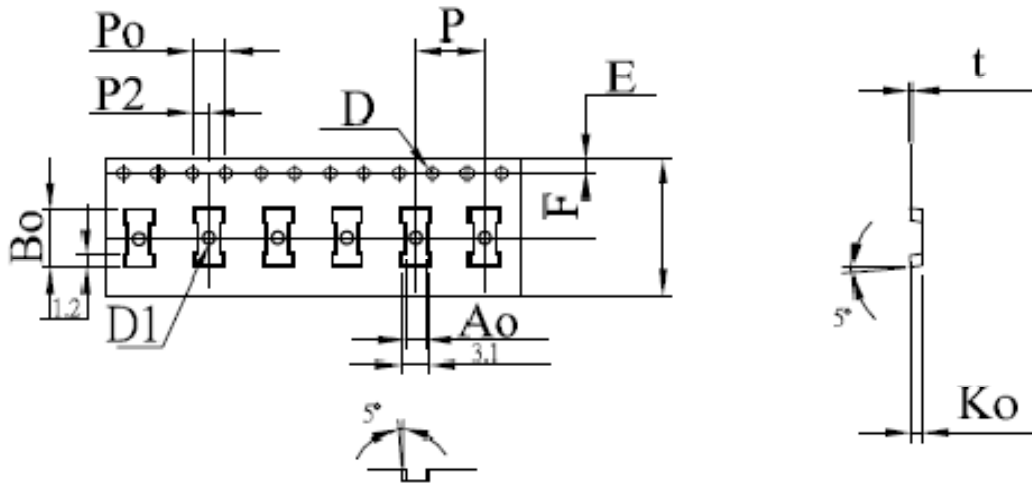

Symbol	Dimension	Tolerance	Unit
W	16.00	$\pm 0.10$	mm
E	1.75	$\pm 0.10$	mm
F	7.50	$\pm 0.10$	mm
D	1.50	+ 0.10 - 0.00	mm
$D_1$	1.50	+ 0.25 - 0.00	mm
$P_0$	4.00	$\pm 0.10$	mm
P	8.00	$\pm 0.10$	mm
$P_2$	2.00	$\pm 0.10$	mm
$A_0$	2.30	$\pm 0.10$	mm
$B_0$	6.60	$\pm 0.10$	mm
$K_0$	1.30	$\pm 0.10$	mm
t	0.30	$\pm 0.05$	mm



# Reel Specifications

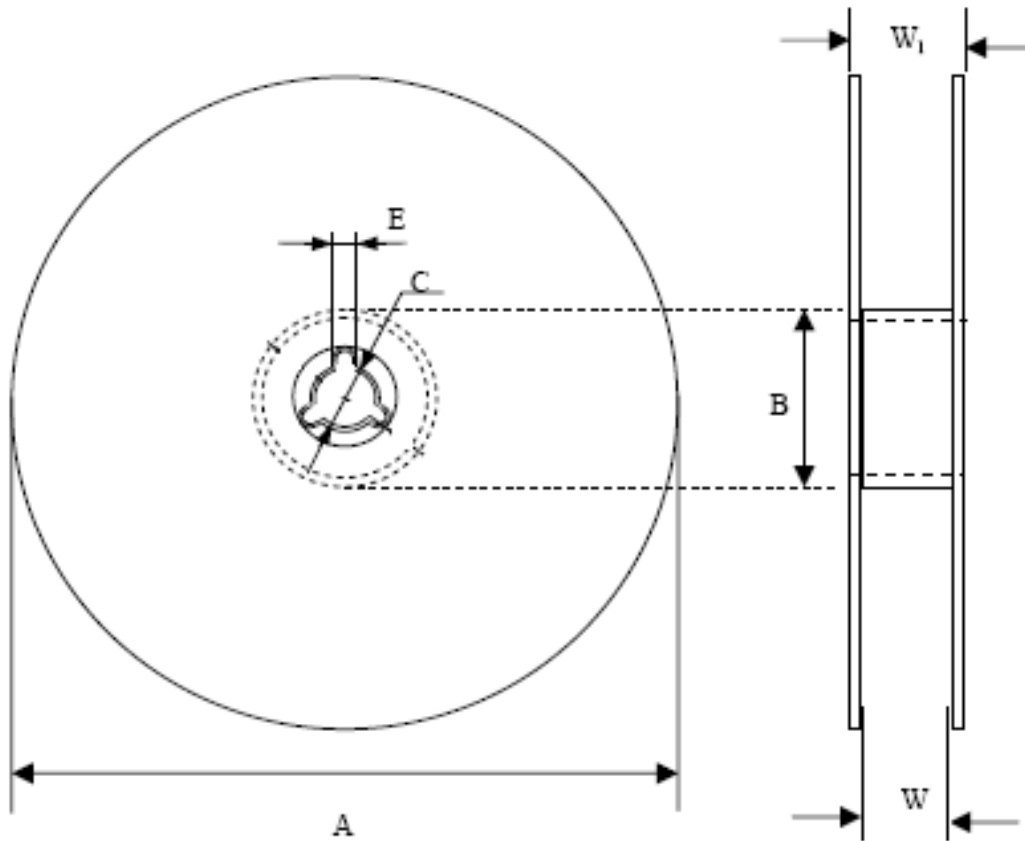

Quantity Per Reel	Tape Width (mm)	A (mm)	C (mm)	B (mm)	E (mm)	W (mm)	W <sub>1</sub> (mm)
1,500	16	180±1	13.0±0.2	62±0.5	2.2±0.5	16±0.5	20±0.2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [Rainsun](#) manufacturer:*

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W6102B0100](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#)  
[A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [A75-](#)  
[001](#) [W3118A](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [C37](#) [MAF94051](#) [FRX380](#) [MA9-5N](#)  
[B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [PSQ24495-91RSM](#) [5200232](#) [MIKROE-2393](#) [DA5-32RADOME](#)  
[5200227](#) [GPSCPMM00](#) [W1049B030](#) [SPDA17RP918](#) [GPSCP00](#) [AN 303](#) [ANTDOM-05-01-WPM](#) [EXW30BNX](#)  
[OSCAR1A/5M/SMAM/S/S/31](#)