


Cable assembly overmold

R284A21C0025

PRELIMINARY

Series : **CORD AUTO**

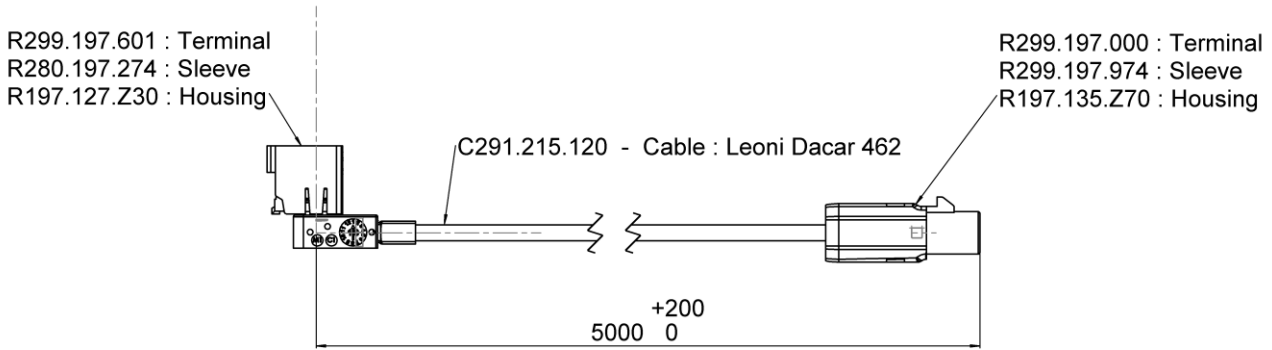

Note:
 Waterproof on female side, only guaranteed with a waterproof plug : R299.197.000 + housing on RG174 cable

- * Right angle connector : **R299.197.601 (terminal) + R280.197.274 (sleeve) + R197.127.Z30 (housing)**
- * Straight connector : **R299.197.000 (terminal) + R299.197.974 (sleeve) + R197.135.Z70 (housing)**
- * Cable : **C291.215.120**

Type : RG174
Leoni DACAR 462

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------------|------------------------------------|
| Impedance | 50 Ω |
| Frequency | 0-3 GHz |
| Operating temperature | -40 + 105 ° C |
| VSWR | 1.4 (0-2 GHz) 1.5 (2-3 GHz) |
| Insertion loss | 0.3 dB |
| Dielectric withstanding voltage | 800 Vrms |
| Insulation resistance | >100 MΩ mini |

SPECIFICATION

| | |
|-----------------------|--------------------------|
| USCAR17 / IP67 | |
| Weight | To be confirmed g |
| Cable retention | 110 N mini |

Electrical and Mechanical sanctions according to the USCAR 17 norm.
 → Pair connectors (150mm)



Cable assembly overmold**R284A21C0025****PRELIMINARY**Series : **CORD AUTO****PACKAGING**

- Quantity → to be confirmed first production
- Label with references on each cardboard

After first production,
We will define photo and label for packaging

STORAGE RECOMMANDATION

Boxes should be stored indoors, in its original packaging (box + plastic bag), in a controlled climate environment not exceeding -20°C/+40°C and maximum 70% relative humidity. The boxes should be protected from direct sunlight and should be used on a "first-in, first-out" basis. It is recommended to use this reference within 1 year from the date of manufacture when stored according the recommended storage condition.

RAYDIALL
AUTOMOTIVE**Edition : 2147 A**

Design changes may be in order to improve the product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Raydiall](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)