


ULTRA PRECISION CHIP RESISTORS

BLU SERIES



RESISTORS • CAPACITORS • COILS • DELAY LINES

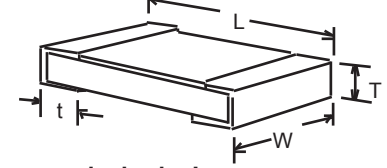

- Industry's widest range of precision chip resistors!
- Tolerance to $\pm 0.01\%$, TCR to 5 ppm/ $^{\circ}\text{C}$

CUSTOM OPTIONS

- Option P: Pulse resistant design
- Option ER: Burn-In for Hi-Rel applications
- Option V: $+200^{\circ}$ operating temperature
- Option A: Marking of resis. code in 3 or 4 digits (not available on BLU0201 or BLU0402)
- Matched sets and TC's to 2ppm available (limited range)

'Blu-Chip' performance at an economical price!

RCD's expertise in the field of ultra-precision resistors since 1973, combined with the latest in automated chip resistor production equipment, enables precision chip resistors at prices comparable to lower grade devices. The BLU-chip design features excellent stability levels. Intermediate and extended-range values are available on custom basis. Popular values are available from stock.

RCD Type	Power @ 70°C	Max. Working Voltage*	TCR ² (PPM/ $^{\circ}\text{C}$)	Standard Resistance Range ¹					Dimensions			
				0.01%	.02%, .05%	0.1%, 0.25%	0.5%, 1%	L	W	T	t	
BLU0201	.05W	15V	10, 15	N/A	N/A	100 Ω - 10K	100 Ω - 10K	.020 \pm .004 [.5 \pm .1]	.01 \pm .002 [.25 \pm .05]	.014 \pm .004 [.35 \pm .1]	.01 \pm .005 [.25 \pm .12]	
			25,50	N/A	N/A	100 Ω - 10K	33 Ω - 22K					
			100	N/A	N/A	100 Ω - 10K	10 Ω - 22K					
BLU0402	.062W	25V	5	50 Ω - 2K	50 Ω - 2K	51 Ω - 2K	50 Ω - 2K	.040 \pm .004 [1.0 \pm .1]	.020 \pm .002 [.5 \pm .05]	.014 \pm .004 [.35 \pm .1]	.01 \pm .005 [.25 \pm .12]	
			10, 15	50 Ω - 12K	50 Ω - 12K	51 Ω - 12K	25 Ω - 12K					
			25	50 Ω - 12K	50 Ω - 12K	10 Ω - 100K	10 Ω - 100K					
			50, 100	50 Ω - 12K	50 Ω - 12K	10 Ω - 100K	10 Ω - 1M					
BLU0603	.1W	75V	5	50 Ω - 8K	50 Ω - 8K	50 Ω - 8K	50 Ω - 8K	.063 \pm .008 [1.6 \pm .2]	.031 \pm .006 [.8 \pm .15]	.018 \pm .006 [.45 \pm .15]	.012 \pm .008 [.3 \pm .2]	
			10, 15	25 Ω - 100K	25 Ω - 100K	10 Ω - 402K	25 Ω - 100K					
			25	25 Ω - 100K	4.7 Ω - 150K	4.7 Ω - 402K	2 Ω - 402K					
			50, 100	25 Ω - 100K	4.7 Ω - 150K	4.7 Ω - 402K	2 Ω - 1M					
BLU0805	.125W	100V	5	50 Ω - 16K	50 Ω - 16K	50 Ω - 16K	50 Ω - 16K	.079 \pm .006 [2.0 \pm .15]	.050 \pm .006 [1.25 \pm .15]	.018 \pm .006 [.45 \pm .15]	.014 \pm .008 [.35 \pm .2]	
			10, 15	25 Ω - 200K	25 Ω - 200K	10 Ω - 499K	25 Ω - 200K					
			25, 50, 100	25 Ω - 200K	4.7 Ω - 500K	4.7 Ω - 1M	1 Ω - 1M					
			5	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K					
BLU1206	.25W	150V	10, 15	25 Ω - 500K	25 Ω - 500K	10 Ω - 1M	25 Ω - 500K	.126 \pm .006 [3.2 \pm .15]	.063 \pm .006 [1.6 \pm .15]	.020 \pm .006 [.50 \pm .15]	.020 \pm .010 [.51 \pm .25]	
			25, 50, 100	25 Ω - 500K	4.7 Ω - 1M	4.7 Ω - 1M	1 Ω - 2M					
			5	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K					
			10, 15	100 Ω - 30K	100 Ω - 330K	100 Ω - 330K	100 Ω - 330K					
BLU1210	.33W	150V	25	51 Ω - 500K	51 Ω - 2M	51 Ω - 2M	51 Ω - 2M	.126 \pm .006 [3.2 \pm .15]	.098 \pm .008 [2.5 \pm .2]	.024 \pm .008 [.61 \pm .2]	.020 \pm .010 [.51 \pm .25]	
			50, 100	51 Ω - 500K	51 Ω - 2M	51 Ω - 2M	10 Ω - 4.7M					
			5	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K	50 Ω - 30K					
			10, 15	25 Ω - 500K	25 Ω - 500K	10 Ω - 1M	25 Ω - 500K					
BLU2010	.5W	150V	25, 50, 100	25 Ω - 500K	4.7 Ω - 1M	4.7 Ω - 1M	1 Ω - 2M	.197 \pm .008 [5 \pm .2]	.098 \pm .008 [2.5 \pm .2]	.024 \pm .008 [.61 \pm .2]	.024 \pm .008 [.61 \pm .2]	
			5	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K					
			10, 15	25 Ω - 500K	25 Ω - 500K	10 Ω - 1M	25 Ω - 500K					
			25, 50, 100	25 Ω - 500K	4.7 Ω - 1M	4.7 Ω - 1M	1 Ω - 2M					
BLU2512	1W	200V	5	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K	.248 \pm .008 [6.3 \pm .2]	.126 \pm .008 [3.2 \pm .2]	.024 \pm .008 [.61 \pm .2]	.024 \pm .008 [.61 \pm .2]	
			10, 15	25 Ω - 500K	25 Ω - 500K	10 Ω - 1M	25 Ω - 500K					
			25, 50, 100	25 Ω - 500K	4.7 Ω - 1M	4.7 Ω - 1M	1 Ω - 2M					
			5	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K	50 Ω - 50K					


*Maximum working voltage determined by $E = \sqrt{PR}$, E should not exceed value listed. Increased voltage ratings available. ¹Extended range available, consult factory. ²TC measured 25 $^{\circ}$ -100 $^{\circ}\text{C}$

TYPICAL PERFORMANCE CHARACTERISTICS

Requirements	Characteristics (5-25ppm)*	Test Method
Short Time Overload, 5 Sec.	$\pm 0.1\%$ ΔR	Rated W x 2.5, nte 2x Max..Voltage
Resistance to Solder Heat	$\pm 0.05\%$ ΔR	260 \pm 5 $^{\circ}\text{C}$, 3 seconds
High Temperature Exposure	$\pm 0.1\%$ ΔR	100 hours @ +125 $^{\circ}\text{C}$
Thermal Shock	$\pm 0.1\%$ ΔR	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$, 0.5 hrs, 5 cycles
Moisture Resistance	$\pm 0.2\%$ ΔR	Mil-STD-202 M103 95% RH 1000hrs
Load Life (1000 hours)	$\pm 0.1\%$ (\pm .25% 10,000 hrs)	Mil-PRF-55342G 4.8.11.1 ceramic
Solderability	95% (Min.)	MIL-Std-202, Method 208
Shelf Life	100 ppm/year (Max.)	Room Temp. & Humidity, No-Load
Dielectric Withstand Voltage	250V (100V 0402 & 0603)	60 Seconds, terminal to ceramic

* The typical ΔR of chips with 50-100ppm TC is double that of chips with 5 to 25ppm TC

CONSTRUCTION

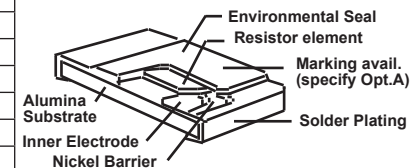


To ensure utmost reliability, care should be taken to avoid potential sources of ionic contamination.

P/N DESIGNATION: BLU1206 - 1002 - B T 25 W

RCD Type BLU
 Options: P, ER, A (leave blank if standard)
 4-Digit Resistance Code: 3 signif. digits & multiplier (10R0=10 Ω , 1000=100 Ω , 1001=1K Ω)
 Tolerance Code: F=1%, D=0.5%, C=0.25%, B=0.1%, A=0.05% Q=0.02%, T=0.01%
 Packaging: B = Bulk, T = Tape & Reel
 TC: 5=5ppm, 10=10ppm, 15=15ppm, 25=25ppm, 50=50ppm, 101=100ppm
 Termination: W = Lead-free (std), Q = Tin/Lead (leave blank if both acceptable)

DERATING CURVE

Resistors may be operated up to full rated power with consideration of mounting density, pad geometry, PCB material, and ambient temperature.

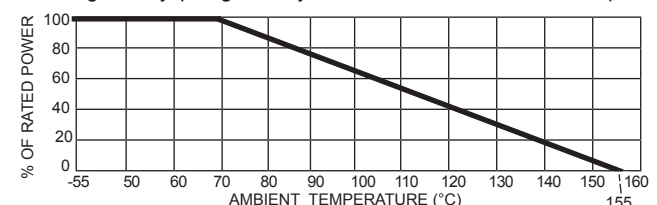

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thin Film Resistors - SMD category](#):

Click to view products by [RCD manufacturer](#):

Other Similar products are found below :

[7-2176089-6](#) [MCW0406MD1001DP500](#) [FCR1206J22R](#) [FCR1206J33R](#) [1-2176090-3](#) [1-2176089-6](#) [ERA-3EEB2742V](#)
[NCSR250F4M50DTRGF](#) [2176089-1](#) [2176090-4](#) [2176091-3](#) [CMB02070X3000GB200](#) [CPA2512Q6R80FS-T10](#) [4-1625868-7](#) [5-1625868-9](#) [5-18022-5](#) [ERA-3EEB2671V](#) [CFR0W4J0220A2P](#) [P1206Y1804FNTA](#) [CPA2512E68R0FS-T10](#) [CPA2512Q4R70FS-T10](#) [8-2176091-9](#) [2-2176091-0](#) [NCSR150FR003DTRT3F](#) [NTR06B5832CTRF](#) [NCSR200JR002DTRF](#) [RSJ372NL](#) [NRC-S12F4751TRF](#) [8-1625868-1](#) [1-2176092-4](#) [4-2176093-9](#) [2176091-9](#) [RT1220P-101-M](#) [PLTU0805U1003LST5](#) [PLTU0603U2001LST5](#) [PLTU0805U1001LST5](#) [PLTU0603U4702LST5](#)
[4-2176089-0](#) [8-2176091-0](#) [6-2176091-8](#) [3-2176090-3](#) [1-2176092-7](#) [7-2176092-6](#) [7-2176088-7](#) [PCNM2512E1502BST5](#) [2-2176094-5](#)
[PCNM2512E3012BST5](#) [4-2176092-6](#) [3-2176091-4](#) [8-2176091-5](#)