

# SURGE RESISTORS, 1/8W to 15W, 2KV to 25KV



RESISTORS • CAPACITORS • COILS • DELAY LINES

## PR SERIES




Term. "W" is Pb-free and RoHS compliant; "Q" is Sn-Pb

- Cost effective high-voltage surge resistors to 200 joules
- Available on RCD's exclusive **SWIFT™** program
- Molded surface mount version available ([PRM series](#))

### OPTIONS

- Opt. ER: Group A Screening per MIL-R-39008 RCR
- Opt. F: Flameproof coating
- Opt. B: Increased power (see Specifications table)
- Opt. X: Non-inductive (see Performance Char. table)
- Custom marking, cut & form, burn-in, etc.

**Excellent Low Cost Replacement for Composition Resistors**  
 Series PR pulse resistors withstand higher energy pulses than conventional film & wirewound types, without the performance disadvantages of carbon comp resistors. The heavy duty construction features a high thermal conductivity core and coating, enabling improved stability and environmental performance. Series PR satisfy a wide variety of pulse applications including lightning, snubber, in-rush current, capacitor charge, etc. RoHS (Sn) or Mil-spec (Sn-Pb) termination finish available.




### SPECIFICATIONS

RCD Type	Wattage Rating		Max. Continuous Voltage <sup>1,5,8</sup>	Max. Peak Pulse Voltage <sup>2,5,8</sup>	Resistance Range <sup>5</sup>	L (Body Length)	D <sup>6</sup> (Body Dia.)	d±.004 [.1]	H <sup>4</sup> (min)
	Standard	Option B							
PR1/8	1/8W	1/2W	150V	2KV	0.1Ω-2K	.145±.025 [3.69±.64]	.062±.015 [1.6±.38]	.018 [.46]	1.0 [25.4]
PR1/4	1/4W	1W	250V	3.5KV	0.1Ω-10K	.240±.032 [6.1±.8]	.085±.025 [2.16±.64]	.022 [.56]	1.0 [25.4]
PR1/2	1/2W	2W	350V	5KV	0.1Ω-24K	.375±.040 [9.2±1]	.156±.025 [3.96±.64]	.028 [.7]	1.25 [32]
PR1	1W	4W	500V	10KV	0.1Ω-100K	.600±.040 [15.2±1]	.225±.032 [5.72±.8]	.031 [.8] <sup>3</sup>	1.25 [32]
PR2	2W	5W	750V	15KV	0.1Ω-200K	.875±.062 [22.2±1.6]	.312±.040 [7.92±1]	.039 [1] <sup>3</sup>	1.375 [35] <sup>7</sup>
PR5	5W	10W	800V	18KV	0.1Ω-220K	1.05±.062 [26.7± 1.6]	.350±.040 [8.89±1]	.039 [1]	1.375 [35]
PR10	10W	15W	1000V	25KV	0.1Ω-510K	1.72±.062[43.7±1.6]	.350±.040 [8.89±1]	.039 [1]	1.375 [35]

<sup>1</sup> Max voltage = √(PxR), not to exceed value listed. <sup>2</sup> Pulse voltage & energy capability is dependent on res. value, waveform, repetition rate, & environmental conditions (refer to R-42 for derating factors). <sup>3</sup> .040" (1mm) lead dia. is available on PR1 (specify PR1-18), .032" [.8mm] lead dia. is available on PR2 (specify PR2-20) <sup>4</sup>Lead length is for bulk packaging, taped parts may be shorter (consult taping dimensions). <sup>5</sup>Expanded range avail. <sup>6</sup>Allow .024" [.6mm] additional for Opt. X or values <1Ω <sup>7</sup>Specify Opt. 56 for 1.5" [38.1] min. lead length, Opt. 70 for 2" [50.8] lead length <sup>8</sup>Multiply by 0.7 on Opt.X parts.

### SURGE CAPABILITY

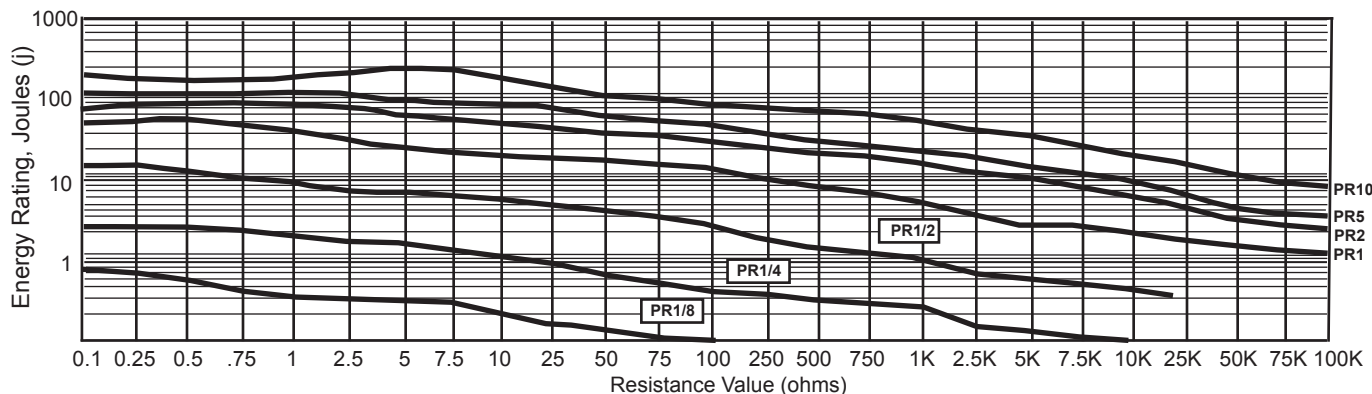

### PERFORMANCE CHARACTERISTICS, Typ.

Derating, Wattage & Voltage	PR1/8-PR2: 1.25%/°C >70°C, PR5-PR10 & Opt. B: 0.8%/°C >25°C
Max. Induc*: Opt. X≤50Ω	0.2uH PR1/8X-PR1/2X, 0.3uH PR1X-PR2X, 0.7uH PR5X-PR10X
Max. Induc*: Opt. X>50Ω	0.37uH PR1/8X-PR1/2X, 0.6uH PR1X-PR2X, 1.4uH PR5X-PR10X
Short-time Overload	±0.5%
Temperature Cycling	±0.5%
TCR (20 & 50ppm avail.)	±100ppm/°C (<0.2Ω=200ppm)
Moisture Resistance	±1%
Shock and Vibration	±0.2%
Effect of Soldering	±0.2%
Voltage Coefficient	±0.005%/V
Load Life	±0.5% Std, ±1% Opt.B
Operating Temp Range	-55 to +150°C, +275°C avail.
Dielectric Strength (1KV avail.)	500V (PR1/8 & PR1/4 =300V)

\* specify Opt.75 for induc levels 50% that of Opt.X, or Opt.76 for 33% that of Opt.X

### APPLICATION NOTE

Use chart above to select model to meet desired surge level. Pulse not to exceed peak V & j ratings (derate 30% for Opt.X), and average power during repetitive pulses nte rated W. A safety factor of 30% typ. is recommended for infrequent pulses, 50% typ. for repetitive pulses (refer to Note R42 for derating factors attributable to pulse width, rep. rate, temp., altitude, humidity). Verify by evaluating under worst-case conditions. Depending on specifics, PR series can often satisfy the surge requirements of UL-217, -268, -294, -497, -508, -913, -943, -991, -1459, -1971, ANSI/IEEE C62.41, CCITT (Rec. K17), Bellcore TR-NWT-001089 & TR-TSY-000057, CSA C22.2-225, IEC 664, IEC 801.5, IEEE587, Can.Doc. CS-03, FCC Part 68., etc. Consult factory for assistance.

### P/N DESIGNATION:

**PR1/2** □ **-102** - **K** **T** □ **W**  
**RCD Type** \_\_\_\_\_  
**Options:** X, S, F, ER, B (leave blank if std) \_\_\_\_\_  
**Resis. Code** 1% tol: 3 signif. figures & multiplier, \_\_\_\_\_  
 e.g. R100=0.1Ω, 1R00=1Ω, 10R0=10Ω, 1000=100Ω, 1001=1K.  
 2%-10%: 2 signif.fig. & multiplier (R10=0.1Ω, 1R0=1Ω, 100=10Ω, 102=1K)  
**Tolerance:** J=5% (standard), F=1%, G=2%, K=10% \_\_\_\_\_  
**Packaging:** B = bulk, T = Tape & Reel \_\_\_\_\_  
**Optional TC:** 20 =20ppm, 50= 50ppm (leave blank if standard) \_\_\_\_\_  
**Termination:** W= RoHS (std), Q= Tin/Lead (leave blank if either is acceptable) \_\_\_\_\_

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [rcd](#) manufacturer:*

Other Similar products are found below :

[630-8R60-FBW](#) [640B-R100-FBW](#) [605B-1R50-FBW](#) [CC1-104-KBW](#) [PR1-3R3-JBW](#) [LVF15-R010-FBW](#) [210-1R00-FBW](#) [635B-3R00-FBW](#)  
[PWLL25-302-JBW](#) [605B-R100-FBW](#) [210-10R0-FBW](#) [160-1R00-FBW](#) [610Q2-331-JBW](#) [160-2500-FBW](#) [135X-800-JBW](#) [135-1500-FBW](#)  
[235-1001-FBW](#) [610Q-1250-FBW](#) [135-180-JBW](#) [175-5000-FBW](#) [135-5R00-FBW](#) [610-1R00-FBW](#) [160-510-JBW](#) [175-131-JBW](#) [232-1000-](#)  
[FBW](#) [PW5-251-JBW](#) [PW5-500-JBW](#) [RSF1B-4R7-JBW](#) [RMF3-103-JBW](#) [135-2500-FBW](#) [135-821-JBW](#) [160-120-JBW](#) [630X-100-JBW](#)  
[LVF15-R040-FBW](#) [135-152-JBW](#) [160-3002-FBW](#) [160-244-JBW](#) [610-5001-FBW](#) [160-1R5-JBW](#) [255-1000-FBW](#) [175-R500-FBW](#) [160-331-](#)  
[JBW](#) [175-2R4-JBW](#) [160-R100-FBW](#) [175-820-JBW](#) [PW5-912-JBW](#) [160-121-JBW](#) [610-5R00-FBW](#) [620-103-JBW](#) [125P-151-JBQ](#)