

PULSE RESISTORS, SURFACE MOUNT

PRM SERIES





Term.W is
RoHS
compliant
& 260°C
compatible

- High voltage/ high surge capability
- Cost effective surface mount package
- Available on RCD's exclusive **SWIFT™** program

OPTIONS

- Option ER: Group A Screening per MIL-R-39008 RCR
- Option B: Increased power
- Option X: Non-inductive

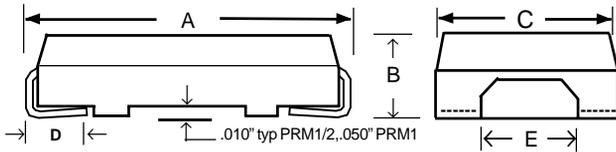

SUGGESTED
PAD LAYOUT

Pulse tolerant surface mount resistors!


Series PRM withstand high energy pulses, and are superior to conventional film & wirewound types. The heavy duty construction features a ceramic core, enabling improved thermal transfer and long term stability. Elements are protected by flame-retardant molding for excellent environmental performance. Alpha-numeric marking is standard. PRM resistors are cost effective in a wide variety of pulse applications including telecom line feed resistors, snubber circuits, in-rush currents, capacitor charge/discharge circuits, lightning surges, etc.

SPECIFICATIONS

RCD Type	Wattage Rating Std	Wattage Rating Opt B	Max. Voltage ^{1,3,4}	Max. Peak Pulse Voltage ^{2,4}	Resistance Range	DIMENSIONS Inch [mm]							
						A	B	C	D	E	F	G	H
PRM1/8	.125W	.5W	150V	2KV	0.1Ω - 2K	.200 ± .02 [5.1 ± .5]	.096 ± .015 [2.44 ± .38]	.120 ± .01 [3.18 ± .25]	.025 Min. [.63]	.045 ± .015 [1.14 ± .38]	.080 [2.0]	.100 [2.5]	.08 [2.0]
PRM1/4	.25W	1W	250V	3.5KV	0.1Ω - 10K	.258 ± .02 [6.55 ± .5]	.110 ± .015 [2.79 ± .38]	.150 ± .015 [3.81 ± .38]	.032 Min. [.8]	.060 ± .015 [1.5 ± .38]	.100 [2.5]	.125 [3.2]	.120 [3.0]
PRM1/2	.5W	2W	350V	5KV	0.1Ω - 24K	.472 ± .024 [12 ± .6]	.208 ± .02 [5.3 ± .5]	.228 ± .016 [5.8 ± .4]	.050 Min. [1.27]	.070 ± .02 [1.78 ± .5]	.160 [4.0]	.180 [4.57]	.200 [5.0]
PRM1	1W	4W	500V	10KV	0.1Ω - 100K	.811 ± .020 [20.6 ± .5]	.275 ± .020 [6.99 ± .5]	.273 ± .020 [6.93 ± .5]	.063 Min. [1.6]	.102 ± .028 [2.6 ± .7]	.200 [5.0]	.200 [5.0]	.600 [15.2]

¹Rated continuous voltage = $\sqrt{P \times R}$, nte value listed. ²Pulse voltage capability is dependent on res.value, waveform, & repetition rate. ³Expanded range available ⁴Multiply by 0.7 on Opt.X parts

SURGE CAPABILITY

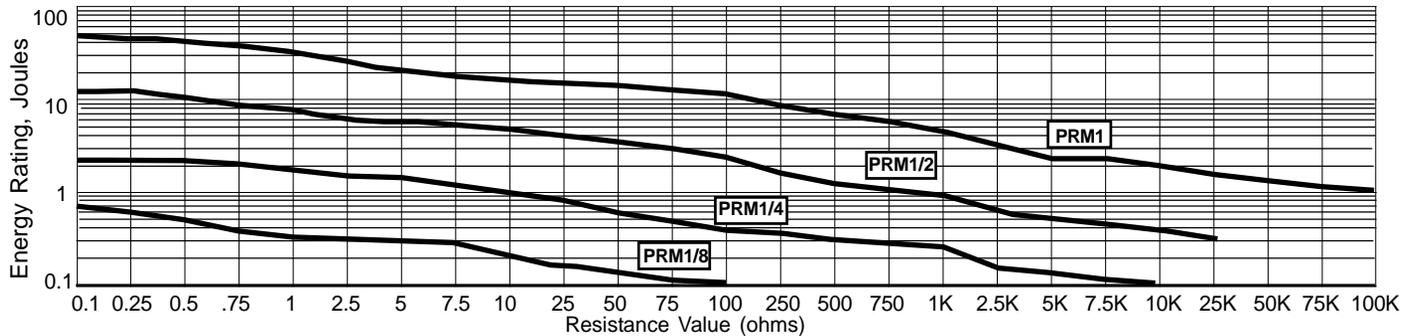

TYPICAL PERFORMANCE CHARACTERISTICS

Wattage Derating	1.25%/°C >70°C (Opt. B to be derated 0.8%/°C >25°C)
Max.Induc*: Opt. X≤50Ω	0.2uH PRM1/8-1/2, .3uH PRM1
Max.Induc*: Opt. X>50Ω	0.37uH PRM1/8-1/2, .6uH PRM1
Short-time Overload	±0.5%
Temperature Cycling	±0.5%
TCR (20ppm avail.)	±120ppm/°C (<0.2Ω=200ppm)
Moisture Resistance	±1%
Shock and Vibration	±0.2%
Effect of Soldering	±0.2%
Voltage Coefficient	±0.005%/V
Load Life	±0.5% Std, ±1% Opt.B
Operating Temp Range	-55 to +150°C, +275°C avail.
Dielectric Strength	500V (1KV avail.)

* specify Opt.75 for induc levels 50% that of Opt.X, or Opt.76 for 33% that of Opt.X

APPLICATION NOTE

Use chart above to select model to meet desired surge level. Pulse not to exceed peak V & j ratings (derate 30% for Opt.X), and average power during repetitive pulses nte rated W. 30% safety factor is recommended for infrequent pulses, 50% typ. for repetitive pulses (request Note R42 for derating factors attributable to pulse width, rep. rate, temp., altitude, humidity). Verify by evaluating under worst-case conditions. Depending on specifics, PR series can often satisfy the surge requirements of UL-217, -268, -294, -497, -508, -913, -943, -991, -1459, -1971, ANSI/IEEE C62.41, CCITT (Rec. K17), Bellcore TR-NWT-001089 & TR-TSY-000057, CSA C22.2-225, IEC 664, IEC 801.5, IEEE587, Can.Doc. CS-03, FCC Part 68., etc. Consult factory for assistance.

P/N DESIGNATION:

PRM1 - **102** - **K** **T** **W**

RCD Type _____

Options: X, ER, B (leave blank if std)

Resis. Code 1% tol: 3 signif. figures & multiplier, e.g. R100=0.1Ω, 1R00=1Ω, 10R0=10Ω, 1000=100Ω, 1001=1K. 2%-10%: 2 signif. fig. & multiplier (R10=0.1Ω, 1R0=1Ω, 100=10Ω, 102=1K)

Tolerance: J=5% (standard), F=1%, G=2%, K=10%

Packaging: B = bulk, T = Tape & Reel

Optional TC: 20 = 20ppm, 50 = 50ppm (leave blank if standard)

Termination: W= Lead-free, Q= Tin/Lead (leave blank if either is acceptable, in which case RCD will select based on lowest price and quickest delivery)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [RCD](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)