



**General Specification**  
 Current Rating: 1.5A DC /Contact, 2amp DC for LED signals  
 Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals  
 Operating Environment: -20°C~+70°C  
 Standard Temperature: -40°C~+85°C  
 Industrial Temperature: 20~70°C  
 Humidity: 20~70%  
 Contact Resistance: ≤30mΩ  
 Insulation Resistance: ≥5000Ω  
 Dielectric Strength: 500V AC/50HZ/Min  
 Mating And Unmating Force: 3~20N  
 Durability: 750 Cycles Min

**Material Specification**  
 Housing :Thermo-plastic, UL94V-0  
 Contact : Alloy Copper  
 Shield : Alloy Copper  
 Please refer to the customer drawing when customer has specified

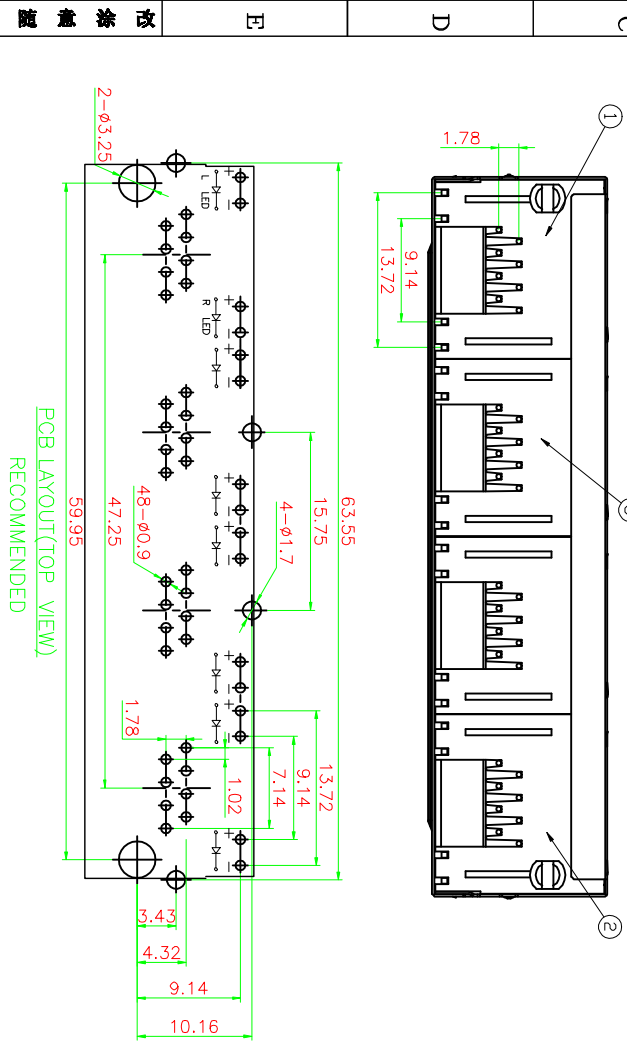

网络插座外形图

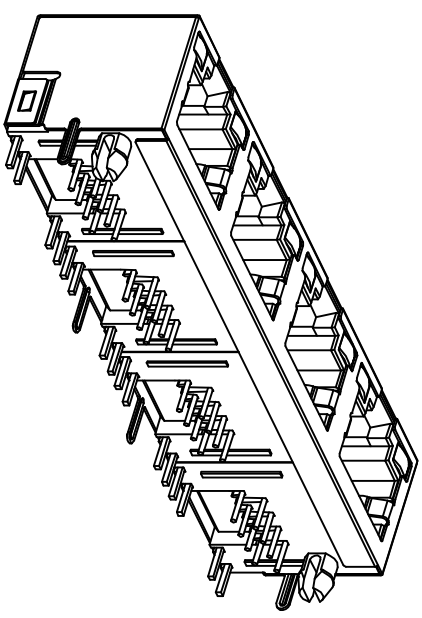

**温州瑞川电子有限公司**  
 WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

序号	名称	材料	数量	镀层/颜色	备注
6	外壳	BS2	1	NI	
5	LED灯	树脂/TE	8	NI/AG	
4	插针	PHOSPHOR BRONZE	32	FU*	
3	中分体	PA46	2	BLACK	
2	右分体	PA46	1	BLACK	
1	左分体	PA46	1	BLACK	

网络插座外形图

一般公差  
 30~ ±0.25  
 10~30 ±0.30  
 ~10 ±0.15  
 角度: ±2°  
 版本: 1 of 1  
 单位:mm 比例: 1:1 纸张: A4

日期: \_\_\_\_\_  
 日期: \_\_\_\_\_  
 日期: \_\_\_\_\_

品名: RCH-56-31-14(带灯无弹)  
 料号: 563114-8YCG02010AB30 (RC00543)  
 型号: RJ45 图号: \_\_\_\_\_

绘图: \_\_\_\_\_  
 审核: \_\_\_\_\_  
 核准: \_\_\_\_\_

变更单号: \_\_\_\_\_  
 绘制日期: \_\_\_\_\_  
 该图面供温州瑞川电子有限公司内部使用,不得私自复印

变更履历

版本: A/0  
 新出版发行

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:*

*Click to view products by [RCH manufacturer](#):*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)  
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)  
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#)  
[AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102277](#) [AX102651](#) [AX102660](#) [AX104024](#)  
[203475](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [30-8956](#) [30-8964-100](#) [SM85](#) [SM99S01VBNN04G7](#) [17-103540](#) [191587](#) [PDI-68-RV](#) [PHP-8P8C-S-5](#)