


PCB LAYOUT(TOP VIEW)
RECOMMENDED

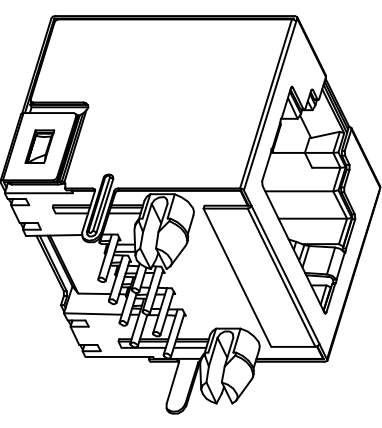

General Specification
Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20°C~+70°C
Industrial Temperature: -40°C~+85°C
Humidity: 20~70%
Contact Resistance: ≤30mΩ
Insulation Resistance: ≥500MΩ
Dielectric Strength: 500V AC/(50HZ) /Min
Mating And Unmating Force: 3~20N
Durability: 750 Cycles Min

Material Specification
Housing: Thermo-plastic, UL94V-0.
Contact: Alloy Copper
Shield: Alloy Copper
Please refer to the customer drawing when customer has specified

网络插座外形图

序号	名称	材料	数量	镀层/颜色	备注
3	外壳	HS2	1	NI	
2	插针	PHOSPHOR BRONZE	8	FU*	
1	塑座	PBT	1	YELLOW	



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

网络插座外形图		图号:	日期:	审核:		日期:		日期:		日期:	
A/0		2022.4.6	张英飞	林晓		林晓		林晓		林晓	
1		30~	±0.30	10~30		±0.20		~10		±0.15	
2		角度:	±2°	版本:		RJ45		单位:mm		比例: 1:1	
3		1 of 1	1	图号:		RJ45		A4		A4	
变更历史		变更单号									
新版发行		该图面供温州瑞川电子有限公司内部使用,不得私自复印									

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [RCH manufacturer](#):

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#)
[AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102277](#) [AX102651](#) [AX102660](#) [AX104024](#)
[203475](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [30-8956](#) [30-8964-100](#) [SM85](#) [SM99S01VBNN04G7](#) [17-103540](#) [191587](#) [PDI-68-RV](#) [PHP-8P8C-S-5](#)