
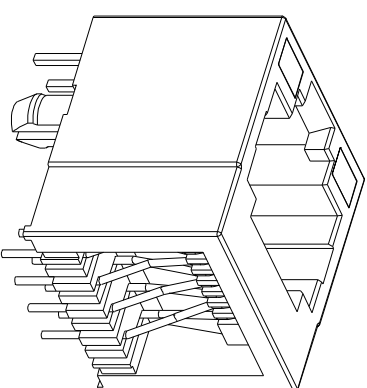


General Specification
 Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
 Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
 Operating Environment
 Standard Temperature: -20°C~+70°C
 Industrial Temperature: -40°C~+85°C
 Humidity: 20~70%
 Contact Resistance: $\leq 30m\Omega$
 Insulation Resistance: $\geq 500M\Omega$
 Dielectric Strength: 500V AC/(50HZ) /Min
 Mating And Umating Force: 3~20N
 Durability: 750 Cycles Min

Material Specification
 Housing :Thermo-plastic, UL94V-0,
 Contact :Alloy Copper
 Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

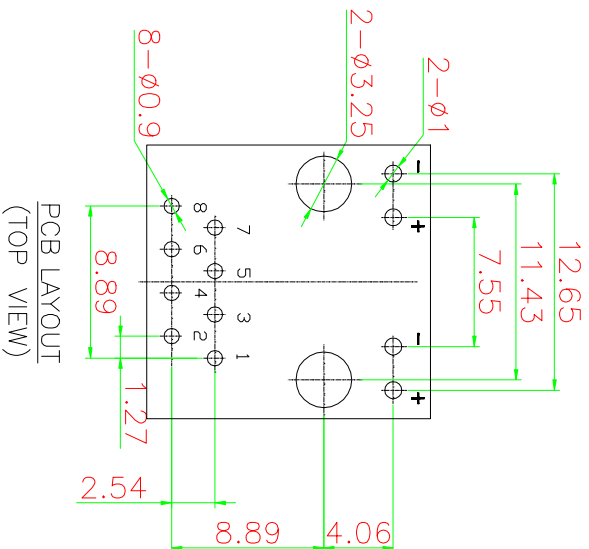

| 序号 | 名称 | 材 | 料 | 数量 | 镀层/颜色 | 备注 |
|----|------|-----------------|---|----|-----------------|----|
| 3 | LED灯 | 树脂/FE | | 2 | NI/AG | |
| 2 | 插针 | PHOSPHOR BRONZE | | 8 | FU ² | |
| 1 | 塑座 | PA46 | | 1 | BLACK | |

网络插座外形图

温州瑞川电子有限公司
 WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

绘图: 魏飞
 日期: 2022.4.8

品名: RCH-52-42-03(带灯全塑)黄绿 负正
 料号: 5242CB-8YG10010AB25 (WR01928)

审核: 陈清德
 日期:

型号: RJ45
 图号:

核准: 陈宇
 日期:

版本: 单位:mm
 比例: 1:1
 纸张: A4

| 版本号 | 变更履历 | 变更单号 | 绘制 | 日期 | 核准 | 日期 |
|-----|-------|------|----|----|----|----|
| A/0 | 新出版发行 | | | | | |
| 1 | 变更履历 | | | | | |

该图面供温州瑞川电子有限公司内部使用,不得私自复印

1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [RCH manufacturer](#):

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#)
[AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102277](#) [AX102651](#) [AX102660](#) [AX104024](#)
[203475](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [30-8956](#) [30-8964-100](#) [SM85](#) [SM99S01VBNN04G7](#) [17-103540](#) [191587](#) [PDI-68-RV](#) [PHP-8P8C-S-5](#)