

**!NOT RECOMMENDED FOR NEW DESIGNS!**

**RECOM**  
AC/DC Converter

## Features

- Continuous short circuit protection
- Efficiency up to 79%
- Universal input 80-264VAC

## Regulated Converters

- 100mW no load power consumption
- Isolated output 3.75kVAC / 1 min
- EN, UL and CE/EAC certified

## RAC04-C/230

4 Watt  
Single &  
Dual Output



## Description

The RAC04-C/230 series are fully certified single and dual regulated AC/DC converters in an encapsulated PCB-mount package style with 3.75kVAC isolation and very low standby power consumption. The converters have SC protected single as well as dual outputs and meet EN55032 class B without any external components. Uses include board-level power supplies, home automation, instrumentation systems and standby applications.

## Selection Guide

| Part Number      | Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ [%] | Max. Capacitive Load <sup>(1)</sup> [µF] |
|------------------|---------------------------|----------------------|---------------------|--------------------|--|
| RAC04-3.3SC/230  | 80-264                    | 3.3                  | 1200                | 72                 | 10000                                    |
| RAC04-05SC/230   | 80-264                    | 5                    | 800                 | 75                 | 7200                                     |
| RAC04-12SC/230   | 80-264                    | 12                   | 333                 | 77                 | 1000                                     |
| RAC04-15SC/230   | 80-264                    | 15                   | 267                 | 78                 | 820                                      |
| RAC04-24SC/230   | 80-264                    | 24                   | 167                 | 79                 | 220                                      |
| RAC04-0512DC/230 | 80-264                    | 5/12                 | 720/33              | 75                 | 4700/100                                 |
| RAC04-05DC/230   | 80-264                    | ±5                   | ±400                | 76                 | ±3300                                    |
| RAC04-12DC/230   | 80-264                    | ±12                  | ±166                | 78                 | ±680                                     |

### Notes:

Note1: measured at 115VAC

## Model Numbering



### Ordering Examples:

- e.g. RAC04-3.3SC/230, 3.3VDC single output
- e.g. RAC04-05DC/230, 5VDC dual output

**PREFERRED ALTERNATIVES**  
Please consider these alternatives:

**RAC04-K/277 Series**

**RAC10-K/277 Series**

- IEC/EN60950-1 certified
- IEC/EN62368-1 certified
- UL60950-1 certified
- CSA/CAN 22.2 60950-1-07 certified
- CB Report
- EN55032 compliance
- EN55024 compliance

Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)

**BASIC CHARACTERISTICS**

| Parameter                              | Condition                    | Min.             | Typ.     | Max.             |
|--|------------------------------|------------------|----------|------------------|
| Input Voltage Range <sup>(2)</sup>     |                              | 80VAC<br>113VDC  |          | 264VAC<br>373VDC |
| Input Current                          | 115VAC<br>230VAC             |                  |          | 98mA<br>64mA     |
| Inrush Current                         | <0.5ms<br>cold start at 25°C | 115VAC<br>230VAC |          | 15A<br>30A       |
| No load Power Consumption              | 115VAC/230VAC                |                  |          | 100mW            |
| Input Frequency Range                  | AC Input                     | 47Hz             |          | 440Hz            |
| Hold-up time                           | 115VAC                       |                  | 15ms     |                  |
| Internal Operating Frequency           | 100% load at nominal Vin     |                  | 67kHz    |                  |
| Minimum Load                           |                              | 0%               |          |                  |
| Output Ripple and Noise <sup>(3)</sup> |                              |                  | 200mVp-p |                  |


**Notes:**

Note2: Refer to line derating graph on page PA-4


Note3: Ripple and Noise is measured at 20MHz bandwidth and with a 47µF low-ESR electrolytic capacitor in parallel with a 0.1µF ceramic capacitor across output

**Efficiency vs. Load**


**RAC04-3.3SC/230**

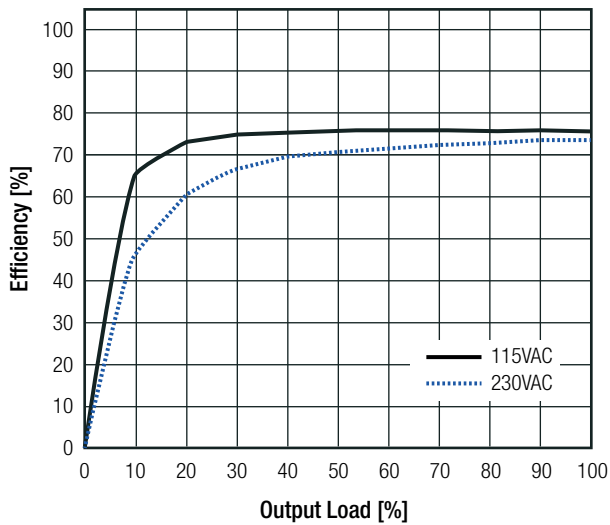


**RAC04-05SC/230**

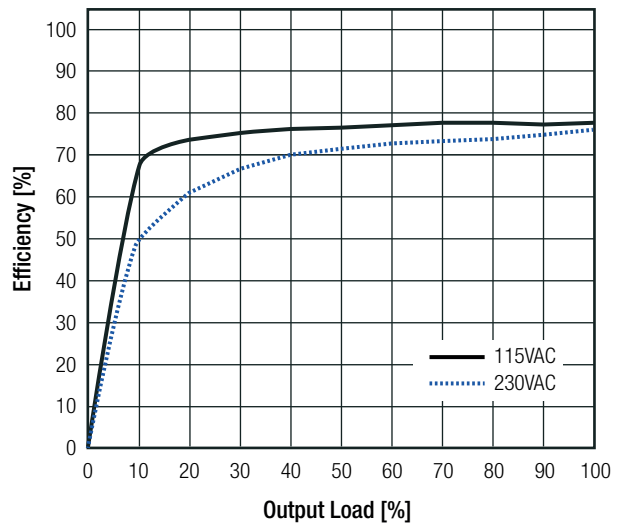

**RAC04-12SC/230**

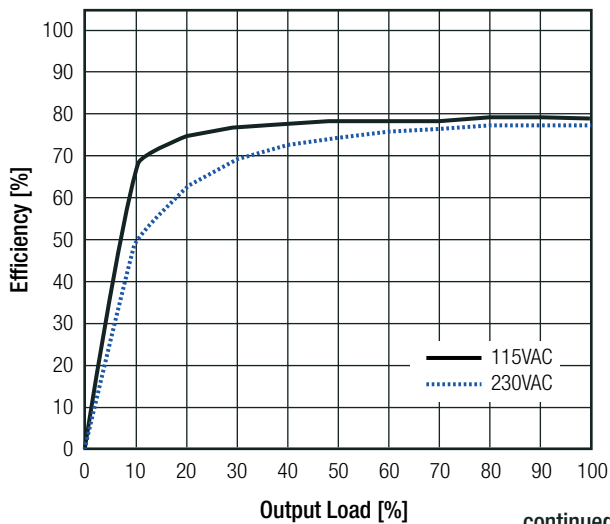


**RAC04-15SC/230**

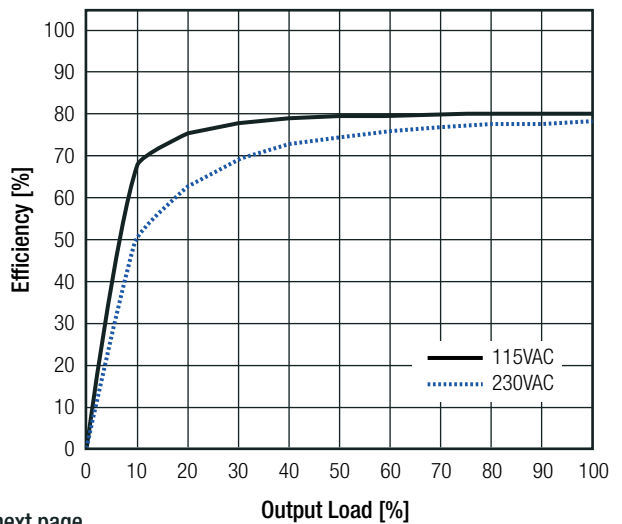

continued on next page

Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)

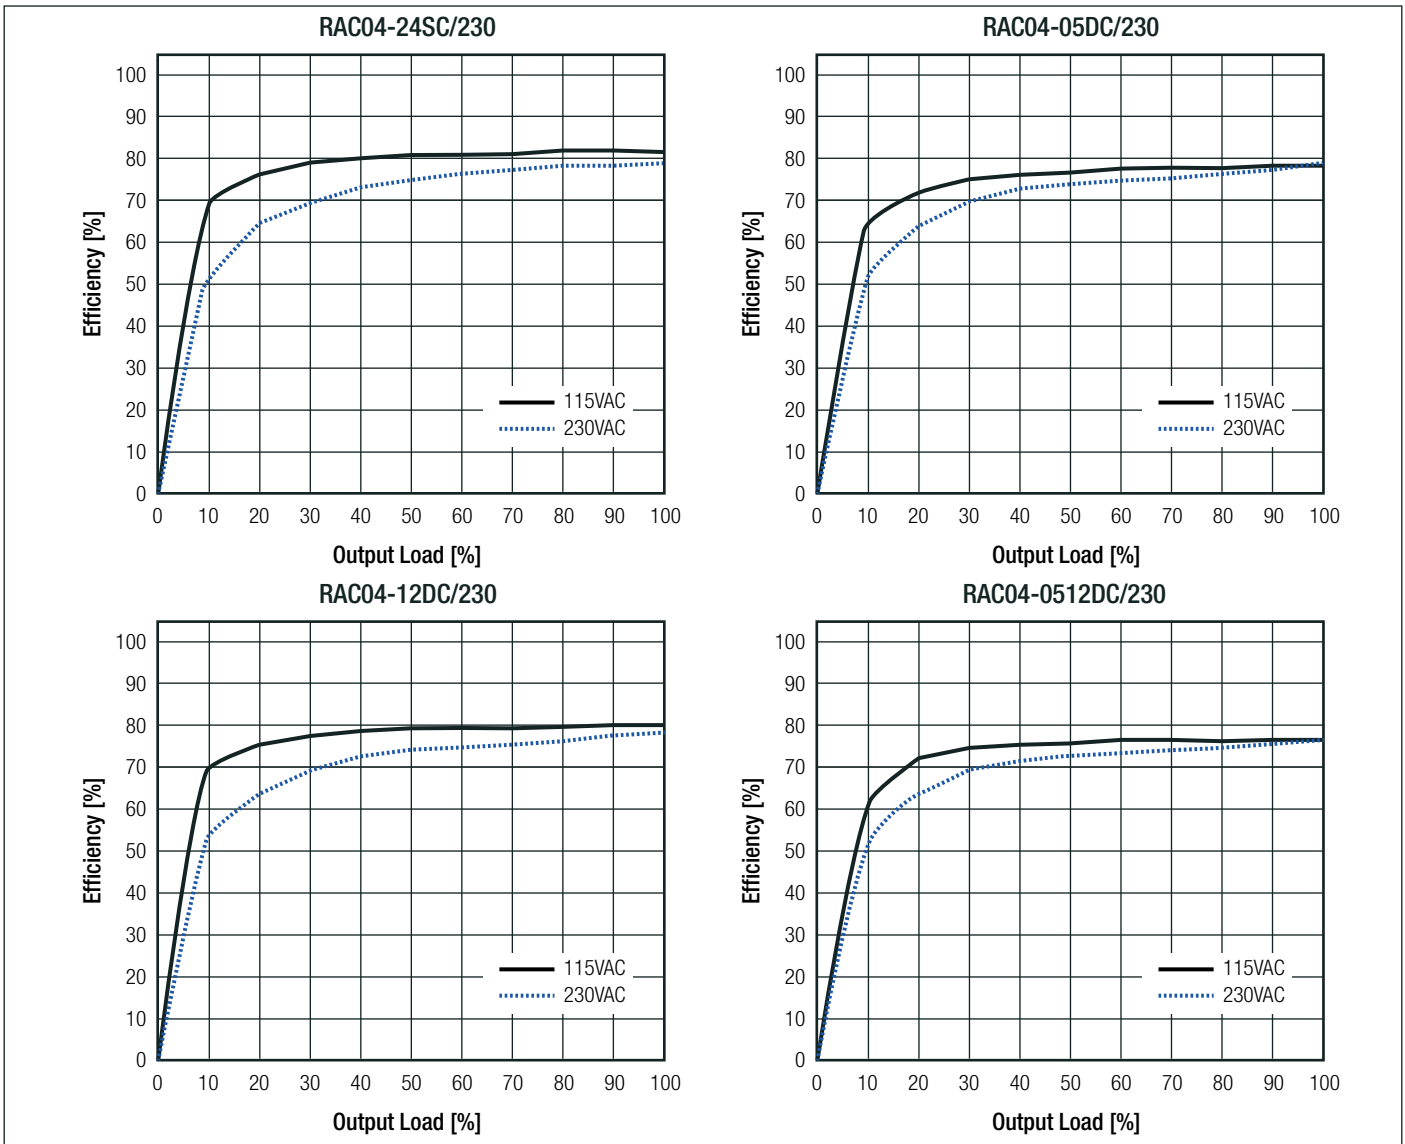

**REGULATIONS**

| Parameter       | Condition                                   |   | Value                                      |
|-----------------|---|---|--|
| Output Accuracy | single and dual<br>5V/12V dual assymetrical |   | ±2.0% typ.<br>±2.0% / ±10.0% typ.          |
| Line Regulation | 90-264VAC                                   | single and dual<br>5V/12V dual assymetrical               | ±0.2% typ.<br>±0.2% / ±1.0% typ.           |
| Load Regulation | 10% to 100% load                            | 3.3V, 5V output<br>all others<br>5V/12V dual assymetrical | 1.0% typ.<br>0.5% typ.<br>1.0% / 5.0% typ. |

**PROTECTIONS**

| Parameter                      | Type          |                     | Value              |
|--------------------------------|---------------|---------------------|--------------------|
| Short Circuit Protection (SCP) |               |                     | automatic recovery |
| Over Voltage Category          |               |                     | OVC II             |
| Isolation Voltage              | I/P to O/P    | tested for 1 minute | 3.75kVAC           |
| Isolation Resistance           |               |                     | 100MΩ min.         |
| Insulation Grade               |               |                     | reinforced         |
| Leakage Current                | 230VAC / 50Hz |                     | 0.25mA max.        |


continued on next page

Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)

**Notes:**

Note4: Refer to local safety regulations if input over-current protection is also required

**Protection Circuit**

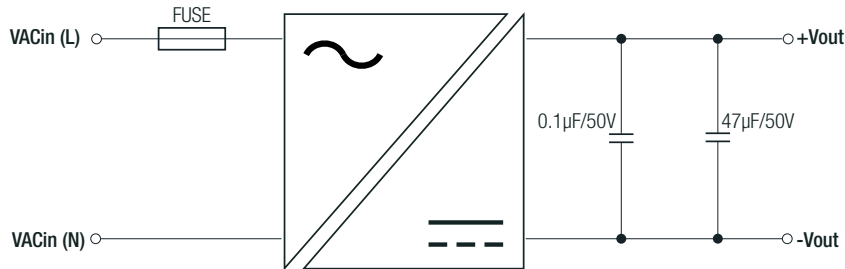


**ENVIRONMENTAL**


| Parameter                   | Condition                        |                         | Value                              |
|-----------------------------|----------------------------------|-------------------------|------------------------------------|
| Operating Temperature Range | @ natural convection 0.1m/s      | full load               | -40°C to +65°C                     |
|                             |                                  | refer to derating graph | -40°C to +80°C                     |
| Operating Altitude          |                                  |                         | 2000m                              |
| Operating Humidity          | non-condensing                   |                         | 95% RH max.                        |
| Pollution Degree            |                                  |                         | PD2                                |
| Vibration                   |                                  |                         | according to MIL-STD-810F standard |
| MTBF                        | according to MIL-HDBK-217F, G.B. | +25°C                   | 500 x 10 <sup>3</sup> hours        |

**Derating Graph**

(@ Chamber and natural convection 0.1m/s)

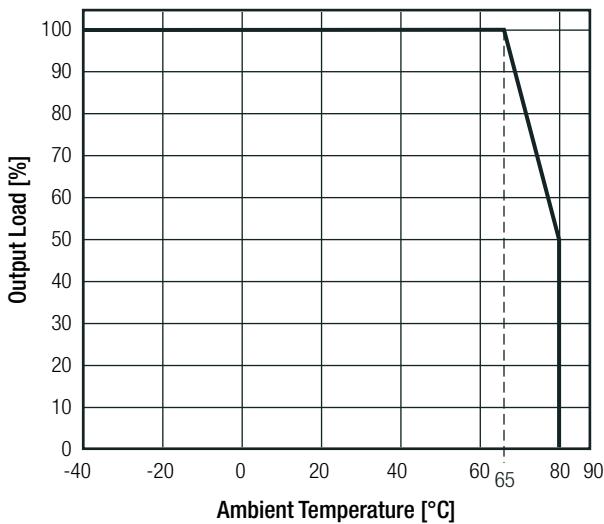

**Line Derating**

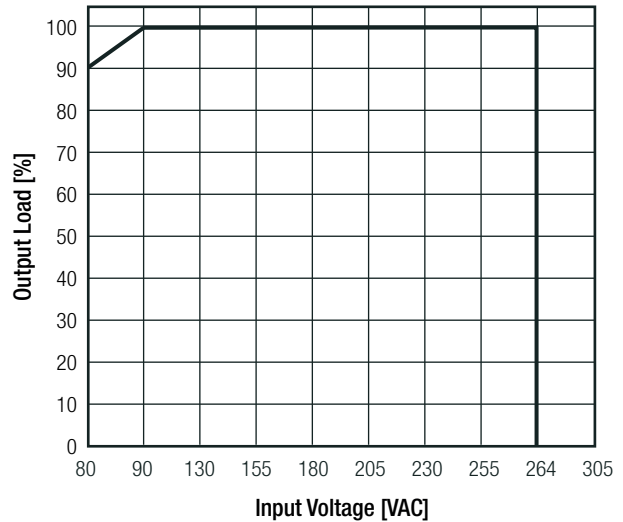

**SAFETY AND CERTIFICATIONS**

| Certificate Type  | Report / File Number | Standard   |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety (CB Scheme)         | 1310055-1-CB-M1      | IEC60950-1:2005, 2nd Edition + A1:2009   |
| Information Technology Equipment, General Requirements for Safety                     | E224736-A21          | UL60950-1, 2nd Edition 2011<br>CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2011 |
| Audio/video, information and communication technology equipment - Safety requirements | AL106051             | EN62368-1:2014<br>IEC62368-1:2014 2nd Edition                                  |
| EAC   | RU-AT.03.67361       | TP TC 004/020, 2011  |
| RoHS2+  |                      | RoHS-2011/65/EU + AM-2015/863  |

continued on next page





**Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)**

| EMC Compliance  | Report / File Number             | Standard / Criterion                    |
|---|----------------------------------|---|
| Electromagnetic compatibility of multimedia equipment - Emission requirements                   | T160225D10-E                     | EN55032, Class B                        |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |                                  | EN55024:2010                            |
| ESD Electrostatic discharge immunity test   | Air: ±2, 4, 8kV<br>Contact: ±4kV | IEC61000-4-2:2008, Criteria A           |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m                             | IEC61000-4-3:2010, Criteria A           |
| Fast Transient and Burst Immunity   | AC Power Port: ±1kV              | IEC61000-4-4:2004 + A1:2010, Criteria A |
| Surge Immunity  | AC Power Port: L-N ±1kV          | IEC61000-4-5:2005, Criteria A           |
| Immunity to conducted disturbances, induced by radio-frequency fields                           | AC Power Port: 3V                | IEC61000-4-6:2008, Criteria A           |
| Power Magnetic Field Immunity   | 50Hz, 1A/m                       | IEC61000-4-8:2009, Criteria A           |
| Voltage Dips and Interruptions  | Voltage Dips: >95%               | IEC61000-4-11:2004, Criteria A          |
|   | Voltage Dips: 30%                | IEC61000-4-11:2004, Criteria A          |
|   | Interruptions: >95%              | IEC61000-4-11:2004, Criteria B          |

**DIMENSION AND PHYSICAL CHARACTERISTICS**

| Parameter         | Type                   | Value   |
|-------------------|------------------------|---|
| Material          | case<br>potting<br>PCB | black plastic (JL94 V-0)<br>silicone (JL94 V-0)<br>FR4 (JL94 V-0) |
| Dimension (LxWxH) |                        | 36.7 x 27.2 x 17.1mm  |
| Weight            |                        | 31.5g typ.  |

**Dimension Drawing (mm)**

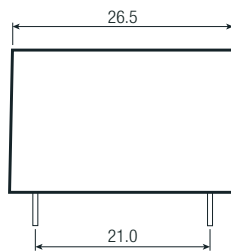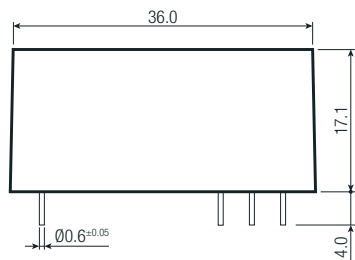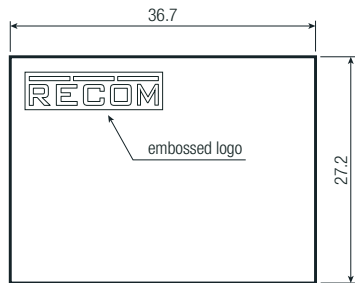



**Pinning information**

| Pin # | Single     | Dual       | Dual (assymetric) |
|-------|------------|------------|-------------------|
| 1     | No Pin     | No Pin     | No Pin            |
| 2     | +Vout      | +Vout      | +5Vout            |
| 3     | -Vout      | Com        | Com               |
| 4     | NC         | -Vout      | +12Vout           |
| 5     | VAC in (L) | VAC in (L) | VAC in (L)        |
| 6     | VAC in (N) | VAC in (N) | VAC in (N)        |
| 7     | NC*        | NC*        | NC*               |

\*Pin 7 is NC but need 4mm minimum clearance to ground for safety

NC= no connection  
Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

**Redommended footprint details**

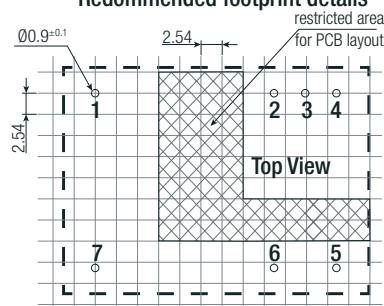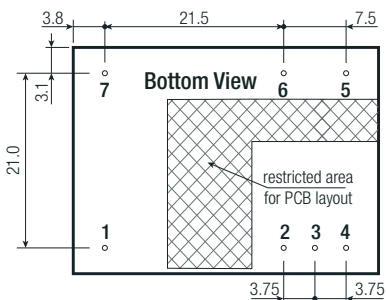

**Specifications** (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)**PACKAGING INFORMATION**

| Parameter                   | Type | Value                 |
|-----------------------------|------|-----------------------|
| Packaging Dimension (LxWxH) | tube | 520.0 x 32.0 x 27.0mm |
| Packaging Quantity          |      | 12pcs                 |
| Storage Temperature Range   |      | -40°C to +100°C       |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [AC/DC Power Modules](#) category:*

*Click to view products by [RECOM POWER](#) manufacturer:*

Other Similar products are found below :

[VI-HAM-CM](#) [ERP-350-12](#) [KPSB25-12-J](#) [KPSB25-15-J](#) [KPSB25-24-J](#) [KPSB25-36-J](#) [KPSB25-5-J](#) [KPSB6-12-J](#) [KPSB6-5-J](#) [TMPS 03-112](#)  
[TMPS 03-115](#) [TMPS 03-124](#) [IRM-03-9S](#) [LFWLT300-CK](#) [TMPS 03-109](#) [TPP 40-112](#) [TPP 65-105](#) [TPP 65-112](#) [VOF-275-48](#) [RAC04-](#)  
[12DC/277-E](#) [RAC04-12SC/277-E](#) [RAC04-05DC/277-E](#) [RAC04-0512DC/277-E](#) [PFE700SA-48/T](#) [MFM-15-12](#) [MFM-15-5](#) [MFM-20-12](#)  
[MPM-05-12](#) [MPM-05-24](#) [MPM-05-5](#) [MPM-10-12](#) [MPM-10-24](#) [MPM-15-24](#) [MPM-15-5](#) [MPM-20-24](#) [MPM-20-5](#) [MPM-30-12](#) [MPM-30-24](#)  
[MPM-30-5](#) [RAC01-05SGA](#) [RAC01-05SGB](#) [RAC01-12SGB](#) [RAC02-05SGA](#) [RAC02-05SGB](#) [RAC02-12SGA](#) [RAC03-05SGA](#) [RAC03-](#)  
[05SGB](#) [RAC03-12SGA](#) [RAC03-3.3SGA](#) [RAC04-15SGB](#)