

!NOT RECOMMENDED FOR NEW DESIGNS!
(LAST TIME BUY: 30TH OCT 2020)

RECOM
AC/DC Converter

Features

- 60 Watt PCB mount package
- Universal input voltage range
- 4kVAC isolation
- Low output ripple and noise
- Short circuit protected
- Output trim
- UL certified, CE marked

Regulated Converter

RAC60-B

**60 Watt
Single
Output**



Description

Power module for PCB mounting. This switching converter has a universal input voltage range with single outputs which are trimmable to compensate for any voltage drops on the output connections. Threaded inserts ensure mechanical fixing.



Selection Guide

Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	Max. Capacitive Load [μF]	Output Power max. [W]
RAC60-05SB	85 - 265	5	10000	82	80000	50
RAC60-09SB	85 - 265	9	6600	84	28000	60
RAC60-12SB	85 - 265	12	5000	86	14000	60
RAC60-15SB	85 - 265	15	4000	86	12000	60
RAC60-24SB	85 - 265	24	2500	86	4000	60
RAC60-48SB	85 - 265	48	1250	86	950	60



Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient



Model Numbering



Ordering Examples:

RAC60-05SB	60 Watt	5Vout	Single Output
RAC60-24SB	60 Watt	24Vout	Single Output

UL60950-1 certified
 EN60950-1 certified
 CAN/CSA-C22.2 No. 60950-1 certified
 EN55032 compliant
 EN55024 compliant

PREFERRED ALTERNATIVES
Please consider these alternatives:

RACM60-K/OF Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range ⁽²⁾	nom. Vin = 230VAC	85VAC 100VDC	230VAC	265VAC 370VDC
Input Current	115VAC 230VAC			2A 1A
Inrush Current	2ms max., cold start	115VAC 230VAC		30A 50A
No load Power Consumption	115VAC/230VAC			520mW
Input Frequency Range	AC Input	47Hz		63Hz
Output Voltage Trimming	please refer to Trim table	-10%		+10%
Minimum Load		1%		
Hold-up Time	115VAC/230VAC	10ms		
Internal Operating Frequency			100kHz	
Output Ripple and Noise ⁽³⁾	20MHz limited			<0.5% Vout + 50mVp-p <0.2% Vout + 40mVp-p

Notes:

- Note2: The products were submitted for safety files at AC-Input operation
 Note3: Measurements are made with a 0.1µF and 47µF MLCC in parallel across output (low ESR)

Output Voltage Trimming

It allows the user to increase or decrease the output voltage of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Vout or -Vout pins. With an external resistor between the Trim and -Vout pin, the output voltage increases. With an external resistor between the Trim and +Vout pin, the output voltage decreases. The values for trim resistors shown in trim tables below, the specified percentage may slightly vary.

	5Vout		9Vout		12Vout		15Vout		24Vout		48Vout		
Trim up	+10	100	+10	100	+10	100	+10	100	+10	100	+10	100	[%]
R _{up} =	500	1M	6k	1M	4k	1M	5k	1M	12k	1M	12k	1M	[Ω]

	5Vout		9Vout		12Vout		15Vout		24Vout		48Vout		
Trim down	100	-10	100	-10	100	-10	100	-10	100	-10	100	-10	[%]
R _{down} =	1M	500	1M	20k	1M	40k	1M	60k	1M	110k	10M	290k	[Ω]

REGULATIONS

Parameter	Condition	Value
Output Accuracy		±2.0% max.
Line Regulation	low line to high line, full load	±1.0% typ.
Load Regulation ⁽⁴⁾	5% to 100% load	1.0% typ.

Notes:

- Note4: Operation below 5% load will not harm the converter, but specifications may not be met

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)


PROTECTIONS			
Parameter	Type		Value
Short Circuit Protection (SCP)			continuous, hiccup, auto recovery
Over Voltage Protection (OVP)			zener diode clamp
Over Current Protection (OCP)			auto recovery
Over Voltage Category			OVCII
Isolation Voltage	I/P to O/P	tested for 1 minute	4kVAC
Isolation Resistance			100MΩ max.
Leakage Current			0.5mA max.

Notes:

Note5: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type

Note6: An external MOV is recommended. The varistor should comply with IEC-61051-2. e.g. 14S471K series


Protection Circuit

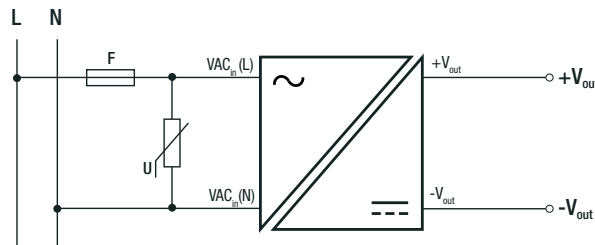

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	@ natural convection 0.1m/s	full load	5, 9Vout 12, 15Vout 24, 48Vout
		refer to derating graph	
			-30°C to +45°C -30°C to +50°C -30°C to +55°C -40°C to +70°C
Temperature Coefficient			0.02%/K typ.
Operating Altitude			2000m
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	>300 x 10 ³ hours

Derating Graph

(@ Chamber and natural convection 0.1m/s)

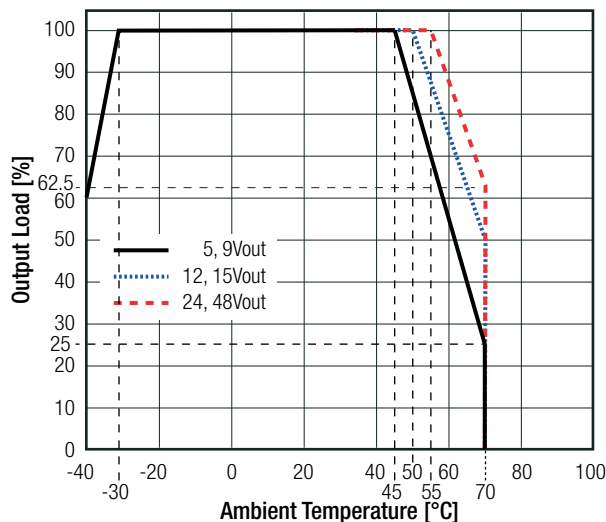



Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E196683	UL60950-1, 2nd Edition, 2007 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2007
Information Technology Equipment, General Requirements for Safety		EN60950-1:2006 + A2:2013
EAC Safety of Low Voltage Equipment	RU-AT.49.09571	TP TC 004/2011
RoHS2+		RoHS-2011/65/EU + AM-2015/863
EMC Compliance		
Condition	Standard / Criterion	
Electromagnetic compatibility of multimedia equipment – Emission Requirements	EN55032:2015	
Information technology equipment - Immunity characteristics - Limits and methods of measurement	EN55024:2010 + A1:2015	
Limitation of voltage fluctuations/flicker in low-voltage systems	EN61000-3-3: 2013	

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case	epoxy with fibreglas, (UL94V-0)
Dimension (LxWxH)		109.0 x 58.5 x 30.0mm
Weight		310g typ.


Dimension Drawing (mm)

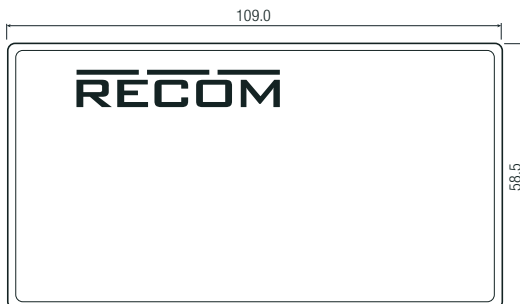



Pinning information

Pin #	Single	Dia. (mm)
1	FG	1.2
2	VAC in (L)	1.8
3	VAC in (N)	1.8
4	Trim	1.2
5	-VDC out	1.8
6	+VDC out	1.8

FC = Fixing Centers
Tolerance: xx.x ± 0.5mm
 xx.xx ± 0.25mm



Recommended Footprint Details

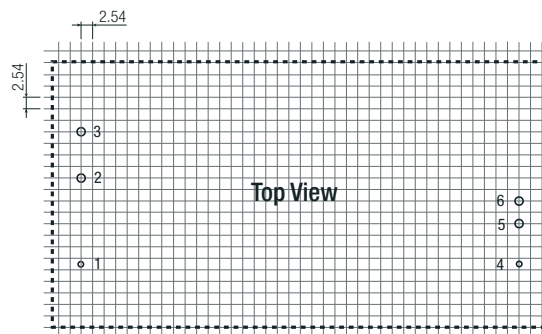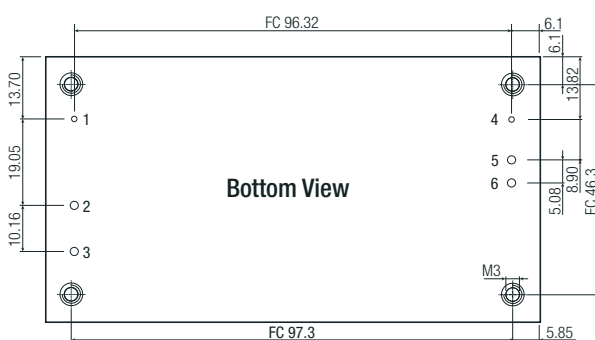

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	cardboard box	120.0 x 65.0 x 55.0mm
Packaging Quantity		1pcs
Storage Temperature Range		-50°C to +85°C
Storage Humidity	non-condensing	95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Recom Power](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)