

Features

- 1:1 input range
- Low cost 1W converter
- Efficiency up to 76%
- -40°C to +85°C operating temperature range
- EN/IEC/UL60950-1 certified

Unregulated Converters



RBE

**1 Watt
SIP7
Single Output**



Description


The RBE-0505S is a low cost 1W DC/DC converters in a standard SIP7 footprint. This makes it suitable for price sensitive industrial, test and measurement and high volume applications. The RBE converter is pin-compatible with the RB converter series, but offers only the most popular 0505 voltage combination, offering a simple way to cost-down an existing application. The RBE is fully certified to EN/IEC/UL/CSA/EAC and comes with a 3 year warranty.

Selection Guide


Part Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency ⁽¹⁾ max. [%]
RBE-0505S	5	5	200	76

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

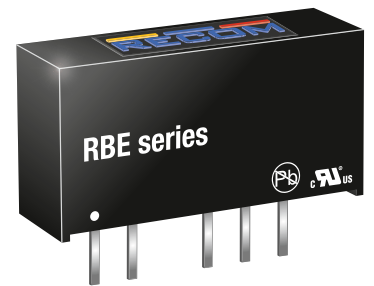

Model Numbering

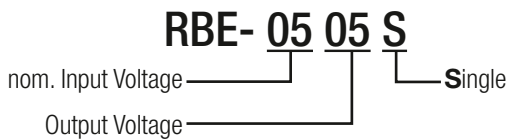

Ordering Examples:

RBE-0505S: 5VDC Input Voltage, 5VDC Output Voltage, Single Output



UL60950-1 certified
CAN/CSA-C22.2 No 60950-1 certified
EN60950-1 certified
IEC60950-1 certified

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)


BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Minimum Load ⁽²⁾		0%		
Internal Operating Frequency		50kHz	82kHz	105kHz
Output Ripple and Noise	20MHz BW		52mVp-p	100mVp-p

Notes:

Note2: Operation below 10% load will not harm the converter, but specifications may not be met


Efficiency vs. Load

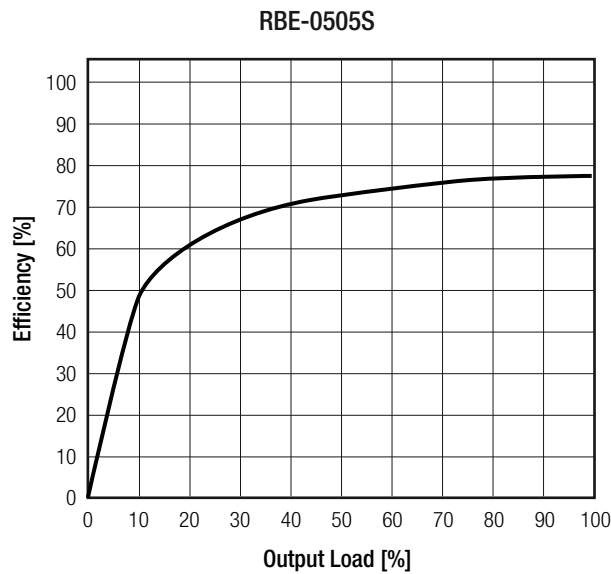

REGULATIONS

Parameter	Condition	Value
Output Accuracy		-2% typ. / ±5.0% max.
Line Regulation	low line to high line	±1.2% typ.
Load Regulation	20% to 100% load	10.0% typ.


Tolerance Envelope

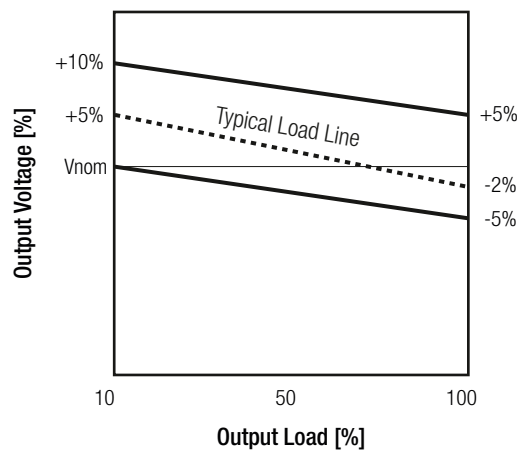

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

Deviation vs. Load

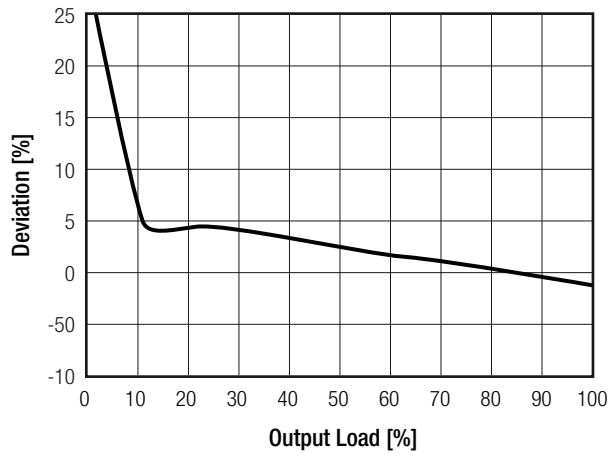

PROTECTIONS

Parameter	Type		Value
Short Circuit Protection (SCP)			1 second
Isolation Voltage ⁽³⁾	I/P to O/P	tested for 1 second rated for 1 minute	1kVDC 500VAC
Isolation Resistance			1GΩ min.
Isolation Capacitance			75pF max.
Insulation Grade			basic

Notes:

Note3: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note4: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T1A slow blow type


ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	full load (see graph)		-40°C to + 85°C
Operating Altitude			2000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +85°C	2400 x 10 ³ hours 650 x 10 ³ hours

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

Derating Graph

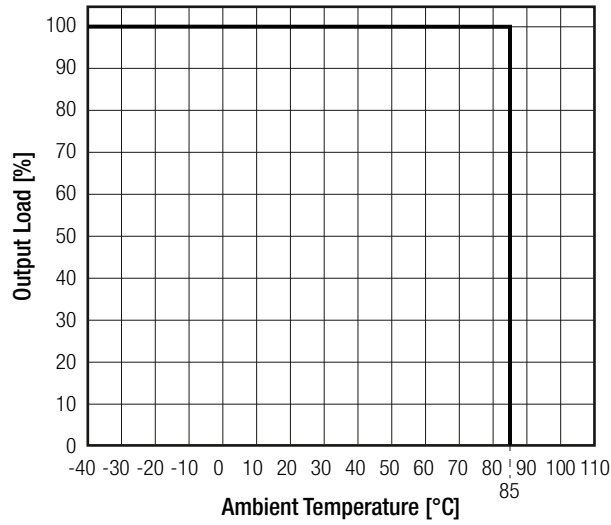

SAFETY AND CERTIFICATIONS


Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
Information Technology Equipment, General Requirements for Safety	E358085-A4-UL	UL60950-1, 2nd Edition:2007 CAN/CSA C22.2 No. 60950-1-03, 2nd Edition:2007
EAC	RU-AT.49.09571	TP TC 004/2011
RoHs 2+		RoHS-2011/65/EU + AM-2015/863

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		19.6 x 6.0 x 10.2mm
Weight		2.2g typ.

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up otherwise stated)

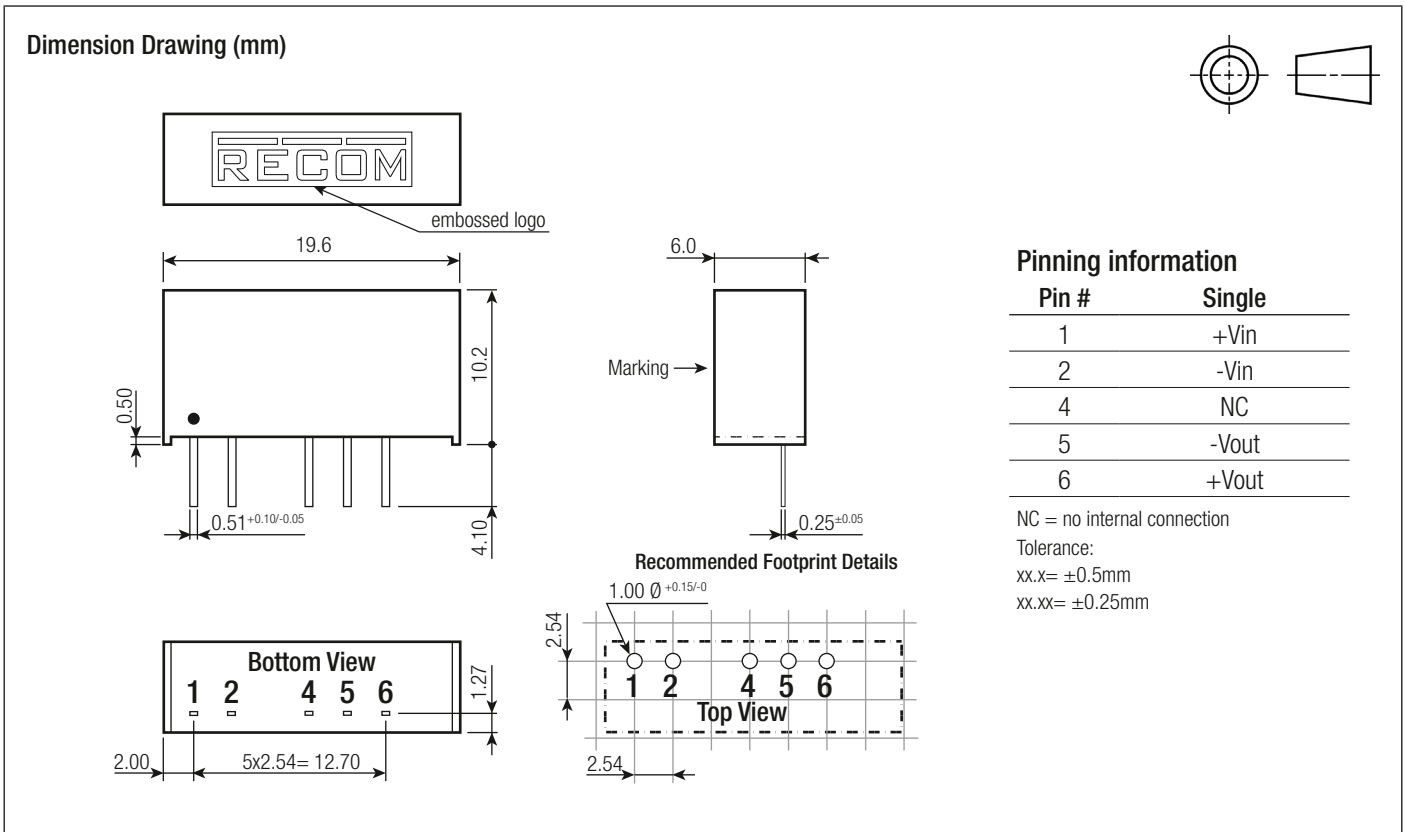

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 16.0 x 9.0mm
Packaging Quantity	tube	25pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [RECOM POWER](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)