

Features

Regulated Converters

- 15W in 2" x 1" Package
- 2kVDC And 3kVDC Isolation Options
- 2:1 or 4:1 Input Voltage Range
- Continuous Short Circuit Protection (Power Limiting)
- Full SMD Internal Design
- Synchronous Rectification On 3.4V & 5.1V Outputs
- CTRL Pin Option

Description

The REC15-xxxxS_D/M -series offer single and dual regulated outputs in a 2"x1" package with 2kVDC or 3kVDC isolation options and are suitable for higher power industrial applications. Remote on/off control is standard. The converters can deliver 150% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents. The outputs with 3A load current have raised output voltages to compensate for track losses as standard.


Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. ⁽¹⁾ [%] | max. Capacitive Load [μ F] |
|---------------|---------------------------|----------------------|---------------------|------------------------------------|---------------------------------|
| REC15-xx3.4S | 9-18, 18-36, 36-75 | 3.4 | 3000 | 84-85 | 3300 |
| REC15-xx5.1S | 9-18, 18-36, 36-75 | 5.1 | 3000 | 86-87 | 3300 |
| REC15-xx12S | 9-18, 18-36, 36-75 | 12 | 1250 | 85-86 | 3300 |
| REC15-xx15S | 9-18, 18-36, 36-75 | 15 | 1000 | 85-86 | 3300 |
| REC15-xx05D | 9-18, 18-36, 36-75 | \pm 5 | \pm 1500 | 82-83 | \pm 1500 |
| REC15-xx12D | 9-18, 18-36, 36-75 | \pm 12 | \pm 625 | 85-86 | \pm 1000 |
| REC15-xx15D | 9-18, 18-36, 36-75 | \pm 15 | \pm 500 | 85-86 | \pm 1000 |
| REC15-xx3.4SZ | 9-36, 18-75 | 3.4 | 3000 | 84-85 | 3300 |
| REC15-xx5.1SZ | 9-36, 18-75 | 5.1 | 3000 | 87 | 3300 |
| REC15-xx12SZ | 9-36, 18-75 | 12 | 1250 | 86 | 3300 |
| REC15-xx15SZ | 9-36, 18-75 | 15 | 1000 | 86 | 3300 |
| REC15-xx05DZ | 9-36, 18-75 | \pm 5 | \pm 1500 | 83 | \pm 1500 |
| REC15-xx12DZ | 9-36, 18-75 | \pm 12 | \pm 625 | 86 | \pm 1000 |
| REC15-xx15DZ | 9-36, 18-75 | \pm 15 | \pm 500 | 86 | \pm 1000 |

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient.

Model Numbering

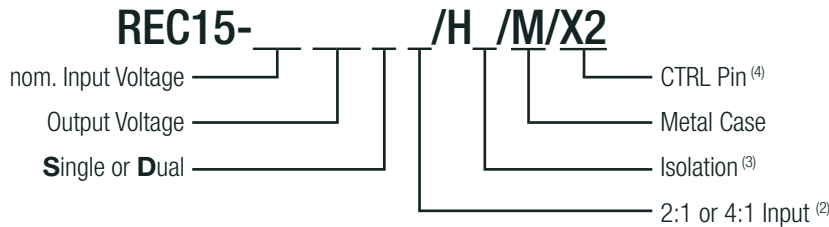

Notes:

Note2: add „Z“ for 4:1 Input Voltage (24= 9-36VDC or 48= 18-75VDC)

Note3: „/H2“ = 2kVDC isolation

„/H3“ = 3kVDC isolation

Note4: without suffix, standard Pinning with CTRL Pin
with suffix „/X2“, without CTRL Pin

Ordering Examples:

| | | | | | | |
|----------------------|----------|--------------|---------------|-----------|-----------------|------------------|
| REC15-125.1S/H3/M | 9-18Vin | 5.1Vout | Single output | 2:1 input | 3kVDC isolation | with CTRL Pin |
| REC15-2412DZ/H2/M/X2 | 9-36Vin | \pm 12Vout | Dual output | 4:1 input | 2kVDC isolation | without CTRL Pin |
| REC15-2412S/H3/M | 18-36Vin | 12Vout | Single Output | 2:1 input | 3kVDC isolation | with CTRL Pin |
| REC15-4815DZ/H2/M | 18-75Vin | \pm 15Vout | Dual Output | 4:1 input | 2kVDC isolation | with CTRL Pin |
| REC15-2405SZ/H2/M/X2 | 18-36 | 24Vout | Single Output | 2:1 input | 2kVDC isolation | without CTRL Pin |

RECOM
DC/DC Converter

REC15-S_D(Z)/M

15 Watt
2" x 1"



**Metal Case
Single and Dual**



IEC60950-1 + AM2 Certified
EN60950-1 + AM2 Certified
UL60950-1 Certified
IEC/EN60601-1 Certified
CB Report

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)



BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|--|--|------------------------|--------------------|---|
| Internal Input Filter | | | | Pi Network |
| Input Voltage Range | 2:1 Input Voltage = 12VDC 24VDC 48VDC | 9VDC 18VDC 36VDC | | 18VDC 36VDC 75VDC |
| | 4:1 Input Voltage = 24VDC 48VDC | 9VDC 18VDC | | 36VDC 75VDC |
| Input Surge Voltage | 100ms max. nom. Input Voltage | | | 36VDC 50VDC 100VDC |
| Under Voltage Lockout (UVLO) | nom. Vin= 12VDC (2:1 and 4:1 Input Types) | DC-DC ON DC-DC OFF | 8.3VDC 7.9VDC | |
| | nom. Vin= 24VDC (2:1 and 4:1 Input Types) | DC-DC ON DC-DC OFF | 17.4VDC 16.7VDC | |
| | nom. Vin= 48VDC | DC-DC ON DC-DC OFF | 35.7VDC 34.3VDC | |
| Input Current | 2:1 Input Voltage = 9-18VDC 18-36VDC 36-75VDC | | 2A 1A 0.5A | |
| | 4:1 Input Voltage = 9-36VDC 18-75VDC | | 2A 1A | |
| Quiescent Current | | | | 20mA |
| Minimum Load | | | 0% | |
| Start-up time | | | 25ms | |
| Rise Time | | | 200 μ s | |
| Hold-up Time | | | 200 μ s | |
| ON/OFF CTRL | DC-DC ON DC-DC OFF | | | Open or $3.5\text{V} < V_r < 12\text{V}$ $0\text{V} < V_r < 1.2\text{V}$ |
| Internal Operating Frequency | | | 300kHz | |
| Output Ripple and Noise ⁽⁴⁾ | 20MHz BW | | | 100mVp-p |

Notes:

Note4: Measurements are made with a 100nF MLCC across output. (low ESR)



Efficiency vs. Load

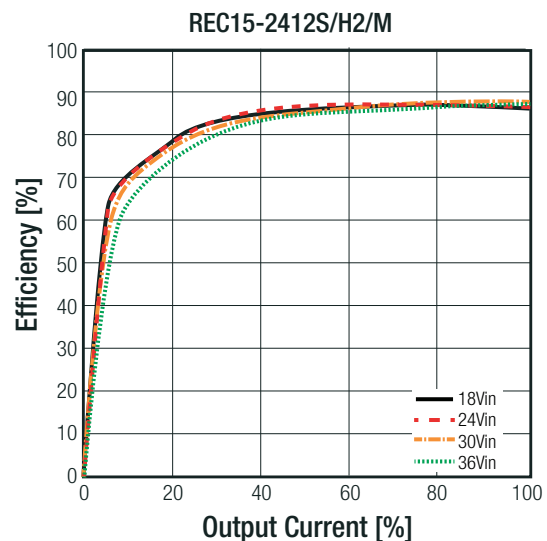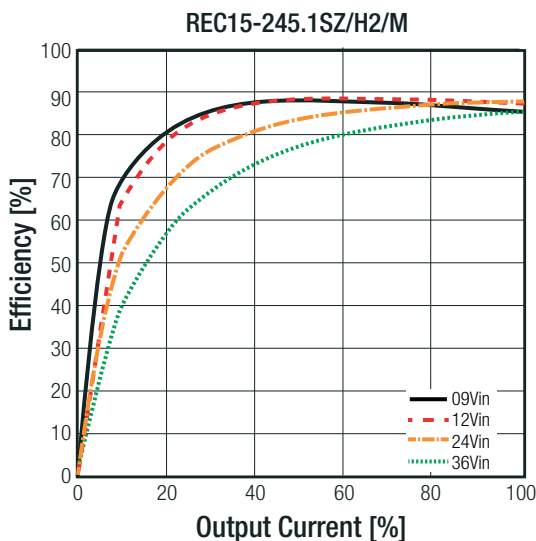

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)

Efficiency vs. Load


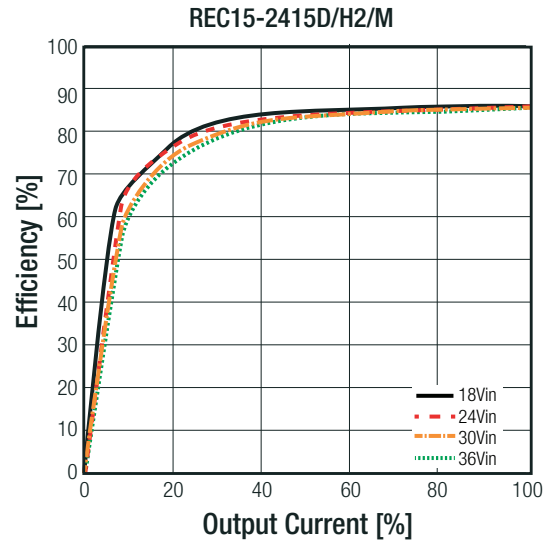
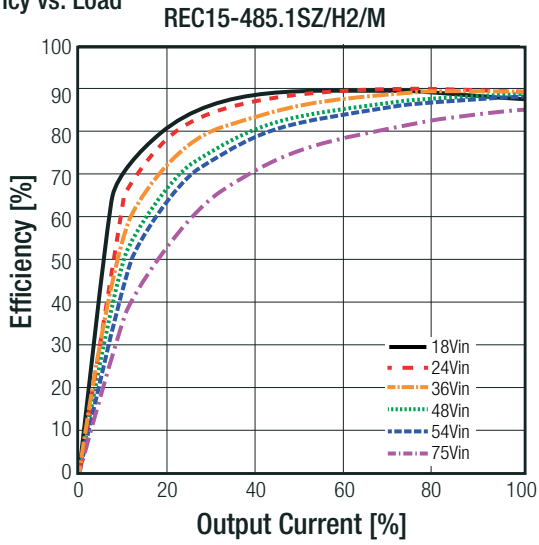


REGULATIONS

| Parameter | Condition | | Value |
|------------------|------------------|------------------|------------|
| Output Accuracy | 3.4Vout | | ±1.2% max. |
| | all other | | ±1.0% max. |
| Line Regulation | | | ±0.3% max. |
| Load Regulation | 25% to 100% load | Single | ±0.5% max. |
| | | Dual | ±1.2% max. |
| Cross Regulation | dual output only | 25% to 100% load | ±5.0% max. |

Accuracy vs. Load

(@ min Vin to max. Vin)

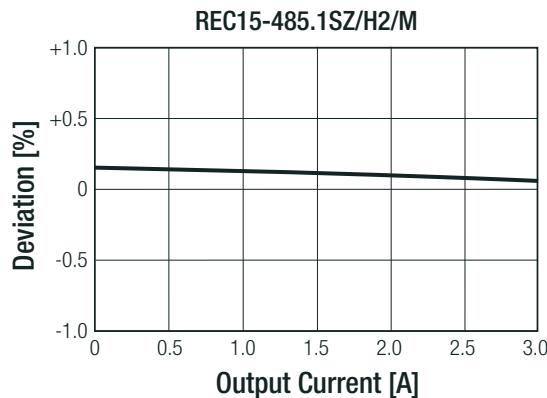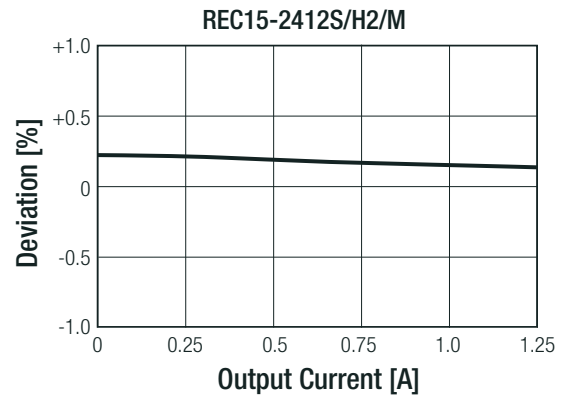
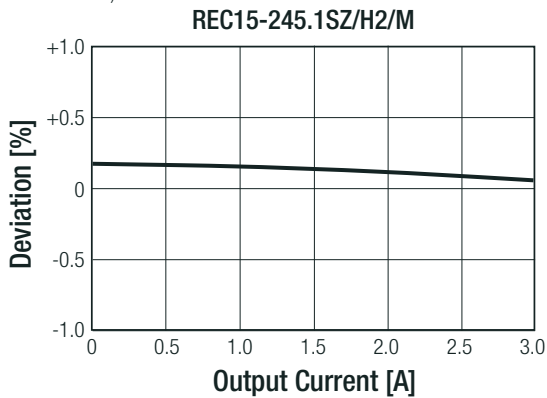


continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)

Accuracy vs. Load
(@ min V_{in} to max. V_{in})

REC15-2415DZ/H2/M

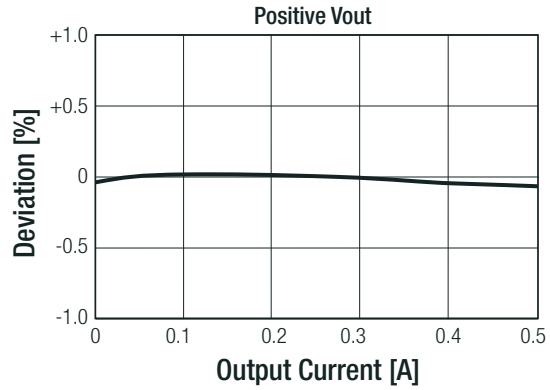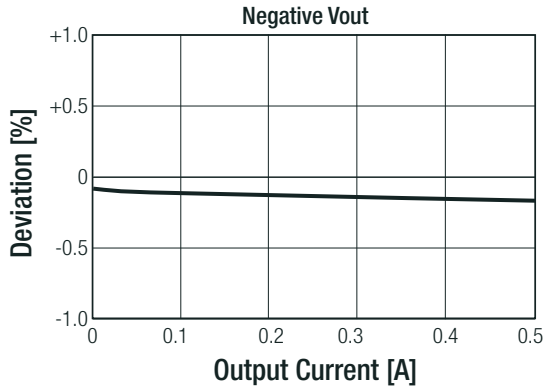

PROTECTIONS

| Parameter | Type | Value | |
|----------------------------------|--------------|---------------------------|---------|
| Short Circuit Protection (SCP) | below 100mΩ | continuous, auto recovery | |
| Over Load Protection (OLP) | | 150% typ., Hiccup mode | |
| Isolation Voltage ⁽⁷⁾ | /H2 versions | tested for 1 second | 2kVDC |
| | | rated for 1 minute | 1kVAC |
| | /H3 versions | tested for 1 second | 3kVDC |
| | | rated for 1 minute | 1.5kVAC |
| Isolation Resistance | | 1GΩ min. | |
| Isolation Capacitance | | 1200pF max. | |
| Insulation Grade | | basic | |
| Means of Protection | | none | |
| Leakage Current | | 2μA typ. | |
| Internal and External | Clearance | ≥ 3.4mm | |
| | Creepage | ≥ 3.4mm | |

Notes:

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage.


Note8: An input fuse is required if the mains supply is not over-current protected. Recommended fuse: T4A slow blow type

ENVIRONMENTAL

| Parameter | Condition | | Value |
|-----------------------------|----------------------------------|-----------|------------------------------------|
| Operating Temperature Range | with derating (see graph) | 2:1 Input | -40°C to +100°C |
| | | 4:1 Input | -40°C to +90°C |
| Maximum Case Temperature | | | +100°C |
| Thermal Impedance | 0.1 m/s (natural convection) | | 12°C/W |
| Temperature Coefficient | | | ±0.05% max. |
| Temperature Coefficient | | | ±0.05% max. |
| Operating Altitude | | | 2000m max. |
| Operating Humidity | non-condensing | | 95% RH max. |
| Pollution Degree | | | PD2 |
| Vibration | | | 10-55Hz, 2G, 30min along X,Y and Z |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 700 x 10 ³ hours |
| | | +71°C | 150 x 10 ³ hours |

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)

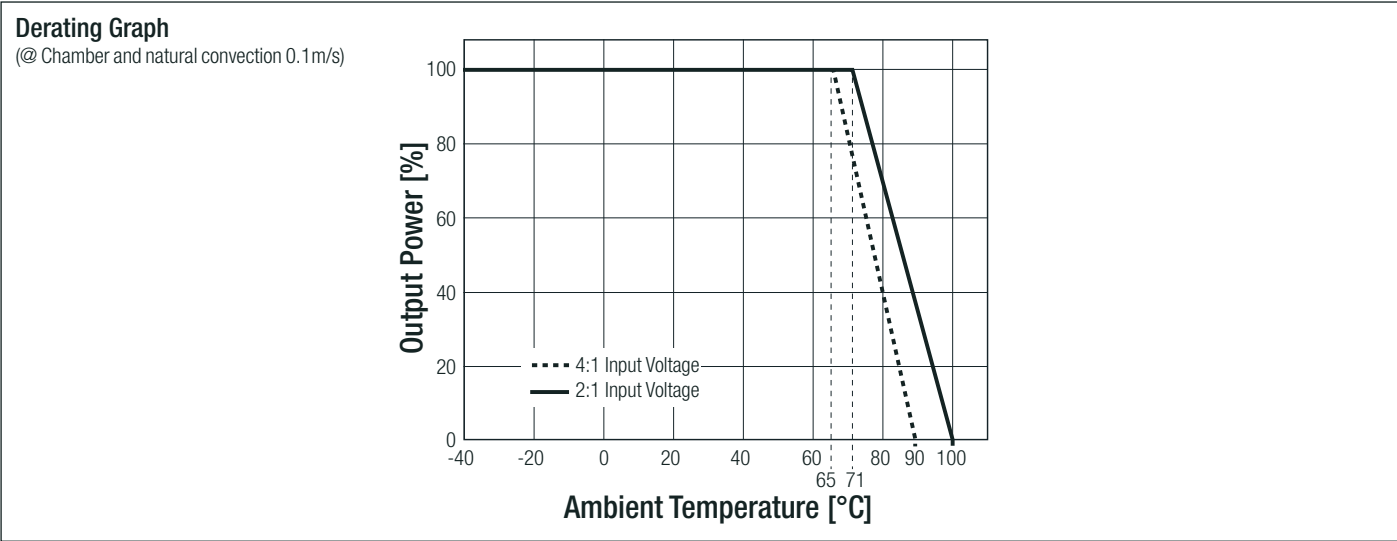


SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|--|----------------------|---|
| Information Technology Equipment, General Requirements for Safety (LVD) | E224736-A19 | UL60950-1, 2nd Edition, 2007 CAN/CSA-C22.2 No. 60950-1-03, 2nd Edition, 2007 |
| Information Technology Equipment, General Requirements for Safety (CB Scheme) | 1310058-1 | IEC60950-1:2005, 2nd Edition + 2009 EN60950-1, 2nd Edition, 2011 |
| Information Technology Equipment, General Requirements for Safety (LVD) | LVD1605077-01 | IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013 |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance | MDD12060585 | IEC60601-1, 3rd Edition, 2007 EN60601-1, 2006 |
| Risk Management | RM12060585 | ISO14971:2007 |
| RoHs2 | | RoHS 6/6, 2011/65/EU + AM-2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|--|----------------------|----------------------|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement | with external filter | EN55022, Class B |

EMC Filtering Suggestions for EN55022 Class B

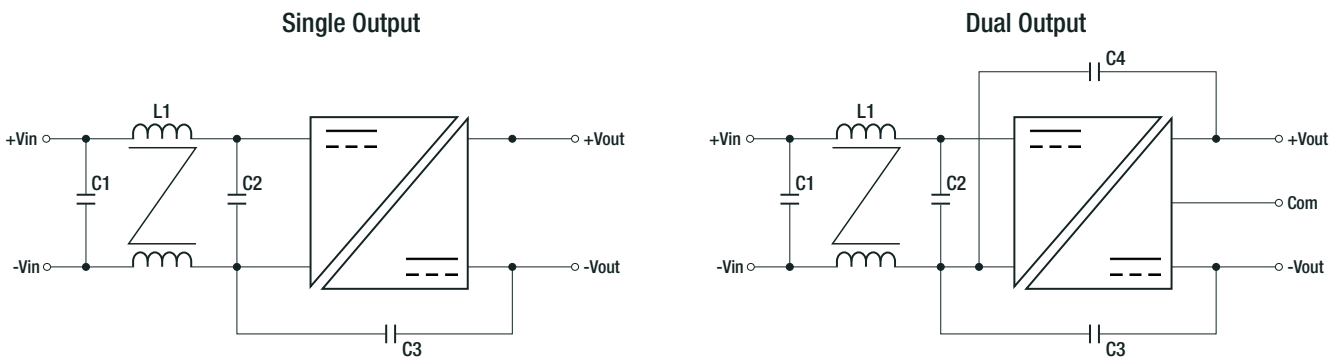


| according to EN55022 Class B | | | | | |
|------------------------------|-------|----|-------|----|------------------------------|
| Vin | C1 | C2 | C3 | C4 | L1 |
| 12VDC | 10µF | | 3.3nF | | CMC, 1200µH WE 7446723001 |
| 24VDC | 4.7µF | | | | |
| 48VDC | 2.2µF | | | | |

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm up unless otherwise specified)

DIMENSION and PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|---------------------------|---------|---------------------------------|
| Material | Case | nickel plated metal, (UL94 V-2) |
| | PCB | FR4 (UL94-V-1) |
| | Potting | epoxy (UL94 V-0) |
| Package Dimension (LxWxH) | | 50.8 x 25.4 x 10.2mm |
| Package Weight | | 27g typ. |



Dimension Drawing DIP24 metal case (mm)





Pin Connection

| Pin # | Single | Dual | Single /X2 | Dual /X2 |
|-------|--------|-------|------------|----------|
| 1 | +Vin | +Vin | +Vin | +Vin |
| 2 | -Vin | -Vin | -Vin | -Vin |
| 3 | +Vout | +Vout | +Vout | +Vout |
| 4 | No Pin | Com | No Pin | Com |
| 5 | -Vout | -Vout | -Vout | -Vout |
| 6 | CTRL | CTRL | No Pin | No Pin |

Tolerance: xx.x= $\pm 0.5\text{mm}$
xx.xx= $\pm 0.35\text{mm}$

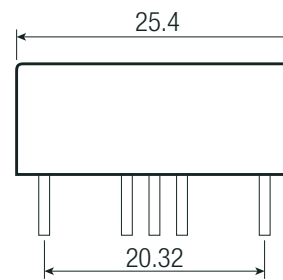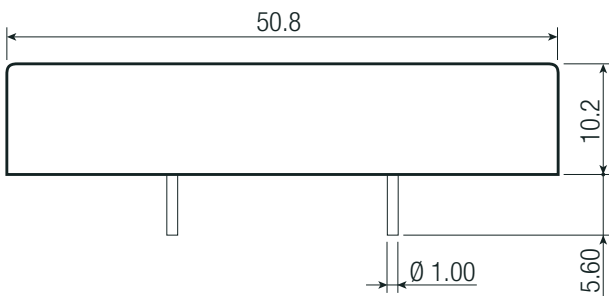

Recommended Footprint Details

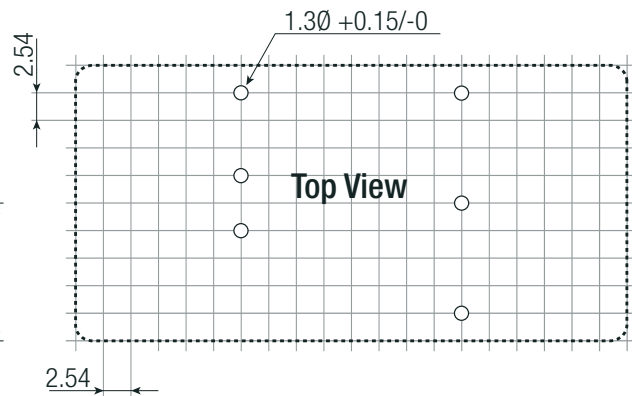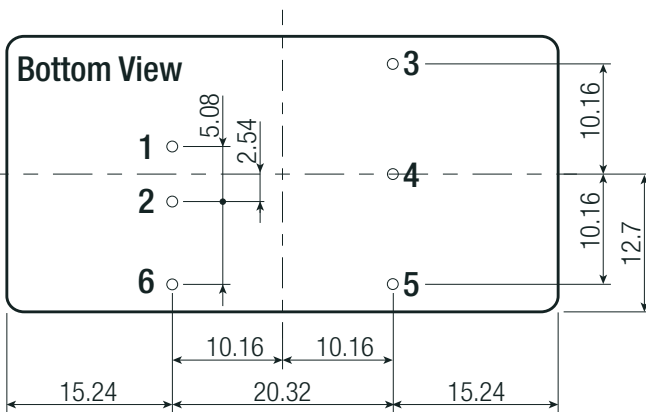

PACKAGING INFORMATION

| | | |
|-----------------------------|------|---|
| Packaging Dimension (LxWxH) | tube | 276.0 x 54.5 x 21.0mm |
| Packaging Quantity | | 10pcs |
| Storage Temperature Range | | -55°C to $+105^\circ\text{C}$ |
| Storage Humidity | | 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Recom Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)