

## Features

- 1:1 input range
- 0.25W SIP4 package
- Efficiency up to 82%
- 1kVDC and 2kVDC/1s basic isolation
- Operating temperature from -40°C to +100°C
- Optional continuous short circuit protection

## Unregulated Converters

## RM/E

0.25 Watt  
SIP4  
Single Output



### Description


The RM/E series DC/DC converter has been designed to offer exceptionally high efficiency, low quiescent current and an extended operating temperature range. Uses include battery powered supplies, high efficiency designs or high temperature applications.

### Selection Guide

Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. <sup>(1)</sup> [%]	max. Capacitive Load <sup>(2)</sup> [μF]
RM-3.305S/E <sup>(3)</sup>	3.3	5	50	80	1000
RM-0505S/E <sup>(3)</sup>	5	5	50	82	1000
RM-1205S/E <sup>(3)</sup>	12	5	50	78	1000

#### Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient  
 Note2: Max Cap Load is tested at nominal input and full resistive load and is defined as the capacitive load that will allow start up in under 1s without damage to the converter



### Model Numbering



#### Notes:

- Note3: standard part is with 1kVDC isolation  
 add suffix „/H“ for 2kVDC isolation

#### Ordering Examples:

- RM-0505S/E: 5V Input Voltage, 5V Output Voltage, Single Output  
 RM-1205S/EH: 12V Input Voltage, 5V Output Voltage, Single Output with 2kVDC Isolation



UL60950-1 certified  
 CAN/CSA-C22.2 No. 60950-1-03 certified  
 IEC60950-1 certified  
 EN60950-1 certified

**PREFERRED ALTERNATIVES**  
 Please consider these alternatives:


**RM Series**

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

**BASIC CHARACTERISTICS**

Parameter	Condition		Min.	Typ.	Max.
Input Voltage Range				±10%	
Minimum Load			0%		
Internal Operating Frequency			20kHz		70kHz
Output Ripple and Noise	20MHz BW	RM-3.305S/E others	35mVp-p		60mVp-p 50mVp-p

**Efficiency vs. Load**

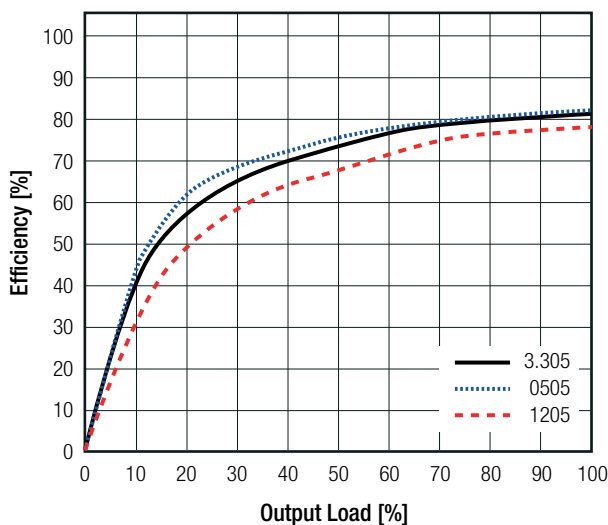


**REGULATIONS**

Parameter	Condition	Value
Output Accuracy		-2.0% typ. / ±5.0% max.
Line Regulation	low line to high line	±1.2% of 1.0% Vin typ.
Load Regulation <sup>(4)</sup>	10% to 100% load	4.0% typ. / 10.0% max.

**Notes:**

Note4: Operation below 10% load will not harm the converter, but specifications may not be met

**Deviation vs. Load**

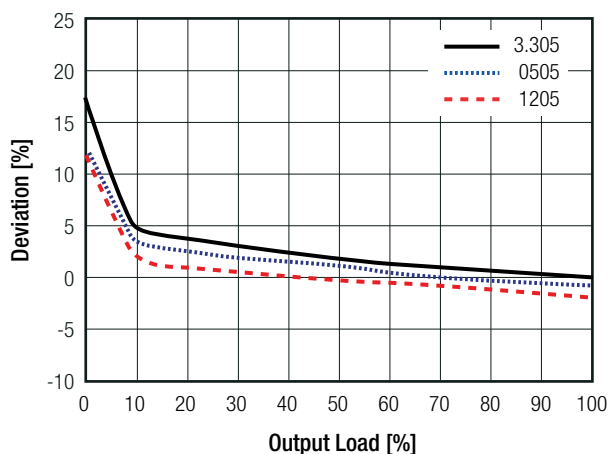


**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

PROTECTIONS			
Parameter	Type		Value
Short Circuit Protection (SCP)			1 second
Isolation Voltage <sup>(5)</sup>	I/P to O/P	without suffix	tested for 1 second rated for 1 minute 1kVDC 500VAC/60Hz
		with suffix "/H"	tested for 1 second rated for 1 minute 2kVDC 1kVAC/60Hz
Isolation Resistance			10GΩ min.
Isolation Capacitance			75pF max.
Insulation Grade			basic
<p><b>Notes:</b></p> <p>Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage</p> <p>Note6: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T0.5A slow blow type</p>			

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	full load @ free air convection (see graph)		-40°C to +100°C
Operating Altitude			2000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	4494 x 10 <sup>3</sup> hours
		+100°C	1352 x 10 <sup>3</sup> hours

**Derating Graph**  
(@ free air convection)

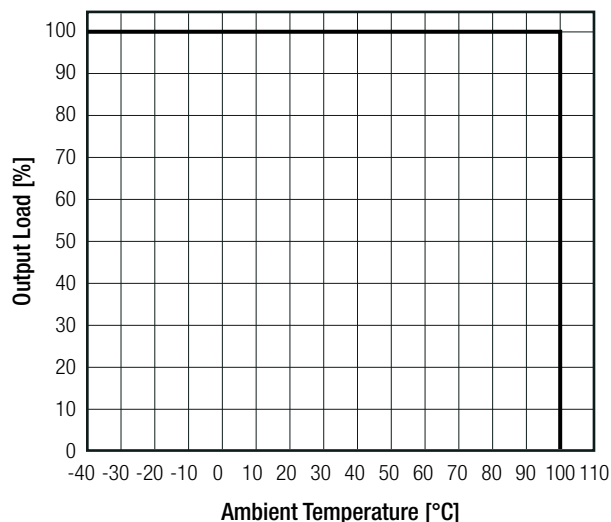

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)



**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	LVD1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
Information Technology Equipment, General Requirements for Safety	E358085-A4-UL	UL60950-1, 2nd Edition:2007 CAN/CSA C22.2 No. 60950-1-03, 2nd Edition:2007
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2		RoHS-2011/65/EU + AM-2015/863

**DIMENSION AND PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic, (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		11.5 x 6.0 x 10.0mm
Weight		1.4g typ.

**Dimension Drawing (mm)**

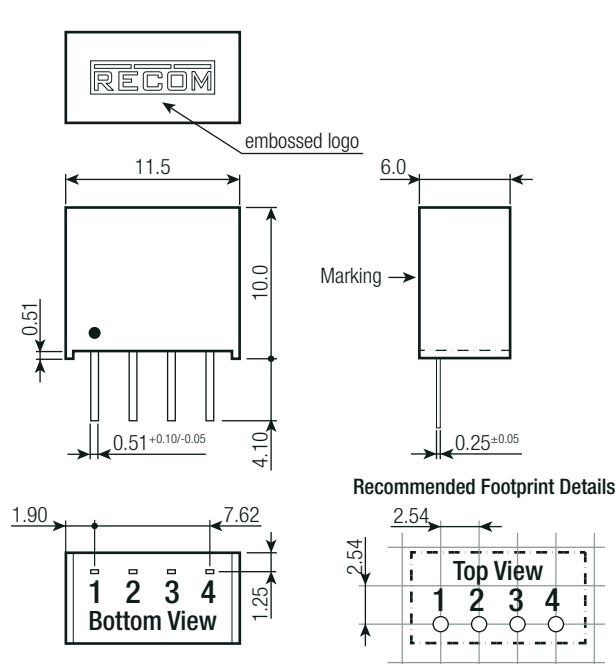

**Pinning information**

Pin #	Single
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Tolerance:  
xx.x= ±0.5mm  
xx.xx= ±0.25mm

**PACKAGING INFORMATION**

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 16.0 x 9.0mm
Packaging Quantity	tube	42pcs
Storage Temperature Range		-55°C to + 125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [RECOM POWER](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)