

Features

Unregulated Converters

- Pot-core transformer - separated windings
- high 5.2kVDC/1s basic isolation in compact size
- Optional continuous short circuit protection
- Efficiency up to 82%
- Pin compatible with RH and RK series
- Suitable for IGBT applications
- IEC/EN/UL/CSA 60950-1 certified



RP

1 Watt
SIP7
Single and Dual Output



Description


The RP series has very high isolation of 5.2kVDC in a compact size. The converters are suitable for IGBT driver applications. The /X2 version has rearranged pins to permit an input output separation of more than 9mm.

Selection Guide

| Part Number | nom. Input Voltage [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. ⁽¹⁾ [%] | max. Capacitive Load ⁽²⁾ [µF] |
|----------------------------|--------------------------|----------------------|---------------------|------------------------------------|--|
| RP-xx3.3S ^(3,4) | 5, 9, 12, 15, 24 | 3.3 | 303 | 70 | 2200 |
| RP-xx05S ^(3,4) | 5, 9, 12, 15, 24 | 5 | 200 | 70-72 | 1000 |
| RP-xx09S ^(3,4) | 5, 9, 12, 15, 24 | 9 | 111 | 75 | 1000 |
| RP-xx12S ^(3,4) | 5, 9, 12, 15, 24 | 12 | 84 | 75-78 | 470 |
| RP-xx15S ^(3,4) | 5, 9, 12, 15, 24 | 15 | 66 | 80 | 470 |
| RP-xx24S ^(3,4) | 5, 9, 12, 15, 24 | 24 | 42 | 80 | 220 |
| RP-xx3.3D ⁽³⁾ | 5, 9, 12, 15, 24 | ±3.3 | ±152 | 70 | ±1000 |
| RP-xx05D ⁽³⁾ | 5, 9, 12, 15, 24 | ±5 | ±100 | 74-76 | ±470 |
| RP-xx09D ⁽³⁾ | 5, 9, 12, 15, 24 | ±9 | ±56 | 75 | ±470 |
| RP-xx12D ⁽³⁾ | 5, 9, 12, 15, 24 | ±12 | ±42 | 79-82 | ±220 |
| RP-xx15D ⁽³⁾ | 5, 9, 12, 15, 24 | ±15 | ±33 | 80-82 | ±220 |
| RP-xx24D ⁽³⁾ | 5, 9, 12, 15, 24 | ±24 | ±21 | 80 | ±100 |
| RP-xx1509D | 5,12,24 | +15/-9 | ±42 | 70-85 | ±220 |

Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient
 Note2: Max Cap Load is tested at nominal input and full resistive load



Model Numbering



Notes:

- Note3: standard part is without continuous short circuit protection
 add suffix „/P“ for continuous short circuit protection
 Note4: add suffix „/X2“ for alternative pinning (only available for single outputs)
 or add suffix „/P/X2“ for continuous short circuit protection and alternative pinning

Ordering Examples:

- RP-123.3S/P: 12V Input Voltage, 3.3V Output Voltage, Single Output with continuous short circuit protection
 RP-0509S/X2: 5V Input Voltage, ±9V Output Voltage, Single Output with alternative pinning
 RP-0505S/P/X2: 5V Input Voltage, 5V Output Voltage, Single Output with continuous short circuit protection and alternative pinning

UL60950-1 certified*
 CSA/CAN C22.2 No. 60950-1-07 certified*
 IEC/EN60950-1 certified
 IEC/EN60601-1 certified*
 EN55032 compliant

*+15/-9 version excluded


Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

BASIC CHARACTERISTICS


| Parameter | Condition | Min. | Typ. | Max. |
|------------------------------|-----------|-------|--------|-----------|
| Internal Input Filter | | | | capacitor |
| Input Voltage Range | | | ±10% | |
| Minimum Load | | 0% | | |
| Start-up time | | | | 250ms |
| Internal Operating Frequency | | 50kHz | 100kHz | 120kHz |
| Output Ripple and Noise | 20MHz BW | | | 100mVp-p |

Efficiency vs. Load


RP-xx05S

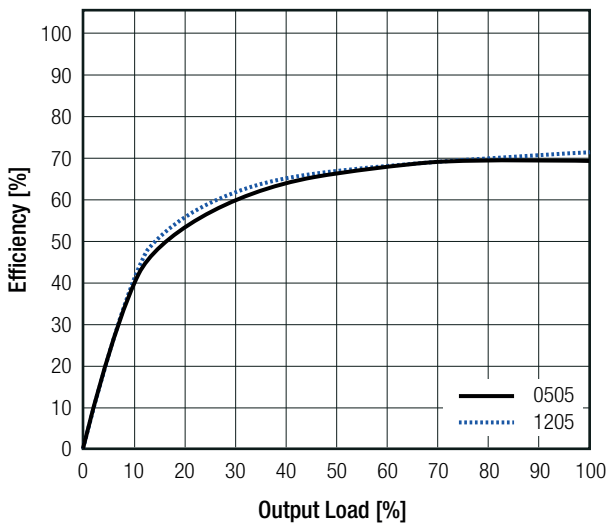


RP-xx12S

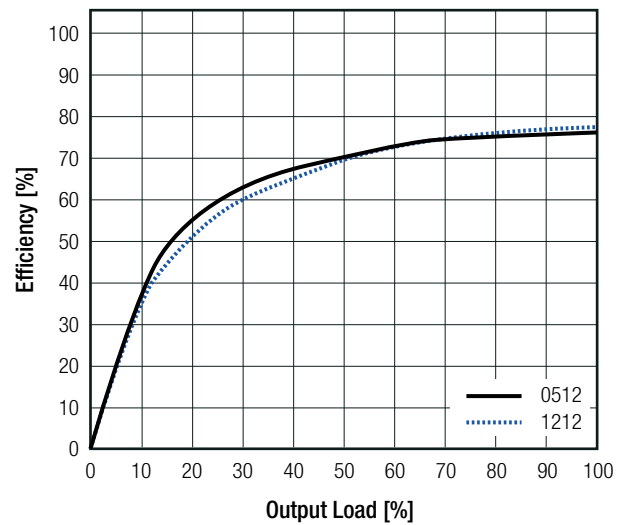

RP-xx15S

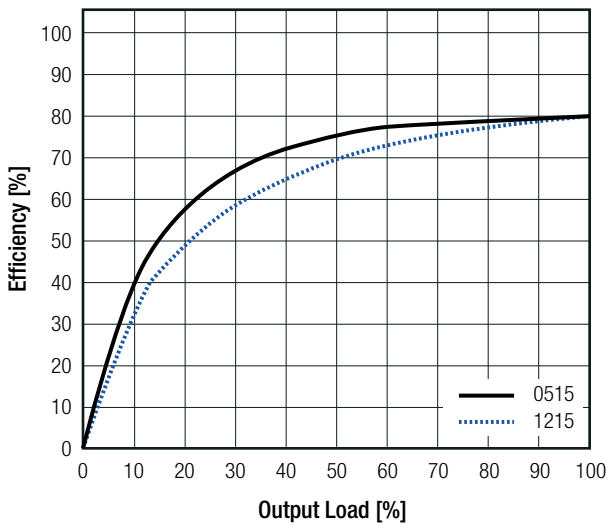



RP-xx05D

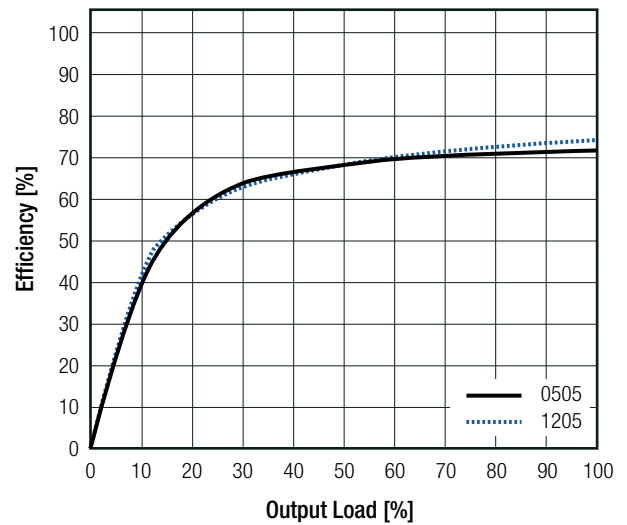

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

Efficiency vs. Load

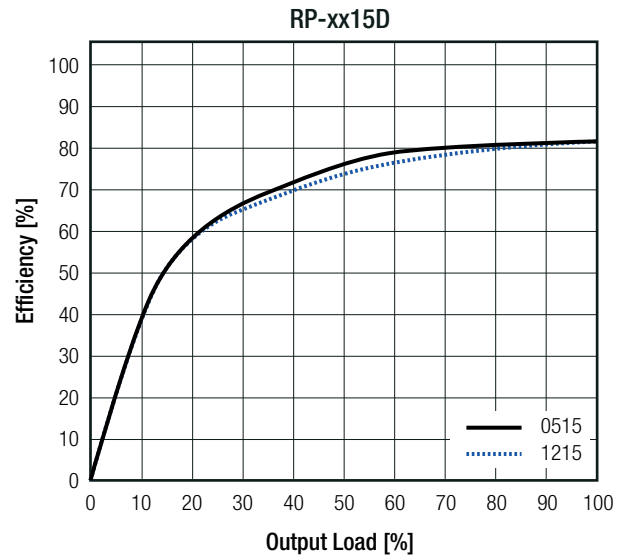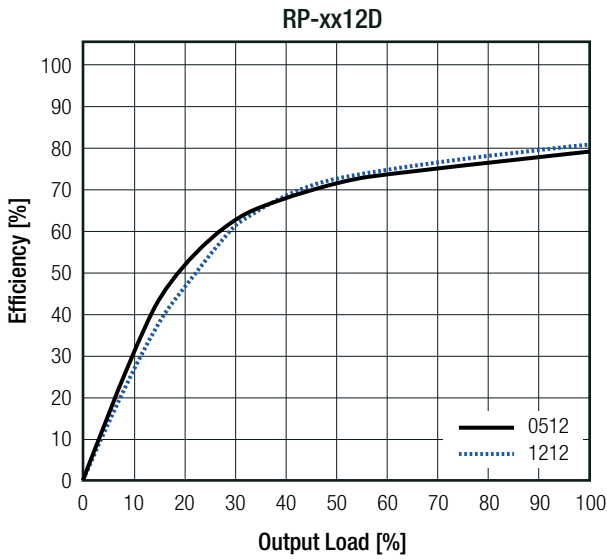



REGULATIONS

| Parameter | Condition | | Value |
|--------------------------------|-----------------------|----------------------------------|------------------------|
| Output Accuracy | | | ±5.0% max. |
| Line Regulation | low line to high line | | ±1.2% of 1.0% Vin typ. |
| Load Regulation ⁽⁵⁾ | 10% to 100% load | 3.3Vout | 20.0% max. |
| | | 5Vout | 15.0% max. |
| | | 9, 12, 15, 24Vout and RP-xx1509D | 10.0% max. |

Notes:

Note5: Operation below 10% load will not harm the converter, but specifications may not be met





Deviation vs. Load

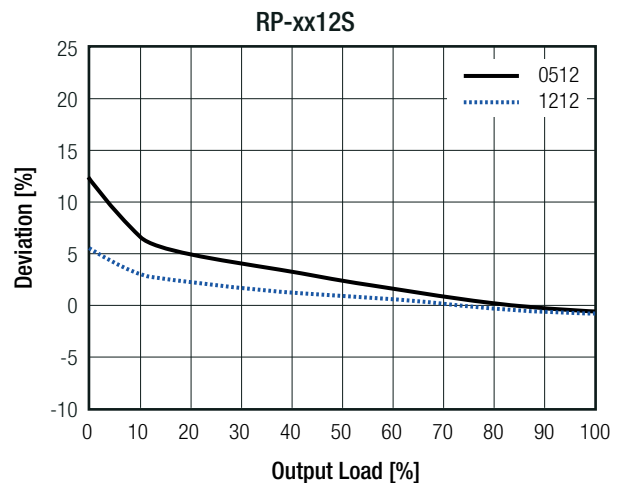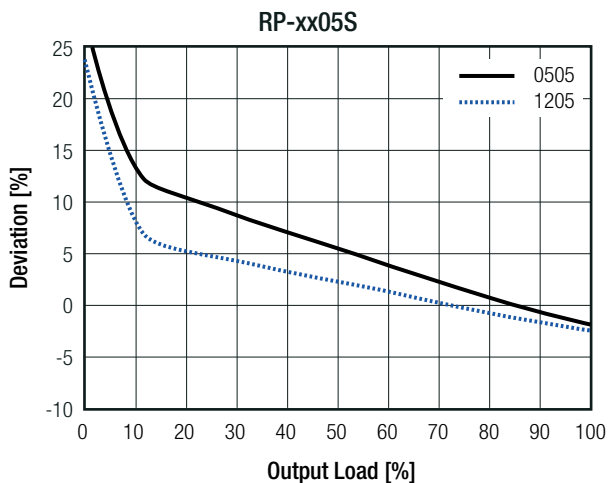

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

Deviation vs. Load

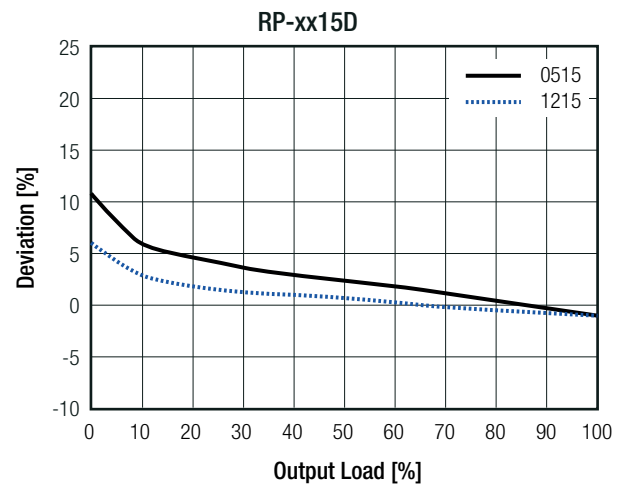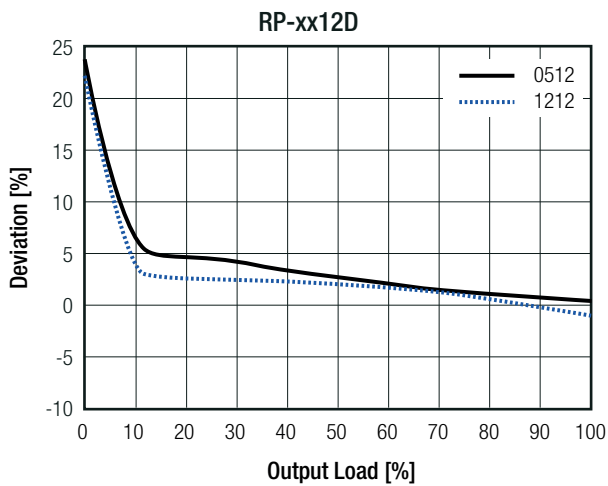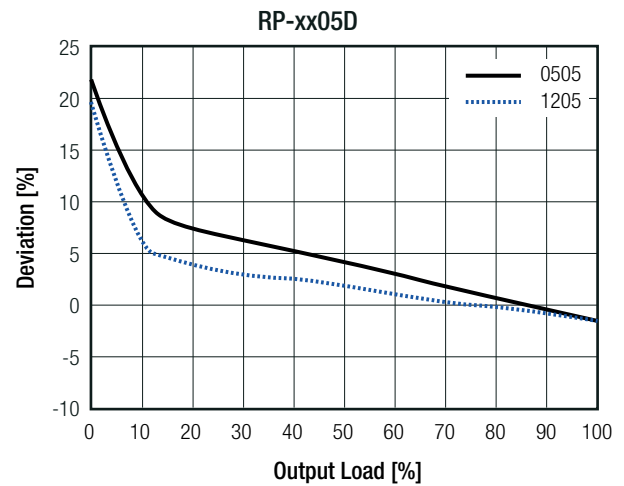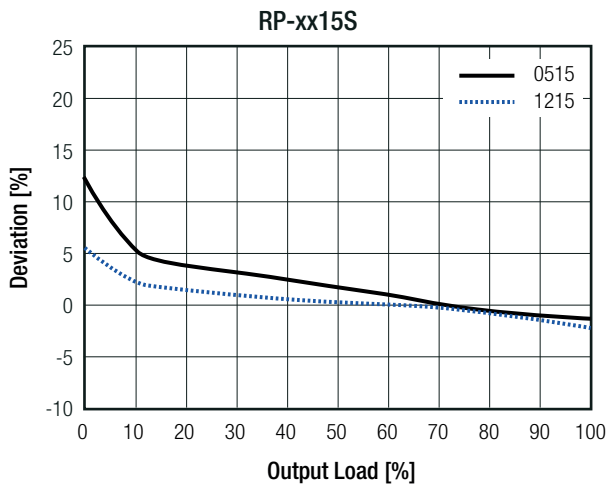


| PROTECTIONS | | | |
|--|------------------------------------|---|---|
| Parameter | Type | | Value |
| Short Circuit Protection (SCP) | without suffix with suffix "/P" | | 1 second continuous |
| Isolation Voltage ⁽⁶⁾ | I/P to O/P | tested for 1 second rated for 1 minute | 5.2kVDC 2kVAC/60Hz |
| Isolation Resistance | | | 20GΩ min. |
| Isolation Capacitance | | | 4pF min. / 10pF max. |
| Insulation Grade | | | basic (IEC/EN60950-1) functional (IEC/EN60601-1) |
| Notes: | | | |
| Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage | | | |
| Note7: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T1A slow blow type | | | |

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

ENVIRONMENTAL

| Parameter | Condition | | Value |
|-----------------------------|----------------------------------|-------|-------------------------------|
| Operating Temperature Range | full load (see graph) | | -40°C to +85°C |
| Maximum Case Temperature | | | +105°C |
| Operating Altitude | | | 3000m |
| Operating Humidity | non-condensing | | 95% RH max. |
| Pollution Degree | | | PD2 |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 18400 x 10 ³ hours |
| | | +85°C | 6900 x 10 ³ hours |

Derating Graph

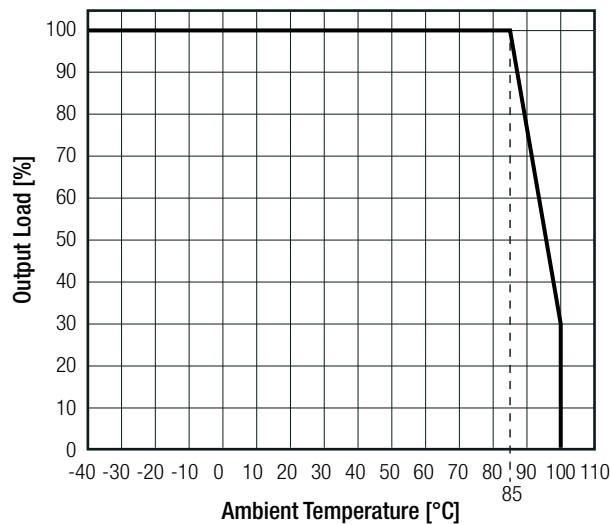

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|--|----------------------------------|---|
| Information Technology Equipment, General Requirements for Safety | E358085-A6-UL ^(8,9) | UL60950-1, 2nd Edition:2007 CAN/CSA C22.2 No. 60950-1-03, 2nd Edition:2007 |
| Information Technology Equipment, General Requirements for Safety | SPCLVD1602031 ⁽⁹⁾ | IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013 |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance | WD-SE-R-180676-A0 ⁽⁸⁾ | IEC60601-1:2005 + A1:2012, 3rd Edition EN60601-1:2006 + A1:2013 + A12:2014 |
| EAC | RU-AT.49.09571 | TP TC 004/2011 |
| RoHS 2+ | | RoHS-2011/65/EU + AM-2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|---|---|--------------------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements | with external filter (see filter suggestion below) | EN55032, Class B EN55032, Class A |


Notes:

- Note8: excluded +15/-9 version
- Note9: excluded suffix „/X2“

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

EMC Filter Suggestion according to EN55032

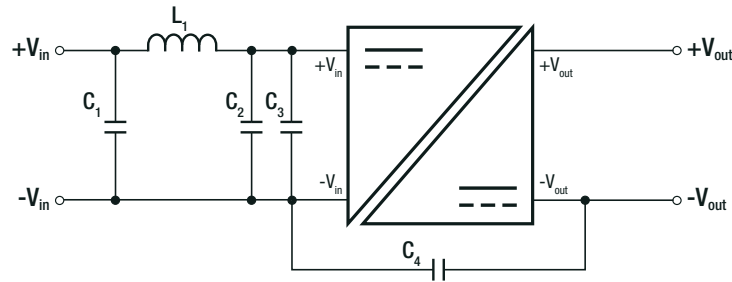

Component List Class A

| MODEL | C2 | C3 |
|----------|-----------|----------|
| RP-0505S | 10µF | 4.7µF |
| RP-0515S | | |
| RP-2405S | 100V MLCC | 50V MLCC |
| RP-2424S | | |

Component List Class B

| MODEL | C1 | L1 | C4 (safety) |
|----------|-----------|-----------------------|-------------|
| RP-0505S | 10µF | 22µH choke RLS-226 | 2.2nF |
| RP-0515S | | | |
| RP-2405S | 100V MLCC | | |
| RP-2424S | | | |


Notes:

Note10: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|------------------------|---|
| Material | case potting PCB | non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0) |
| Dimension (LxWxH) | | 19.65 x 7.05 x 10.2mm |
| Weight | | 2.4g typ. |

Dimension Drawing (mm)

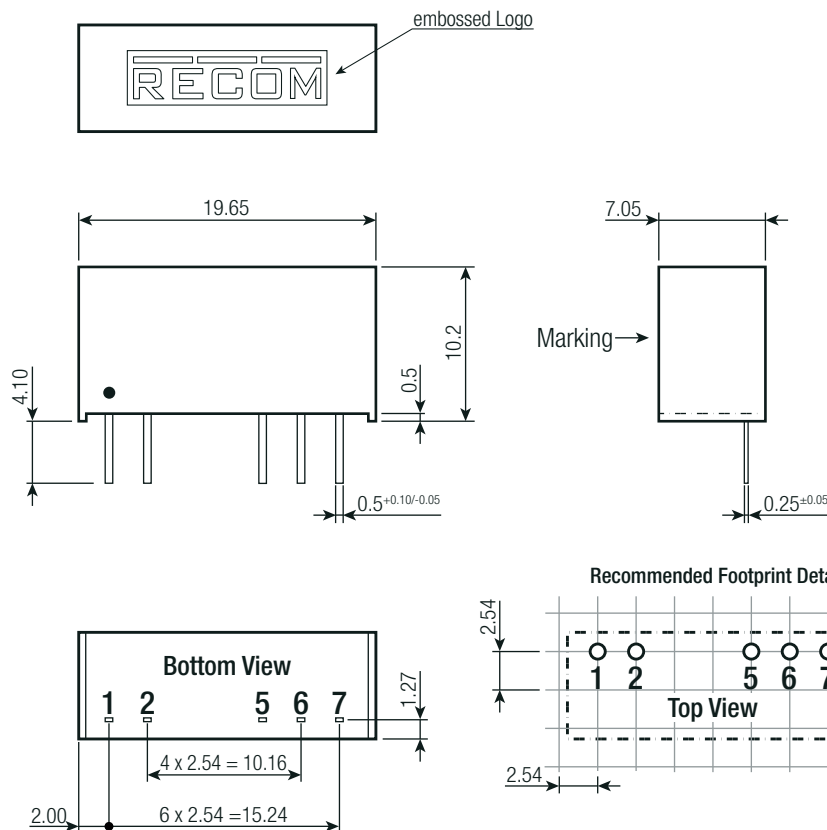

Pinning information


| Pin # | Single | Dual | /X2 |
|-------|--------|-------|--------|
| 1 | +Vin | +Vin | +Vin |
| 2 | -Vin | -Vin | -Vin |
| 5 | -Vout | -Vout | no Pin |
| 6 | no pin | Com | -Vout |
| 7 | +Vout | +Vout | +Vout |

Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

INSTALLATION AND APPLICATION

IGBT Application Circuit

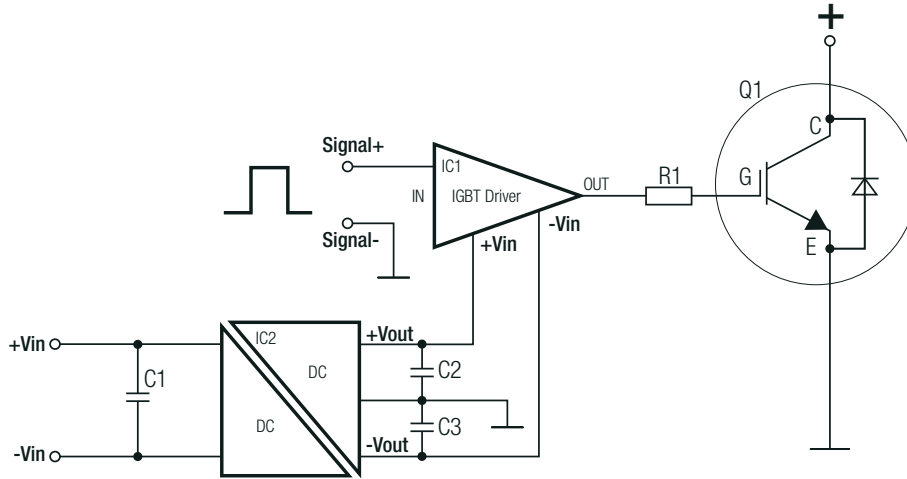

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|----------------|----------------------|
| Packaging Dimension (LxWxH) | tube | 520.0 x 16.0 x 9.0mm |
| Packaging Quantity | tube | 25pcs |
| Storage Temperature Range | | -55°C to + 125°C |
| Storage Humidity | non-condensing | 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Recom Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [SSQE48T25025-NAA0G](#) [L-DA20](#) [HP3040-9RG](#) [HP1001-9RTG](#) [NVD0.4YJJ-M6G](#) [XKS-2415](#)