


_OVIS

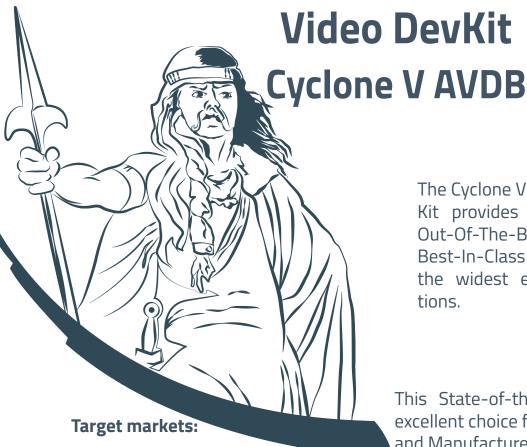


The Cyclone V AVDB Video Development Kit provides to developers the best Out-Of-The-Box experience, offering the Best-In-Class FPGA video platform and the widest embedded video applications.

This State-of-the Art High-End board is an excellent choice for Professional A/V Developers and Manufacturers.

Video broadcasting

Real time video

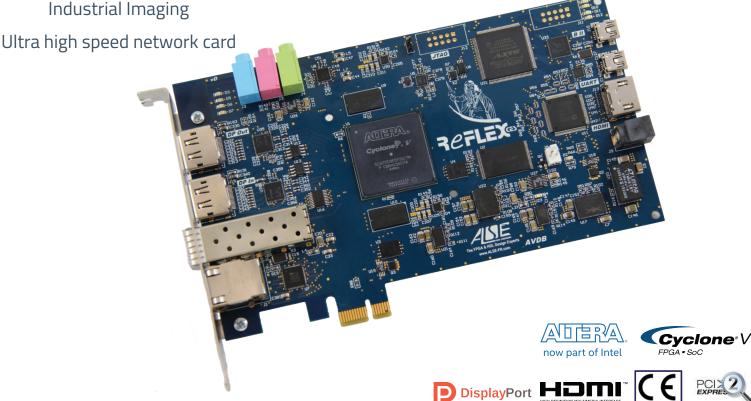





CLOVIS Video DevKit Cyclone V AVDB

FPGA and configuration modules

- Altera Cyclone V GT 301 kLEs (D9) FBGA 896 5CGTFD9
- 2 x Quad-SPI Flash: 256 Mbits config + 256 Mbits user
- Configuration and debugging can be performed using the on-board USB-Blaster II on board

Communication Interfaces

- PCI Express x1 (Gen 2) on PCI Express edge connector
- 1x SFP+ quad optical cage (1XCVR: 6.144 Gb/s)
- Other protocols supported by SFP modules: SDI + HD-SDI + 3G-SDI
- 1GbE 10Base-T/100 Base-TX/1000Base-T networking interface

Versatile Video Input/output interfaces and Audio

- 1 x HDMI 1.4a input connector
- 1 x full size Display Port 1.2 input connector
- 1 x Full size Display Port 1.2 Video output connector usable as HDMI output.
- On board Analog Device Audio Codec with associated audio connectors (on top)

Board Capabilities

- The PCIe bandwidth allows full Gigabit data streaming transfers
- Several ready-made applications are available as options for developers who wants to focus on the internal processing while controlling the application through Ethernet and using UDP streaming. Please contact ALSE for more information.
- ALSE has developed IP blocks (to purchase separately, if needed) for all the board's functions, including :

Ultra High performance Gigabit Ethernet communication hardware stack (GEDEK), multi-format HDMI in/out (up to Ultra-HD/4K) with sound, video coder/decoder. The Altera Video IP (VIP) suite can also be used on AVDB

Power Supply

Power consumption < 15 W, PCle or Jack connector (12V)

Board Size

Standard Height PCle board: 180 mm x 106,65 mm

Memories

- On board DDR3 800 MHz/1GB
- On board 32 Gigabits NAND Flash can store up to 4 Gbytes of

Kit Content

- Standard height PCIe Board form factor
- PCIe bracket
- Content and Limitations letter
- Starter Guide
- Power Supply and adapter cable (US,UK,EU,JP)

Kit Ordering information


 Clovis CycloneV Video Development Kit (AVDB) RXCC5T030PF31-IDK00A

- USB 2.0 High speed type AB cordon
- Ethernet CABLE 7'CAT5E STD, male, RJ-45
- DisplayPort 1.2 cordon
- Display Port Male to HDMI Female Converter Cable

Partner



Advanced Logic Synthesis for Electronics
The ASIC-FPGA Design Experts

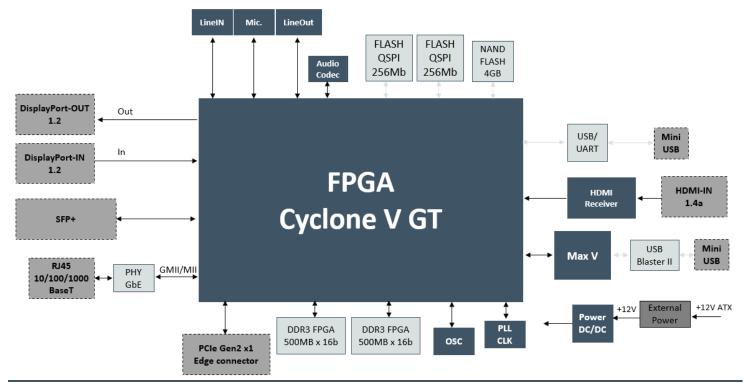

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Programmable Logic IC Development Tools category:

Click to view products by ReFLEX CES manufacturer:

Other Similar products are found below:

DK-DEV-5SGXEA7N 88980182 DEV-17526 DEV-17514 LCMXO3L-SMA-EVN 471-014 80-001005 iCE40UP5K-MDP-EVN

ALTNITROC5GX 471-015 Hinj SnoMakrR10 DK-DEV-1SDX-P-A DK-DEV-1SDX-P-OES DK-DEV-1SGX-L-A DK-DEV-1SMC-H-A

DK-DEV-1SMX-H-0ES DK-DEV-1SMX-H-A DK-DEV-4CGX150N DK-DEV-5CGTD9N DK-DEV-5CSXC6N DK-MAXII-1270N DK-SI-1SGX-H-A DK-SI-1STX-E-OES DK-SI-1STX-E-A DK-SI-5SGXEA7N EK-10M08E144 ATF15XX-DK3-U SLG46824V-DIP

SLG46826V-DIP 240-114-1 6003-410-017 ICE40UP5K-B-EVN DK-SOC-1SSX-L-D ICE5LP4K-WDEV-EVN L-ASC-BRIDGE-EVN

LC4256ZE-B-EVN LCMXO2-7000HE-B-EVN LCMXO3D-9400HC-B-EVN LCMXO3L-6900C-S-EVN LF-81AGG-EVN LFE3-MEZZ-EVN LIF-MD6000-ML-EVN LPTM-ASC-B-EVN M2S-HELLO-FPGA-KIT VIDEO-DC-USXGMII 12GSDIFMCCD SFP+X4FMCCD

NAE-CW305-04-7A100-0.10-X NOVPEK CVLite