

# LR44

Calculator Battery

## Technical Data Sheet


### Specifications

Chemical system	Zinc / Manganese Dioxide, high drain
Nominal Voltage	1,50 V
Capacity	115 mAh, Discharge over 8,25 kΩ at 20 °C to 0,9 V
Operating Temperature	0 °C – 60 °C
Self Discharge	Less than 10% per year at 20 °C
Weight	~1,95 g

### Dimensions


(according IEC 60086-2)

Diameter	11,60 mm (0,457")
Height	5,40 mm (0,213")

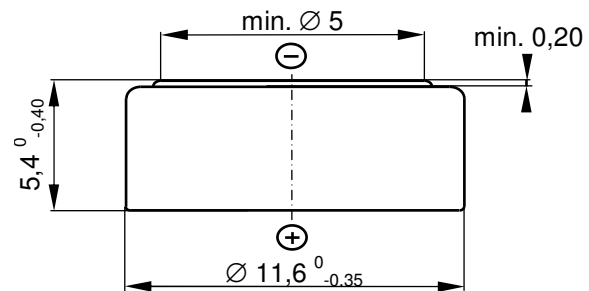

### Discharge Curve

Constant Load	8,25 kΩ
Starting Drain	190 μA
Temperature	20 °C

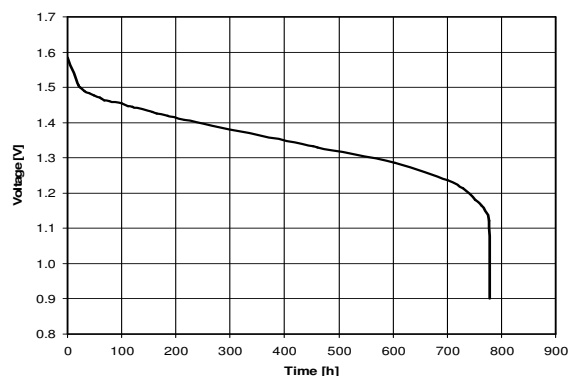

*Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.*

Rev. LR44.05 09/05

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Coin Cell Battery](#) category:*

Other Similar products are found below :

[315](#) [317](#) [329](#) [364](#) [CR1216](#) [CR1220](#) [CR1616](#) [CR1620](#) [CR1632](#) [CR2016](#) [CR2025](#) [CR2032](#) [CR2430](#) [CR2450](#) [CR2450W](#) [CR2032X](#)  
[CR2450X](#) [CR2477X](#) [CR2032R](#) [CR2032R-HO6](#) [CR3677X](#) [CR2032W-HO6](#) [CR2477W-HE2](#) [CR2477NRH-LF](#) [CR2477NRV-LF](#)  
[CR2325RV-LF](#) [CR2325RH-LF](#) [CR2325FH-LF](#) [449915B](#) [RJD3048HPPV30M](#) [NI-MH-B80H-3A3H](#) [T04/56](#) [413675G](#) [095668F](#) [458980A](#)