



SAW Components

SAW Duplexer for Smallcell

Band 17 (3G/LTE)

Series/type:	B8017
Ordering code:	B39741B8017P810
Date:	February 25, 2015
Version:	2.3

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data sheet


Application


- Low-loss SAW duplexer for 3G/LTE smallcell systems (Band 17)
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 12 MHz
- High power durability
- Industrial qualification
- Rx = Uplink = 704-716 MHz
- Tx = Downlink = 734-746 MHz


Features

- Package size 2.5 * 2.0 mm²
- max. Package height 0.5 mm
- RoHS compatible
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- Moisture Sensitivity Level 3

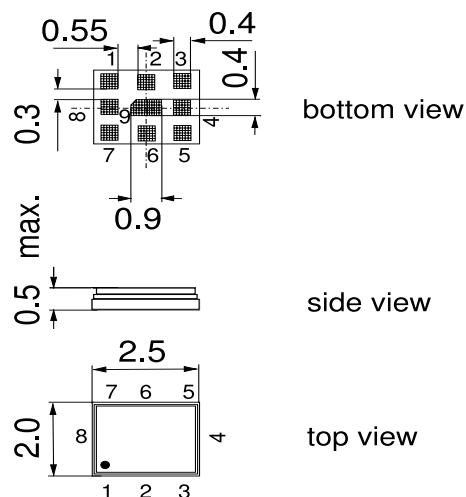
Pin configuration

- 3 RX output
- 1 TX input
- 6 Antenna
- 2, 4, 5, 7, 8, 9 To be grounded

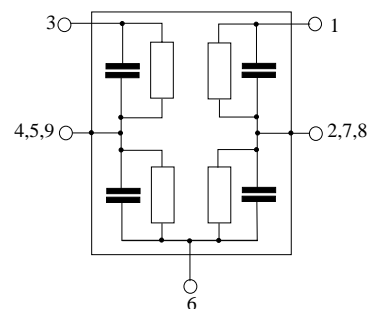

Data sheet


Characteristics

Temperature range for specification:	T = -10 °C to +85 °C
Antenna terminating impedance:	Z _{ANT} = 50 Ω 30 nH
RX terminating impedance:	Z _{RX} = 50 Ω
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics ANT - RX		min.	typ. @ 25 °C	max.	
Center frequency	f _C	—	710.0	—	MHz
Maximum insertion attenuation 704.0 ... 716.0 MHz	α _{max}	—	2.0	3.2	dB
Amplitude ripple (p-p) 704.0 ... 716.0 MHz	Δα	—	0.6	2.0	dB
Error Vector Magnitude @f _{carrier} 706.5 ... 713.5 MHz	EVM ¹⁾	—	2.3	3.8	%
Input VSWR (ANT port) 704.0 ... 716.0 MHz		—	1.5	1.7	
Output VSWR (RX port) 704.0 ... 716.0 MHz		—	1.6	1.8	
Attenuation	α				
10.0 ... 600.0 MHz		40	55	—	dB
693.25 ... 697.75 MHz		10	20	—	dB
699.0 ... 700.0 MHz		1.5	12	—	dB
700.0 ... 704.0 MHz		1	2	—	dB
716.0 ... 722.2 MHz		1	2	—	dB
722.2 ... 724.0 MHz		7	16	—	dB
724.0 ... 728.0 MHz		15	17	—	dB
729.0 ... 734.0 MHz		35	55	—	dB
734.0 ... 746.0 MHz		50	55	—	dB
746.0 ... 756.0 MHz		48	56	—	dB
758.0 ... 768.0 MHz		45	49	—	dB
869.0 ... 894.0 MHz		40	50	—	dB
1408.0 ... 1432.0 MHz		50	60	—	dB
1930.0 ... 1990.0 MHz		45	56	—	dB
2110.0 ... 2170.0 MHz		45	56	—	dB
2400.0 ... 2500.0 MHz		45	56	—	dB
2816.0 ... 2864.0 MHz		45	57	—	dB
3000.0 ... 6000.0 MHz		15	26	—	dB

1) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

Data sheet


Characteristics

Temperature range for specification:	T = -10 °C to +85 °C
Antenna terminating impedance:	Z _{ANT} = 50 Ω 30 nH
RX terminating impedance:	Z _{RX} = 50 Ω
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics TX - ANT		min.	typ. @ 25 °C	max.	
Center frequency	f _C	—	740.0	—	MHz
Maximum insertion attenuation 734.0 ... 746.0 MHz	α _{max}	—	1.6	2.2	dB
Amplitude ripple (p-p) 734.0 ... 746.0 MHz	Δα	—	0.5	1.1	dB
Error Vector Magnitude @f _{carrier} 736.5 ... 743.5 MHz	EVM ¹⁾	—	1.7	3.8	%
Input VSWR (TX port) 734.0 ... 746.0 MHz		—	1.5	1.8	
Output VSWR (ANT port) 734.0 ... 746.0 MHz		—	1.3	1.7	
Attenuation	α				
10.0 ... 600.0 MHz		30	43	—	dB
699.0 ... 704.0 MHz		50	54	—	dB
704.0 ... 716.0 MHz		50	54	—	dB
777.0 ... 787.0 MHz		40	55	—	dB
788.0 ... 798.0 MHz		40	50	—	dB
824.0 ... 849.0 MHz		40	46	—	dB
1468.0 ... 1492.0 MHz		40	52	—	dB
1574.0 ... 1606.0 MHz		45	53	—	dB
1710.0 ... 1755.0 MHz		40	52	—	dB
1850.0 ... 1915.0 MHz		40	48	—	dB
2202.0 ... 2238.0 MHz		30	43	—	dB
2400.0 ... 2500.0 MHz		35	42	—	dB
2936.0 ... 2984.0 MHz		20	40	—	dB
3000.0 ... 5000.0 MHz		10	21	—	dB
5000.0 ... 6000.0 MHz		10	15	—	dB

1) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

Data sheet

Characteristics

Temperature range for specification:	T = -10 °C to +85 °C
Antenna terminating impedance:	Z _{ANT} = 50 Ω 30 nH
RX terminating impedance:	Z _{RX} = 50 Ω
TX terminating impedance:	Z _{TX} = 50 Ω

Characteristics TX-RX				min.	typ. @ 25 °C	max.	
Attenuation							
	704.0 ... 716.0 MHz	α		53	58	—	dB
	734.0 ... 746.0 MHz			53	58	—	dB

Maximum Ratings

Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	0	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 1 pulse source and load impedance 50 Ω Pin 28 dBm average - 39 dBm peak } LTE 5 MHz downlink T = 55 °C, 100.000 h
Input power at pin 1				
734.0 ... 746.0 MHz	P _{in}	28 ²⁾	dBm	
elsewhere	P _{in}	10	dBm	source and load impedance 50 Ω Continuous wave T=55 °C, 100khrs
Operating lifetime with Output power at antenna				
734.0 ... 746.0 MHz	P _{out}	24 ³⁾	dBm	

¹⁾ According to JESD22-A115A (machine model), 1 negative and 1 positive pulses.


²⁾ Time to failure (TTDF) according to accelerated power durability tests, and wear out models.

³⁾ according to accelerated High Temperature Operating Life (HTOL) test.


Data sheet



Frequency Response ANT-RX

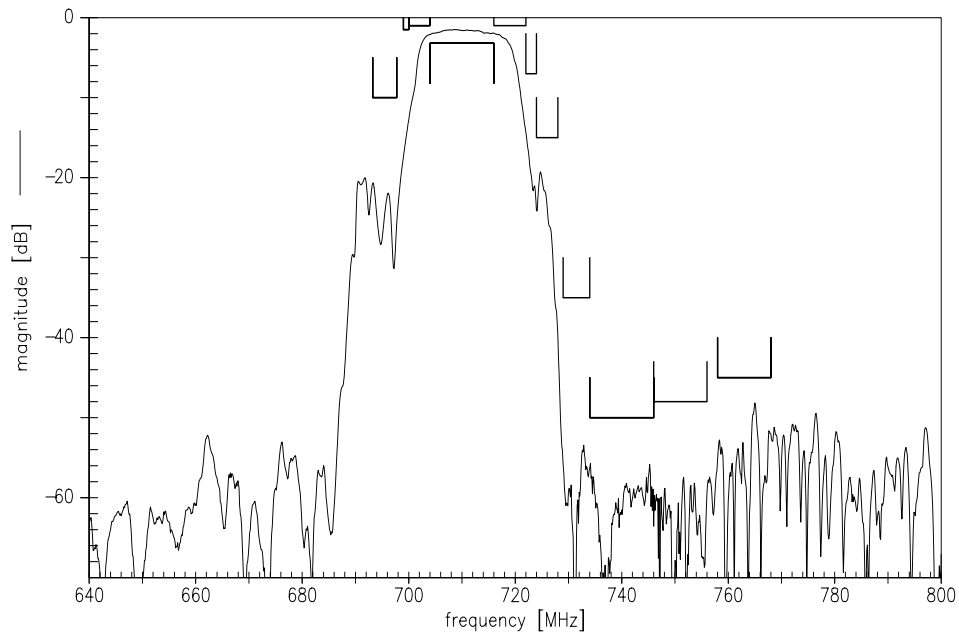

Frequency Response ANT-RX

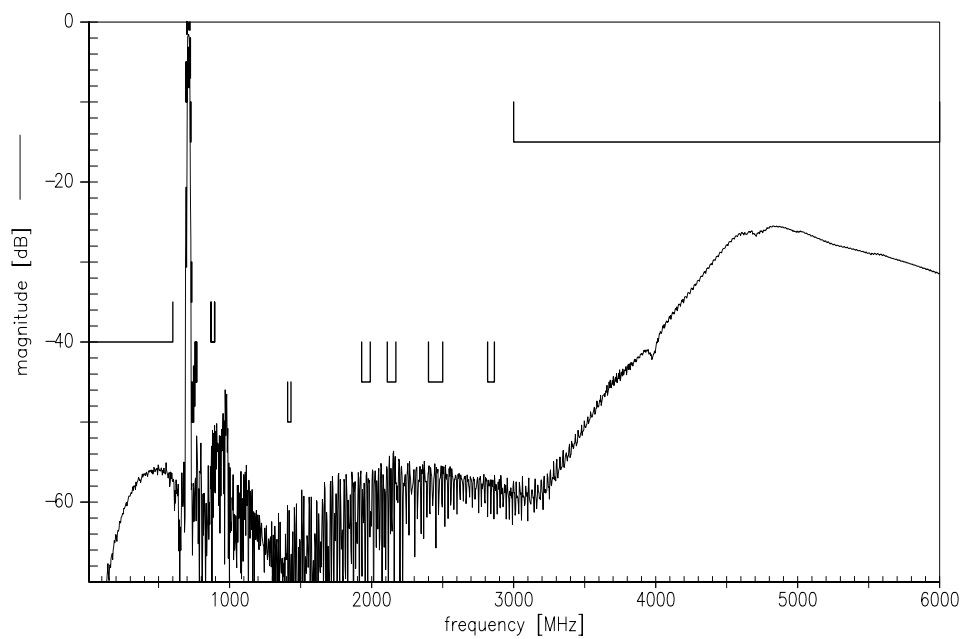


Please read *cautions and warnings* and *important notes* at the end of this document.


Data sheet



Frequency Response TX-ANT

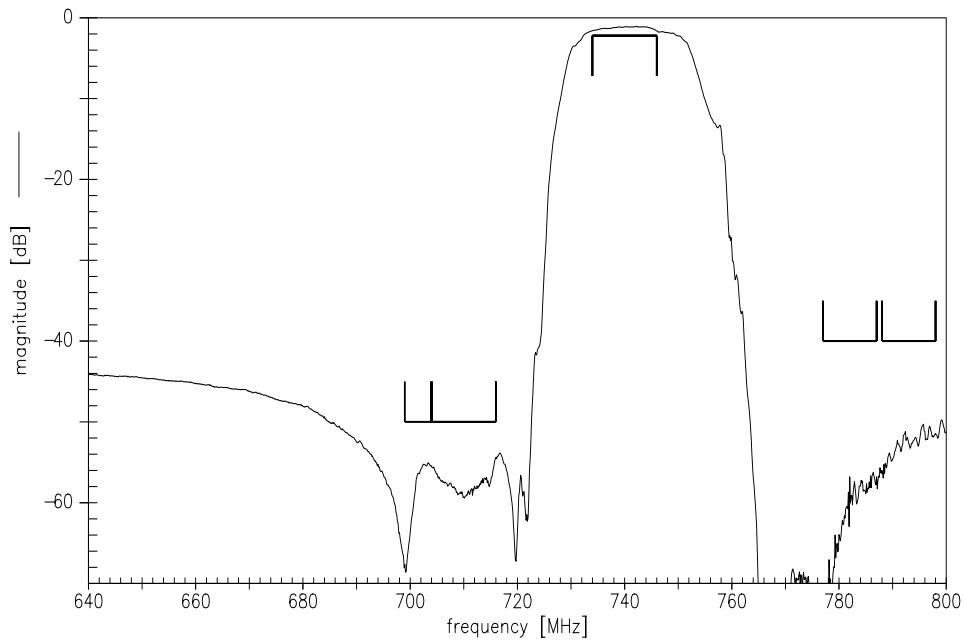

Frequency Response TX-ANT

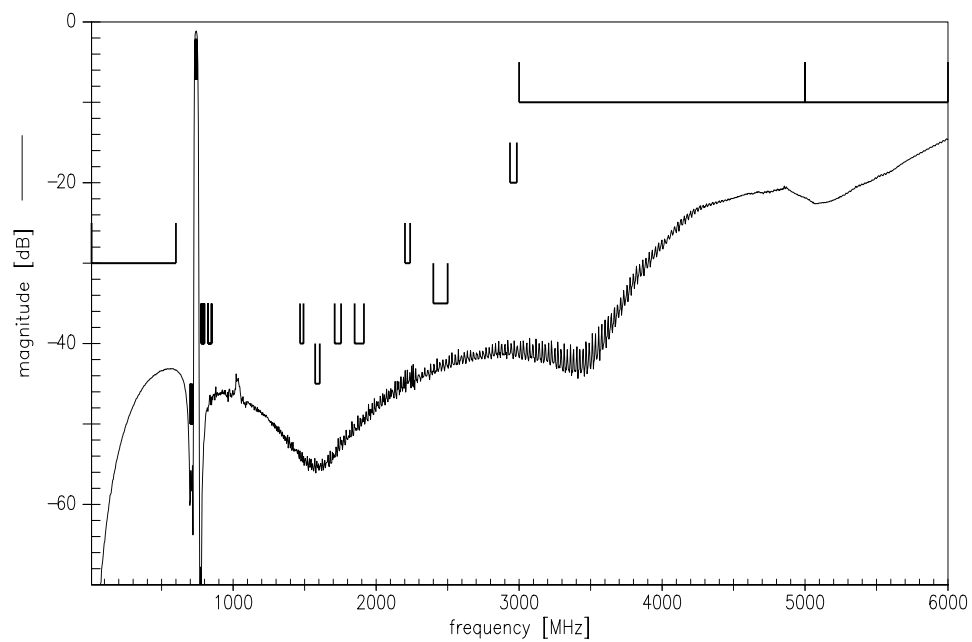


Please read *cautions and warnings* and *important notes* at the end of this document.


Data sheet



Frequency Response TX-RX

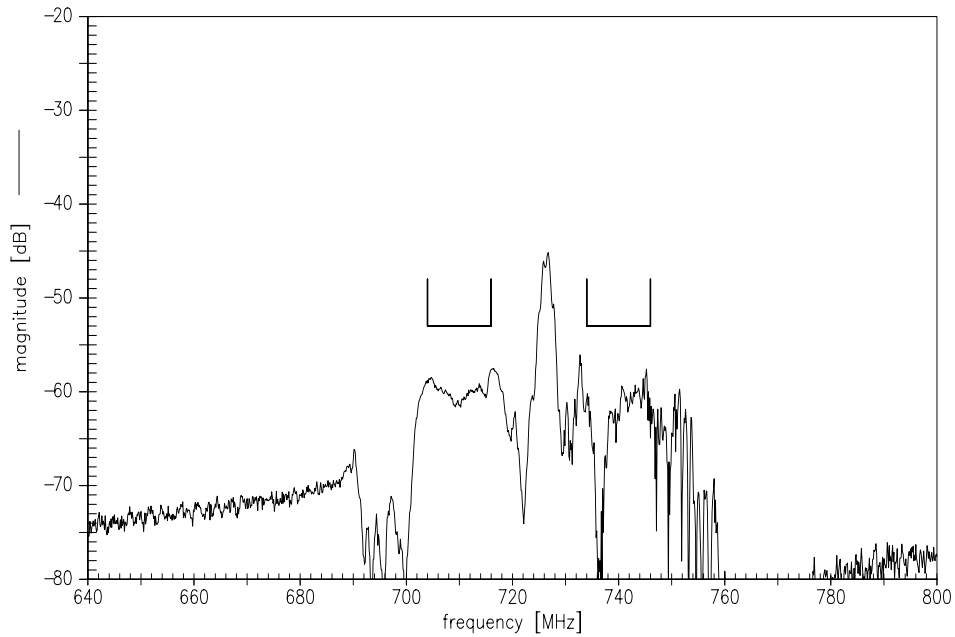

Frequency Response TX-RX


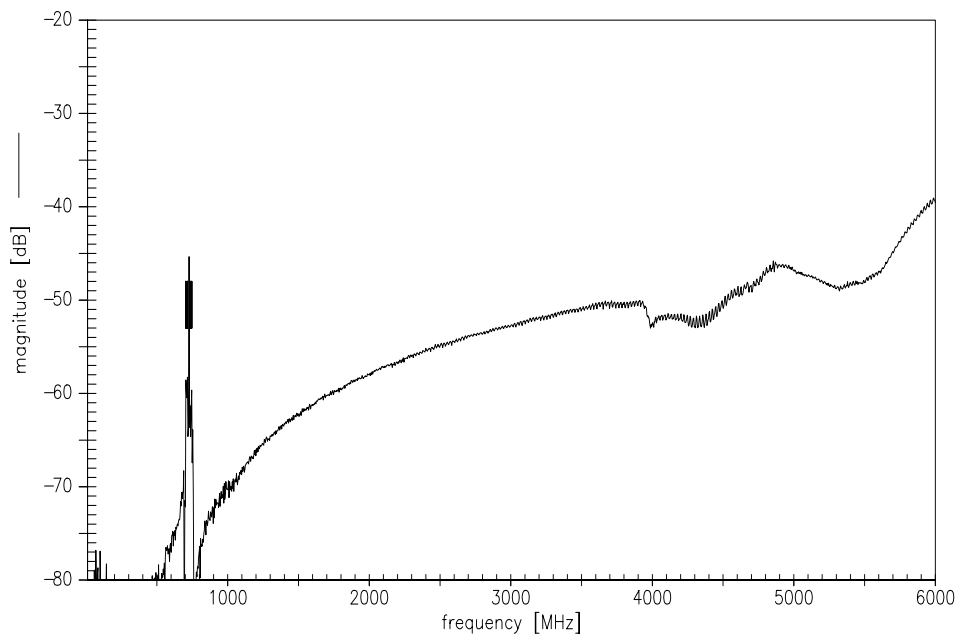


Please read *cautions and warnings* and *important notes* at the end of this document.



Data sheet





S11 VSWR (RX)

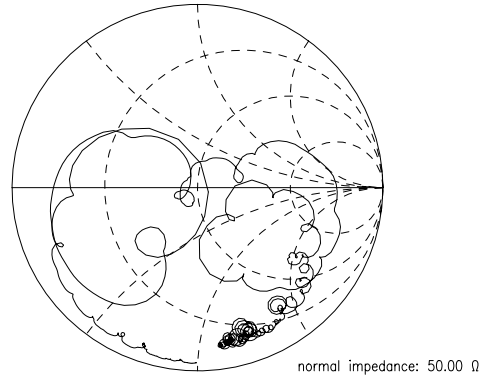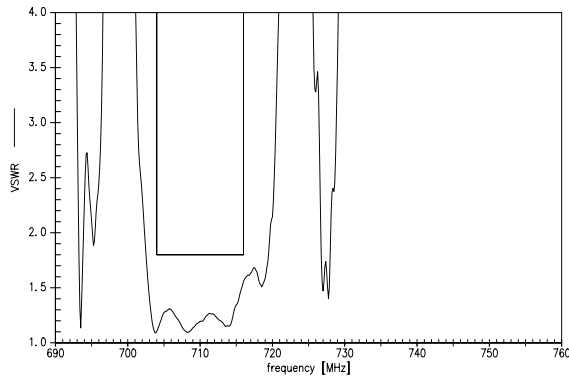

S22 VSWR (ANT)

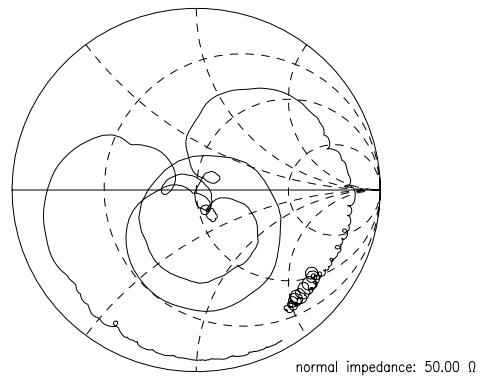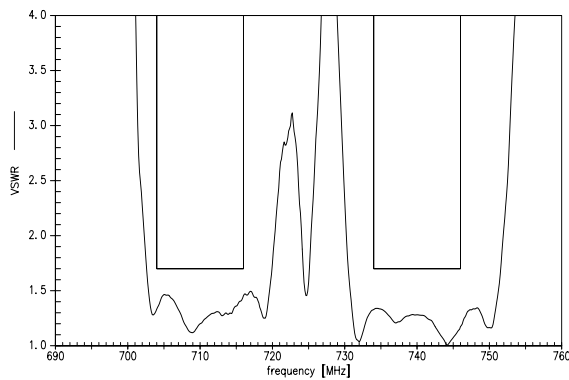


S33 VSWR (TX)

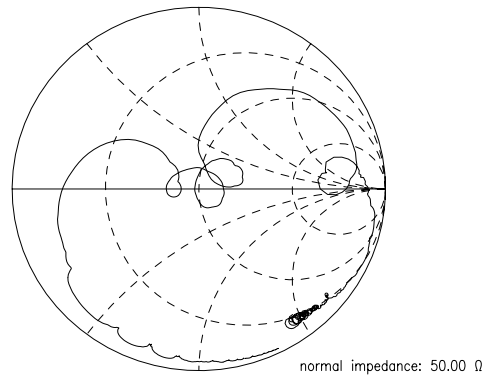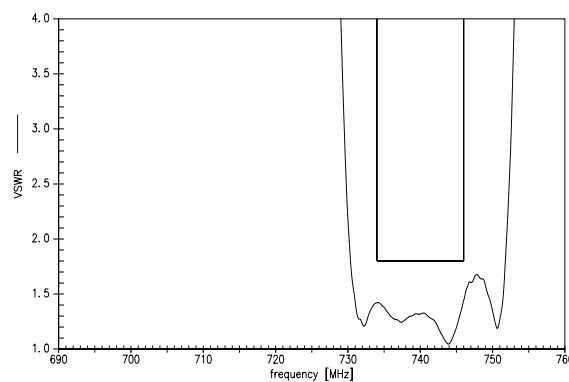


Data sheet



EVM RX

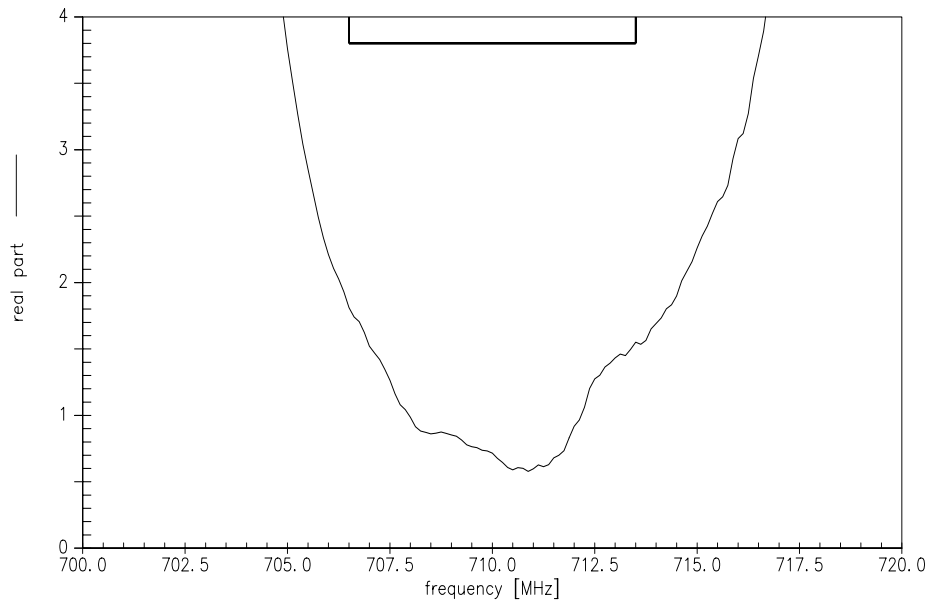

EVM TX

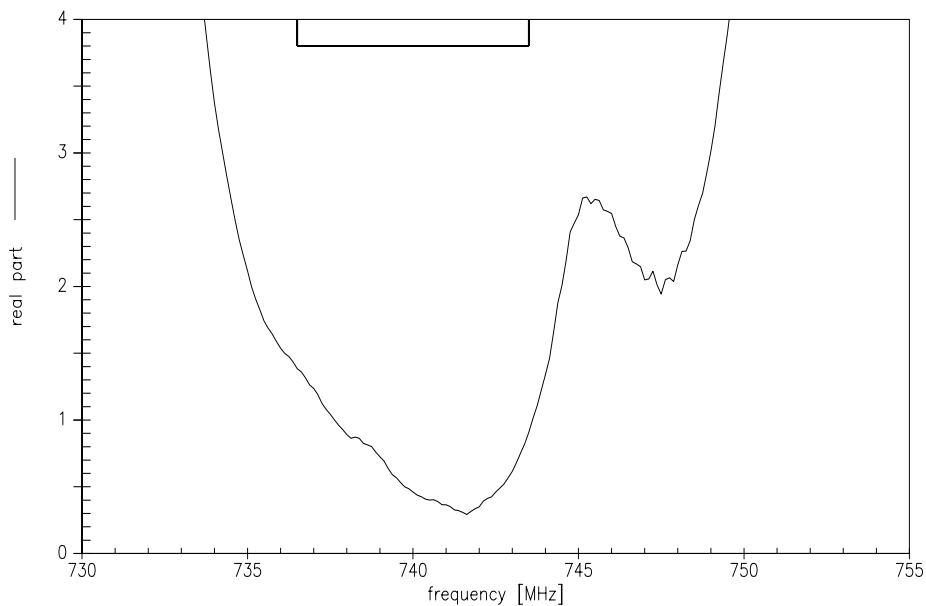

Please read *cautions and warnings and important notes* at the end of this document.

SAW Components

B8017

SAW Duplexer

710.0 / 740.0 MHz

Data sheet



References

Type	B8017
Ordering code	B39741B8017P810
Marking and package	C61157-A3-A27
Packaging	F61074-V8232-Z000
Date codes	L_1126
S-parameters	B8017_NB.s3p, B8017_WB.s3p See file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2015. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, Alu-X, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PQSine, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [RF360 manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)