


RFIC 2017.05 Update Rev1.5

DESCRIPTION


The SW470 is a SPDT GaAs switch, and designed for 0.1 to 6GHz frequency band application. The switch can be used for Tx/Rx selection or antenna diversity function in a variety of wireless communication systems.

The SW470 is housed in a miniature 1.5 x 1.5 (mm), 6-pin, DFN leadless package (Pb free), and features low insertion loss, high isolation and high linearity, particularly suitable for WiMAX, WLAN AP, and S-band wireless applications where high power switching is required.

Pin & Block Diagram

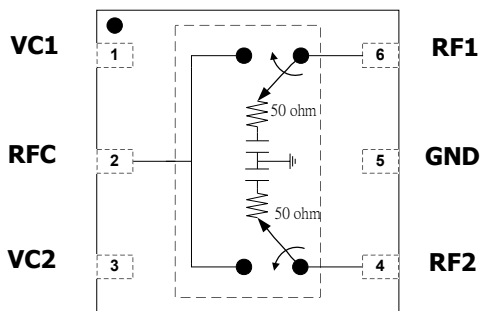

Evaluation Board Schematic

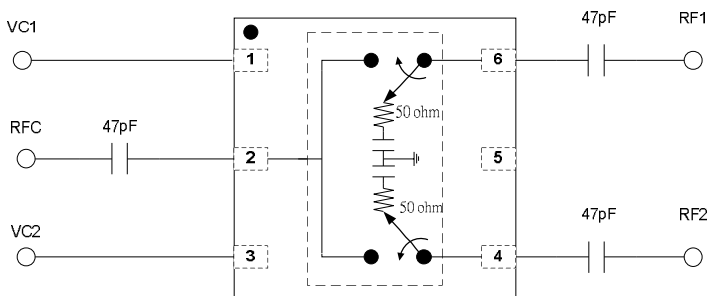

DC blocking capacitors are necessary for all RF ports (typical is 47 pF for >1GHz application). All unused ports are terminated in 50 Ω.

KEY FEATURES

- **Low Insertion:**
0.6dB (Typ.) @ 2.4GHz
1.2dB (Typ.) @ 5.8GHz
- **High Linearity**
P1dB ~ 36dBm
- **Low Control Current ~ 5uA**
- **Lead-Free and RoHS compliant**
- **Non-Reflective switch**

Pin Details

Pin No.	Name	Description
1	VC1	RF1 On/Off logic control
2	RFC	RF Common Port
3	VC2	RF2 On/Off logic control
4	RF2	RF Port2
5	GND	GND
6	RF1	RF Port1
Central Paddle	GND	GND

Logic Control Table

VC1	VC2	RFC-RF1	RFC-RF2
High	Low	On	Off
Low	High	Off	On

High = +1.8V to +5V

Low = +0V to +0.2V

For more information, please contact us at:

Sales Dept.

Tel: +886-2-2698-1022

e-mail: sales@rfintc.com

© 2006 RFIC Technology Corporation All rights reserved.

RFIC Technology Corp. reserved the right to make any changes to the specifications without notice.

Electrical Characteristics for 25 °C Ambient Temperature

Logic High = 3V; Logic Low = 0V; T_A = 25°C; unless otherwise noted.

Parameter	Specification			Units	Notes
	Min	Typ.	Max		
Insertion Loss (IL)		0.5	0.7	dB	DC – 1.0GHz
		0.6	0.8		1.0 – 3.0GHz
		0.7	1.0		3.0 – 5.0GHz
		0.65	0.8		2.4 – 2.5GHz
		1.2	1.4		4.9 – 5.9GHz
Isolation (ISO)	28	31		dB	DC – 1.0GHz
	27	31			1.0 – 3.0GHz
	29	32			3.0 – 5.0GHz
	29	31			2.4 – 2.5GHz
	28	30			4.9 – 5.9GHz
VSWR		1.4:1		dB	1.0 – 6.0GHz
IP1dB		36		dBm	1.0 – 6.0GHz, V _{High} =3V, V _{Low} =0V
		26			1.0 – 6.0GHz, V _{High} =1.8V, V _{Low} =0V
IIP3		55		dBm	1.0 – 6.0GHz, V _{High} =3V, V _{Low} =0V ΔF = 1 MHz, Pin=+15dBm/tone
Second Harmonic		75		dBc	DC – 1.0GHz 2fo @ Pout = 15dBm
		75			1.0 – 3.0GHz 2fo @ Pout = 15dBm
		74			2.4 – 2.5GHz 2fo @ Pout = 15dBm
Third Harmonic		85		dBc	DC – 1.0GHz 3fo @ Pout = 15dBm
		85			1.0 – 3.0GHz 3fo @ Pout = 15dBm
		80			2.4 – 2.5GHz 3fo @ Pout = 15dBm
Switching Speed T _{ON} /T _{OFF}		300		ns	50% control to 90% RF and 50% control to 10% RF
Control Current		5	10	uA	

Note: All measurements made in a 50 ohm system.

RFIC 2017.05 Update Rev1.5

Absolute Maximum Ratings

Parameter	Rating	Unit
Gate-Source Voltage (V_{GS})	+6	V
RF Input Power (under acceptable bias state, > 500MHz)	+38	dBm
Operating Ambient Temperature	-40 to +85	°C
Storage Temperature	-65 to +150	°C
Moisture Level	MSL1	
ESD Level	Class 1A HBM	

Important Note:





The information provided in this datasheet is deemed to be accurate and reliable only at present time. RFIC Technology Corp. reserves the right to make any changes to the specifications in this datasheet without prior notice.



Caution: ESD Sensitive
Appropriate precaution in handling, packaging And testing devices must be observed.

Typical Characteristic Chart

(RFC to RF1, RF2 (0, 2.7 V), TOP = +25°C)

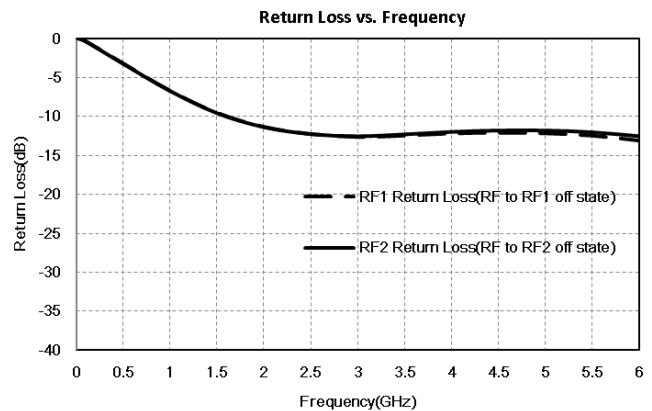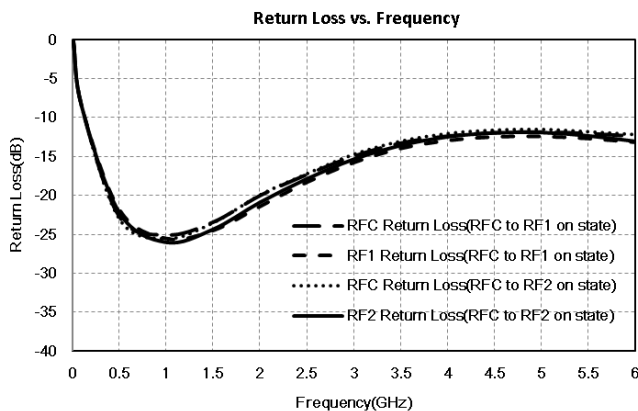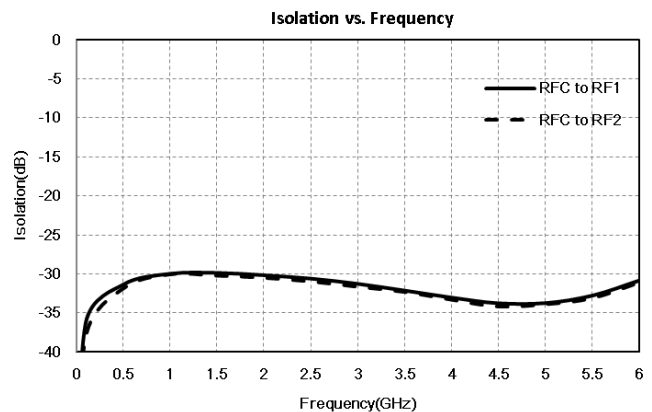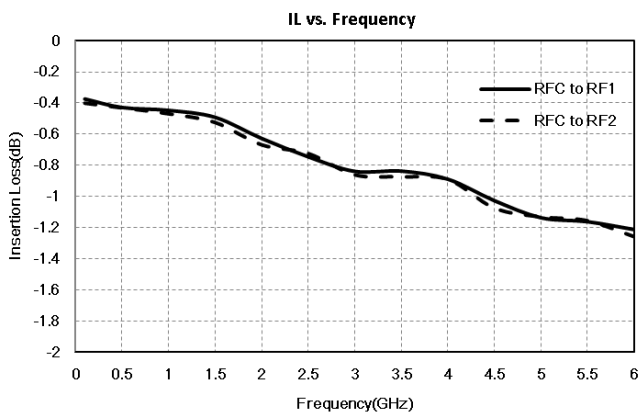

For more information, please contact us at:

Sales Dept.

Tel: +886-2-2698-1022


e-mail: sales@rfintc.com

© 2006 RFIC Technology Corporation All rights reserved.


RFIC Technology Corp. reserved the right to make any changes to the specifications without notice.

Package Outline


Top View

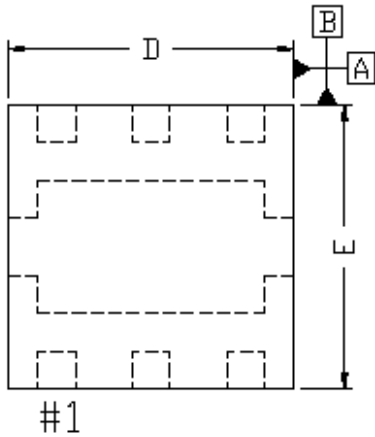

Bottom View

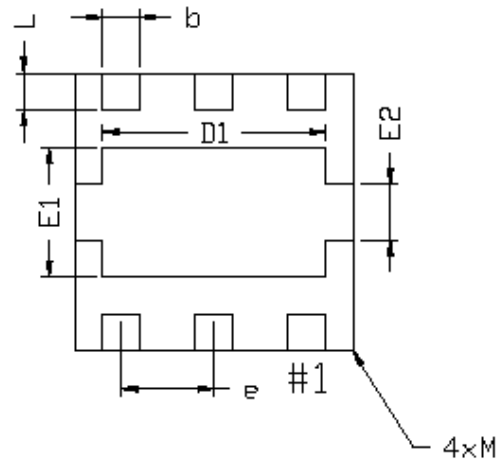


Side View

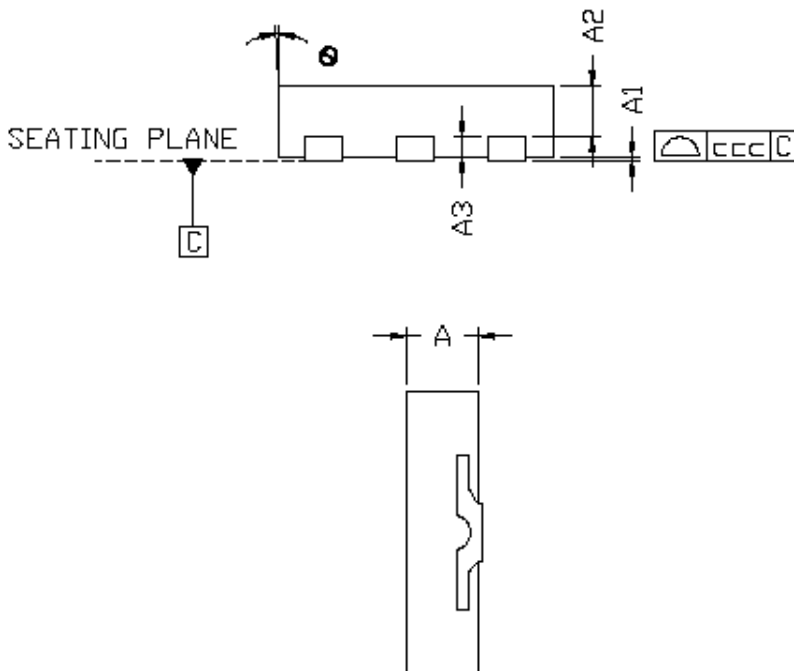


Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX
A	0.35	---	0.40
A1	0.00	---	0.05
A2	0.223	---	0.273
A3	---	0.127REF	---
b	0.15	0.20	0.25
D	1.45	1.50	1.55
D1	---	1.2BSC	---
E	1.45	1.50	1.55
E1	---	0.70BSC	---
E2	---	0.30BSC	---
e	---	0.50BSC	---
L	0.15	0.20	0.25
⌀	-12	---	0
ccc	---	0.08	---
M	---	---	0.05
Burr	0.00	0.03	0.06

Suggested PCB Layout

I/O Pin, Central PAD Layout

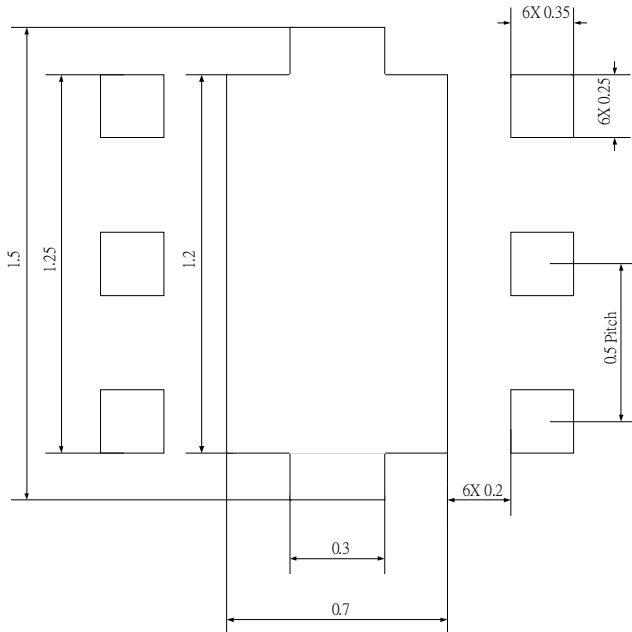


GND Via Layout

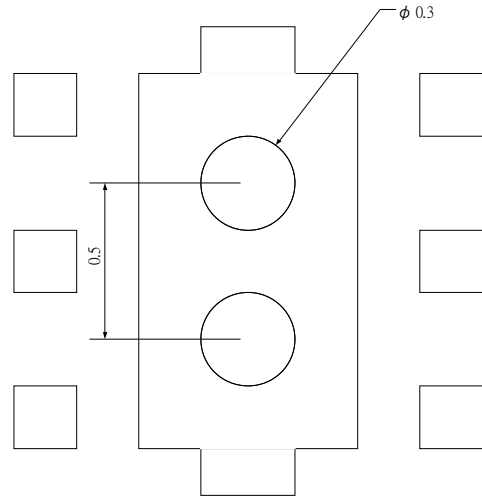

Unit : mm


RFIC 2017.05 Update Rev1.5

Packing

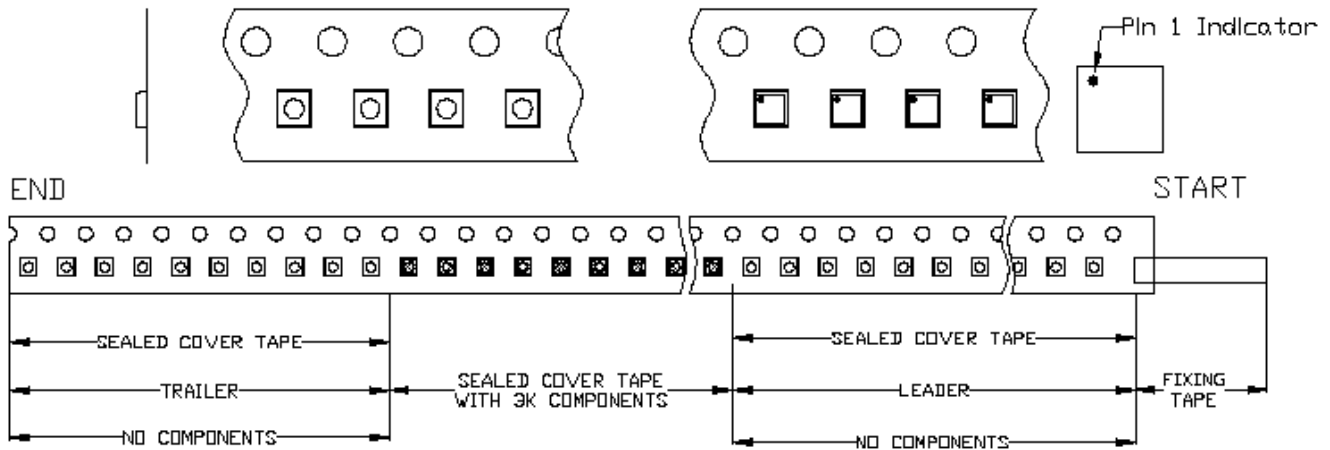

ITEM		SPECIFICATION (mm)(minimum)
LEADER	COVER TAPE WITH EMPTY CAVITIES	840(210格)
TRAILER	COVER TAPE WITH EMPTY CAVITIES	400(100格)
FIXING TAPE		100
PROTECTIVE BAND (t=1.0mm)		1200

PKG TYPE	Tape Width (mm)	Reel Size	Devices Per Reel
5X1X30W 1.5x1.5x0.55-0LJ	8	7"	3000

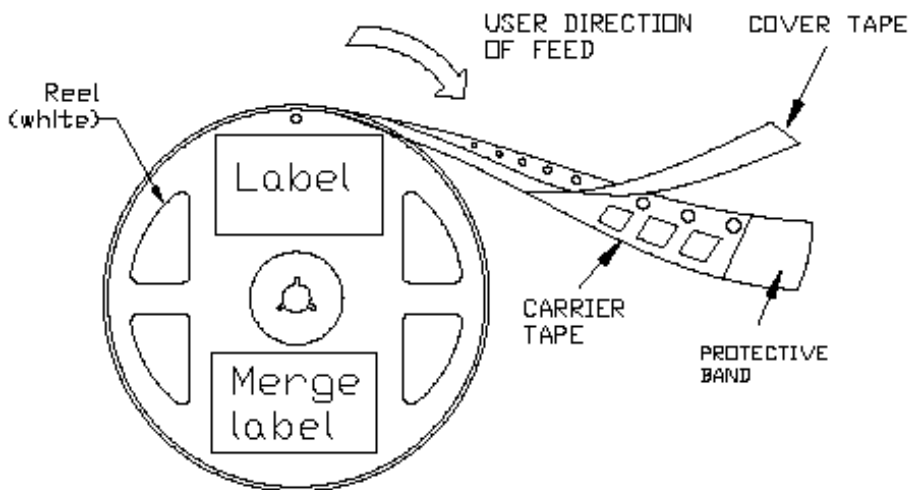

Part Number	Reel Size	Tape/Reel
SW470	7 inch	3000 PCS

SW470



RFIC 2017.05 Update Rev1.5

The product is designed and manufactured for consumer application only and is not intended for any application listed below which requires especially high reliability for the prevention of such defect which could lead to personal injury, death, physical or environmental damage.

- Aircraft equipment.
- Aerospace equipment.
- Undersea equipment.
- Medical equipment.
- Life-saving or life-sustaining applications
- Transportation equipment (vehicles, trains, ships, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Switch ICs](#) category:

Click to view products by [RFIC manufacturer](#):

Other Similar products are found below :

[MASW-007921-002SMB](#) [BGSA142GN12E6327XTSA1](#) [BGSA142MN12E6327XTSA1](#) [BGSA142M2N12E6327XTSA1](#) [MASW-004100-11930W](#) [MASW-008853-TR3000](#) [BGS13SN8E6327XTSA1](#) [BGSF18DM20E6327XUMA1](#) [BGSX210MA18E6327XTSA1](#) [BGSX212MA18E6327XTSA1](#) [SKY13446-374LF](#) [SW-227-PIN](#) [PE42524A-X](#) [CG2185X2](#) [CG2415M6](#) [MA4AGSW1A](#) [MA4AGSW2](#) [MA4AGSW3](#) [MA4AGSW5](#) [MA4SW210B-1](#) [MA4SW410](#) [MASW-002102-13580G](#) [BGS 12PL6 E6327](#) [BGS1414MN20E6327XTSA1](#) [BGS1515MN20E6327XTSA1](#) [BGSA11GN10E6327XTSA1](#) [BGSX28MA18E6327XTSA1](#) [HMC199AMS8](#) [HMC595AETR](#) [HMC986A](#) [SKY13374-397LF](#) [SKY13453-385LF](#) [CG2430X1-C2](#) [TGS2353-2-SM](#) [TGS4304](#) [UPG2162T5N-A](#) [CG2415M6-C2](#) [AS222-92LF](#) [SW-314-PIN](#) [UPG2162T5N-E2-A](#) [BGS18GA14E6327XTSA1](#) [MASWSS0204TR-3000](#) [MASWSS0201TR](#) [MASWSS0181TR-3000](#) [MASW-007588-TR3000](#) [MASW-007075-000100](#) [MASW-004103-13655P](#) [MASW-003102-13590G](#) [MASWSS0202TR-3000](#) [MASW-008543-TR3000](#)