
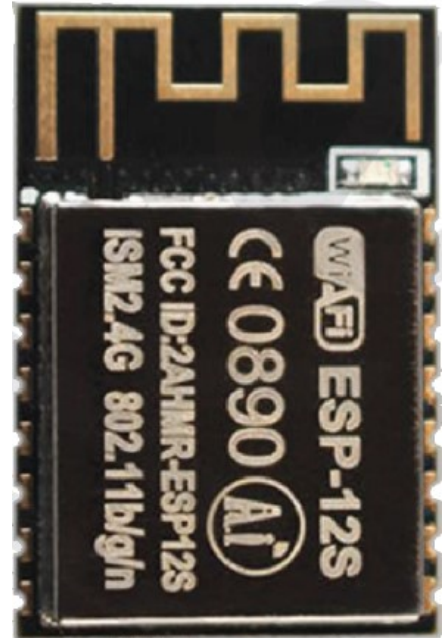


# ESP-12S 802.11 b/g/n Wi-Fi Module

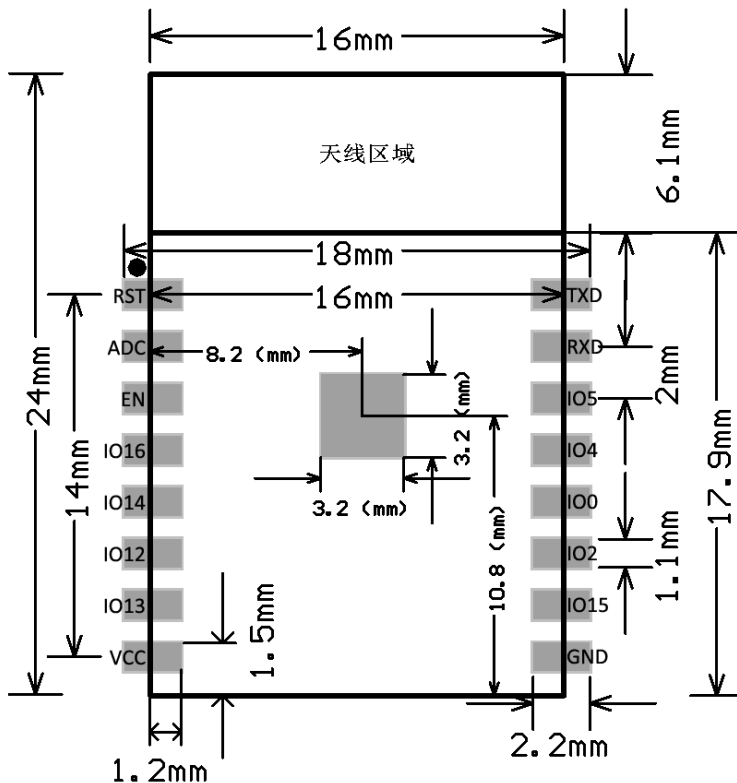

## Features

- The smallest 802.11b/g/n Wi-Fi SOC module
- Low power 32-bit CPU, can also serve as the application processor
- Up to 160MHz clock speed
- Built-in 10 bit high precision ADC
- Supports UART/HSPI/IIC/PWM/ADC
- SMD-16 package for easy welding
- Integrated Wi-Fi MAC/BB/RF/PA/LNA
- Deep sleep current as low as 20uA
- Embedded lwIP protocol stack
- Supports STA/AP/STA + AP operation mode
- Support Smart Config/AirKiss technology
- UART baudrate up to 4Mbps
- General AT commands can be used quickly
- Supports remote firmware upgrade (FOTA)

## Overview

ESP-12S has a highly competitive package size and ultra-low power technology.

ESP-12S can be widely used in a variety of networking, for home automation, industrial wireless control, baby monitors, wearable electronic products, wireless location sensing devices, wireless positioning system signals and other networking applications.

ESP-12S is packaged in SMD, through the standard SMT equipment to achieve rapid production of products, to provide customers with high reliability of the connection, especially for automation, large-scale, low-cost modern production methods. It's suitable for all kinds of Internet of Things hardware terminal occasions.

## Product Specifications

Module Model	ESP-12
Package	SMD-16
Size	24 x 16 x 3 (+/- 0.2)mm
SPI Flash	Default 32Mbit
Interface	UART/ HSPI/ IIC/ PWM/ ADC
IO Port	9
UART Baudrate	Support 300– 4608000 bps, Default 115200 bps
Frequency Range	2412– 2484MHz
Antenna	PCB antenna, 2 dBi
Transmit Power	802.11b: 16 +/- dBm (@11Mbps) 802.11g: 14 +/-2 dBm (@54Mbps) 802.11n: 13 +/- dBm (@HT20, MCS7)
Receiving Sensitivity	CCK, 1 Mbps: -90dBm CCK, 11Mbps: -85dBm 6 Mbps (1/2 BPSK): -88dB 54 Mbps (3/4 64-QAM): -70dBm
Power (Typical Values)	Continuous Transmission=> Avg: - 71mA, Peak: 300mA Modem Sleep: -20mA Light Sleep: -2mA Deep Sleep: -0.02mA
Security	WEP/WPA-PSK/WPA2-PSK
Power Supply	Voltage 3.0V– 3.6V, Current> 300mA
Operating Temperature	-20°C– 85°C
Storage Environment	-40°C– 90°C, <90%RH
Weight	0.45g
Certification	FCC. CE

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [WiFi Modules - 802.11](#) category:*

*Click to view products by [RF Solutions](#) manufacturer:*

Other Similar products are found below :

[KBPC10/15/2506WP](#) [SX-PCEAN2C-SP](#) [849WM520100E](#) [WIFI-AT2350](#) [7265.NGWG.SW](#) [HDG204-DN-3](#) [FXX-3061-MIX](#) [EMIO-1533-00A2](#) [7265.NGWWB.W](#) [PPC-WL-KIT02-R11](#) [RC-CC2640-B](#) [E70-433T14S](#) [WH-NB73-BA](#) [NF-02-PA](#) [EAR00364](#) [3168.NGWG](#) [MY-WF003U](#) [AX210.NGWG.NV](#) [ESP-15F32Mbit](#) [ESP32-S32Mb](#) [TG-01M](#) [ESP-13](#) [ESP-01F-2M](#) [ESP-01E-2M](#) [ESP-20](#) [ESP32-SL](#) [ESP-12K-PSRAM](#) [ESP-12K-PSRAM-IPEX](#) [ESP-12H](#) [BW18](#) [BW12-16Mb](#) [BW14](#) [BW15](#) [BW16](#) [TG-12F](#) [SIM7600CE-L1S](#) [CB3S\(tjrl\)](#) [CB3S\(hvk9\)](#) [CB3S\(qh6\)](#) [WB2S\(csyd\)](#) [WB3S\(ppty\)](#) [WB3S\(h238\)](#) [WB3S\(uvmz\)](#) [1005869](#) [1012](#) [QCA4004X-BL3B](#) [32-2006-BU](#) [WT51822-S4AT](#) [WT8266-S2](#) [DWM1000](#)