



THS 1.27mm PITCH

THS J-Hook Type

FEATURES

- Standard 0.05" integrated circuit pitch.
- Smaller size makes better heat convection during PC board wave soldering.
- Top tape sealed to withstand wave soldering, board washing.
- All plastics are UL 94V-0 grade fire retardant.
- Gold plated contact to ensure low contact resistance and long mechanical life.
- RoHS Compliant

APPLICATIONS


- Hand-held electronic devices, such as PDA, MP3, radios
- Portable computer and electronic devices, such as notebook, computers
- Instrumentation and industrial control products, such as CDROM, coin changers

■ SPECIFICATIONS

1.ELECTRICAL

Contact rating	switching	25mA, 24VDC	
	non-switching	100mA	
Contact resistance		100mΩ Max.	
Insulation resistance		500MΩ Min. at 100VDC	
Dielectric strength		300VAC Min. for 60 seconds	
Capacitance between adjacent switches 5pF Max.			






HALF PITCH SMT TYPE, THE LOWEST PROFILE DIP SWITCH

2.MECHANICAL and ENVIRONMENTAL

Temperature rating	operation	-25°C to +70°C
	storage	-40°C to +85°C
Operation force		800g Max.
Mechanical life		1000 operations
Humidity		95% RH, 40℃ for 96Hrs.
Vibration		10Hz-55Hz-10Hz for 6Hrs.
Reflow soldering heart for SMT type (reference only)		240°C for 20 seconds or less, peak temperature 260°C or less Max. 260°C 240°C 150°C 120-150 sec 20 sec Max. Time (sec)

■ PART NUMBERING SYSTEM

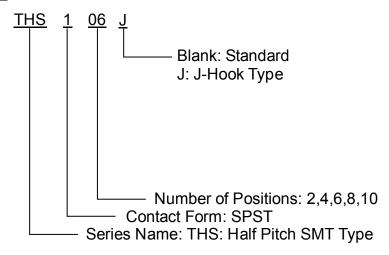




Detect





■ CONSTRUCTION

THS




THS1XX

OPTIONS

1. Special marking and case color available



THS J TYPE

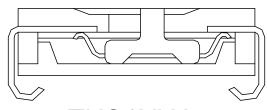


THS1XXJ

2.Top Tape Sealed



PACKAGING

1.Tape & Reel Packaging (Per EIA STANDARD)

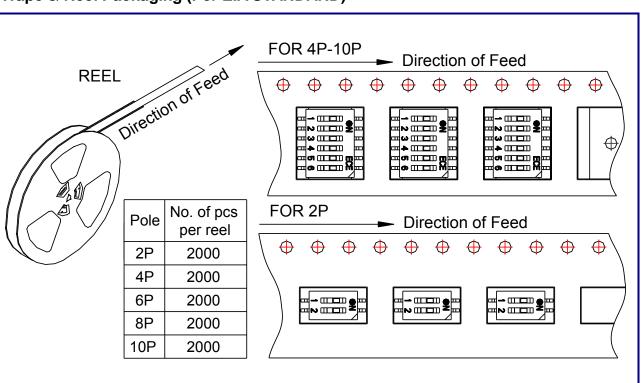







HALF PITCH SMT TYPE, THE LOWEST PROFILE DIP SWITCH

■ DIMENSIONS AND CIRCUITRY

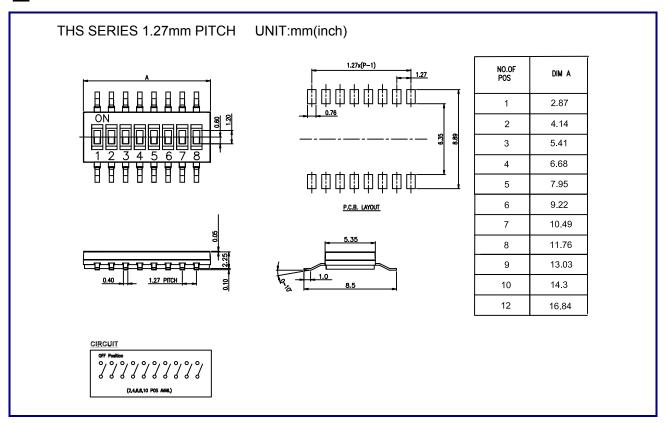

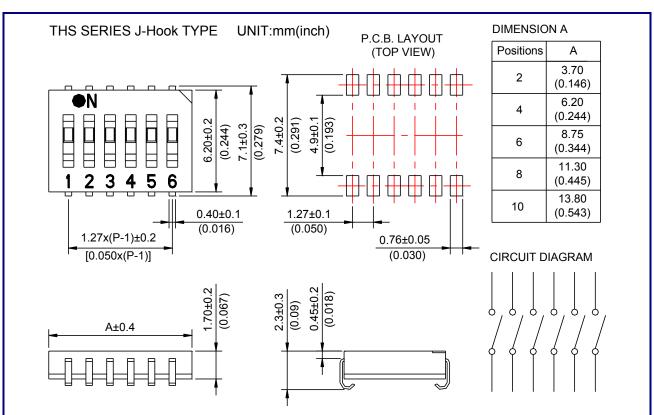





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for DIP Switches/SIP Switches category:

Click to view products by ROCPU Technology manufacturer:

Other Similar products are found below:

79B10T 8136-475G4T G7G-1A2-CB-DC12 H7CZL8AC100240 DRR60016 DRS4016 1825444-1 200183 206002 206004LPST 219-6LPSTRF 25.350.0653.0 SBS 5004 TG SDA10H1BDA 97R06ST A2C-2A5 1825444-7 ADE08SA04 ADE12S04 192960010 206005RAS 206007 2-1825058-8 25.330.0653.1 25.352.0353.0 CXDRIVEV2X IKN0600000 IKN0800000 LA2-002-DC24 DBS2110 DSR02T DSS 208 N E2FMX2D1M1TGJ03M NDI10H 219-9MSTP EPM02FV 206010RAST NDS08V 76SB05 TD06H0SK1 Z7.255.9027.0 1-1825058-3 1825428-4 219-10LPSTF E3ZG6111D03M G4D212PUSTV2DC5 HARW0002 EPG301BT06 219-7LPSTRF 1-1825058-6