

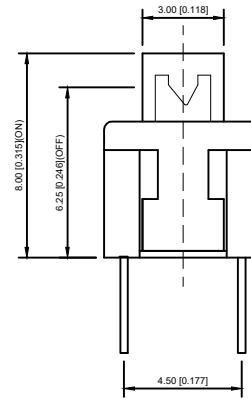


向视图

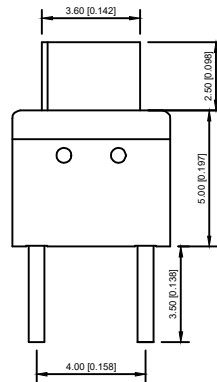

P.C.B LAYOUT  
TOP VIEW

SPECIFICATIONS 规格

POLE-POSITION 杆位:SPDT, DPDT

CONTACT RATING 触点额定值:12 VDC, 50 mA

CONTACT RESISTANCE 接触电阻:100 mΩ MAX.1.5 V DC;100 mA,  
by Method of Voltage DROP

INSULATION RESISTANCE 绝缘电阻:100 MΩ MIN.500 V DC for 1 minute

DIELECTRIC STRENGTH 耐电压:Breakdown is not Allowable;  
500 V AC for 1 Minute

OPERATING FORCE 操作力:250±50 gf

OPERATING LIFE 工作寿命:50,000 cycles

OPERATING TEMPERATURE RANGE 工作温度范围:-20°C~70°C

TOTAL TRAVEL/OPERATING TRAVEL 总行程/运行行程:2+0.3 mm/1.3±0.3mm

A4			
A3			
A2			
A1			
REV	DATE	REVISION DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP-0103-4
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [ROCPU Technology](#) manufacturer:*

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [01-153.025](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE](#)  
[01A](#) [MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)  
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#) [A2PMA1X03EC56](#) [A3A-7310](#) [A3A-](#)  
[7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#) [1211500044](#) [121194](#) [1212MRA](#)  
[1232A6NF](#) [121489](#) [1223A2ULCSA](#) [D5P-MT4](#) [13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#) [AH165-TGFY22](#) [AH165-](#)  
[TGL5Y11E3](#) [AH165-TGLR11AA3](#)