


Description

RSFP2416E is a Wi-Fi band filter, which is designed with Film Bulk Acoustic Resonator (FBAR) technology. The product can provide low insertion loss and steep skirt to enables coexistence of Wi-Fi and LTE signals within the same device or in close proximity to one another. The typical insertion loss in the pass band is less than 1.4dB. Typical rejection at the LTE Band 38 and LTE Band 7 and 41 is more than 42dB, at the LTE Band 40 is more than 41dB.

For the chip package, the RSFP2416E uses advanced module packing techniques to achieve the industry standard 1.1x0.9x0.6mm footprint, include bumping and flip chip.



Functional Block Diagram

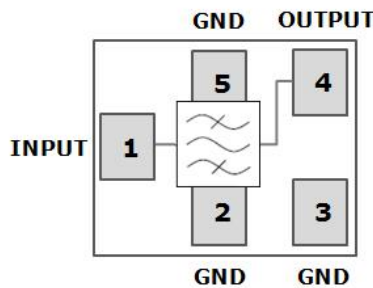

Pin Connection

No.	Function
1	Input
4	Output
2,3,5	Ground

Features

- For Wi-Fi - LTE coexistence application
- Plastic Chip Scale Package(CSP)
- Miniature Size: 1.1mm x 0.9 mm x 0.6 mm
- Fast Roll-off from Wi-Fi to near LTE Bands
- High Rejection at LTE bands.
- Low Temperature Coefficient of Frequency
- Storage temperature range: -40 to +150 °C
- Excellent ESD protection ability: Class 1C
- Moisture Sensitivity : MSL3

Applications

- Wi-Fi bandpass filter enables the coexistence of (LTE/TD-LTE) & Wi-Fi
- ISM band applications such as Smart Meters
- Portable Hotspots and Mobile Routers

Environmental

- Full implement with RoHS compliant
- Lead Free (Pb free)



Electrical Specifications

Parameter(Operable Temperature:-25 to +85°C)	Min	Typ ⁽¹⁾	Max	Unit
Insertion Loss (2402.5 ~ 2421.5 MHz)	\	1.3	2.5	dB
Insertion Loss (2407.5 ~ 2476.5 MHz)	\	1.1	2.1	dB
Insertion Loss (2462.5 ~ 2481.5 MHz)	\	1.4	2.5	dB
Ripple (2402.5 ~ 2421.5 MHz)	\	0.6	1.0	dB
Ripple (2407.5 ~ 2476.5 MHz)	\	0.6	1.0	dB
Ripple (2462.5 ~ 2481.5 MHz)	\	0.8	1.2	dB
VSWR (2402.5 ~ 2481.5 MHz)	\	1.2	1.7	\
Absolute Attenuation			\	
800 ~ 2000 MHz	32	37	\	dB
2000 ~ 2170 MHz	22	35	\	dB
2300 ~ 2370 MHz	45	53	\	dB
2370 ~ 2375 MHz	45	50	\	dB
2375 ~ 2380 MHz	5	41	\	dB
2500 ~ 2505 MHz	18	61	\	dB
2505 ~ 2570 MHz	46	60	\	dB
2570 ~ 2620 MHz	39	43	\	dB
2620 ~ 2690 MHz	38	41	\	dB
4800 ~ 5805 MHz	40	43	\	dB
RF Input Power ⁽²⁾ (2402.5 ~ 2481.5 MHz)	\	\	28	dBm

(1) **Typ Data** is the integrated value of the linear S-parameter over indicated band.

(2) Input power applied for a minimum of 5,000 hrs at 55°C in the specified frequency band

Typical Performance at Tc=25 °C

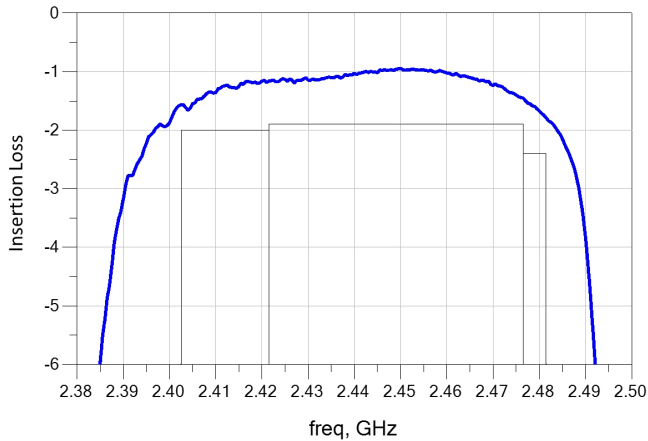


Figure.1 Passband Insertion Loss

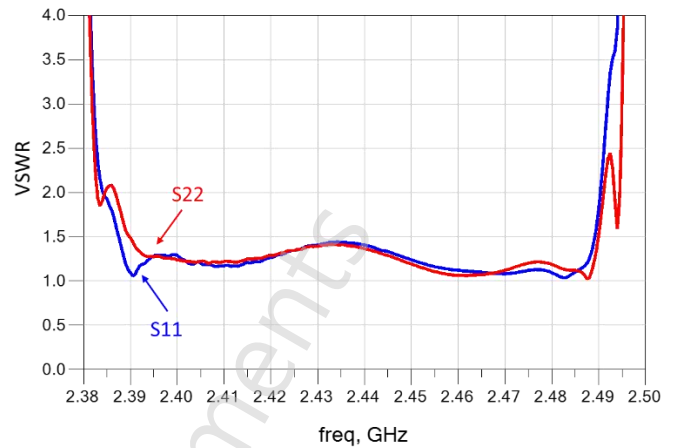


Figure.2 VSWR

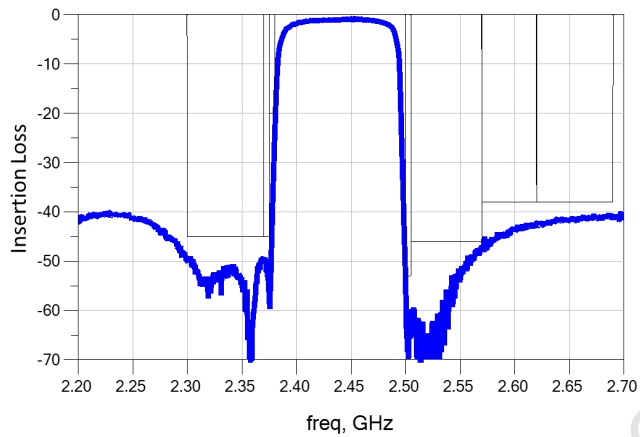


Figure.3 Narrowband Insertion Loss



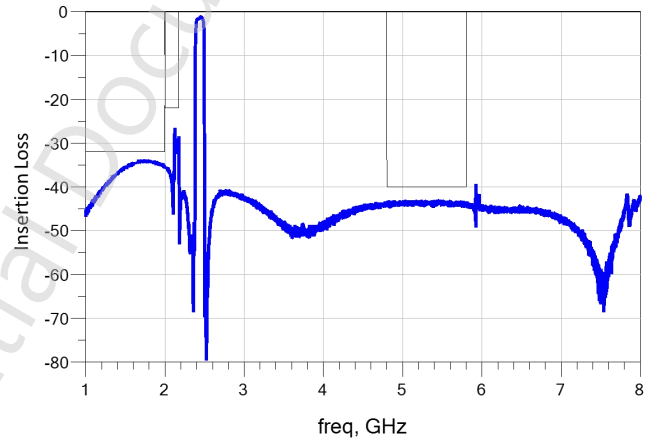


Figure.4 Wideband Insertion Loss

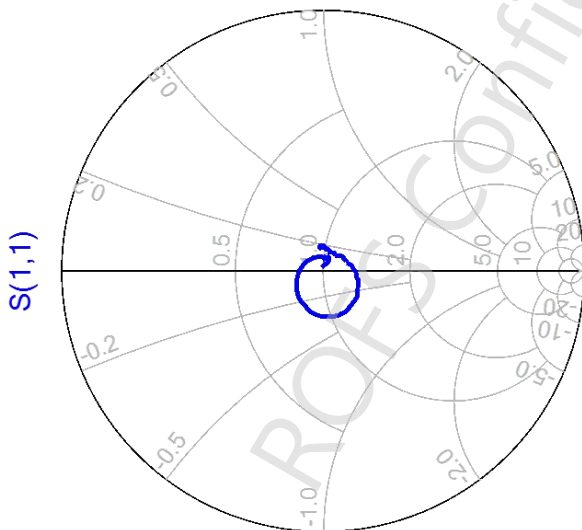

freq (2.402GHz to 2.482GHz)


Figure.5 Input Smith Chart S11

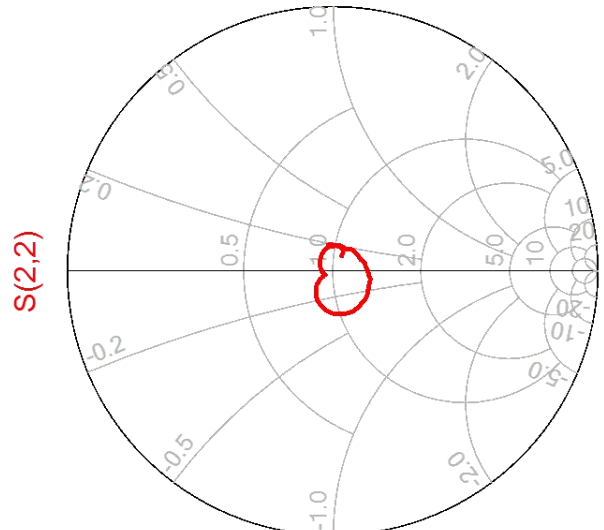

freq (2.402GHz to 2.482GHz)

Figure.6 Output Smith Chart S22

Package Outline Drawing

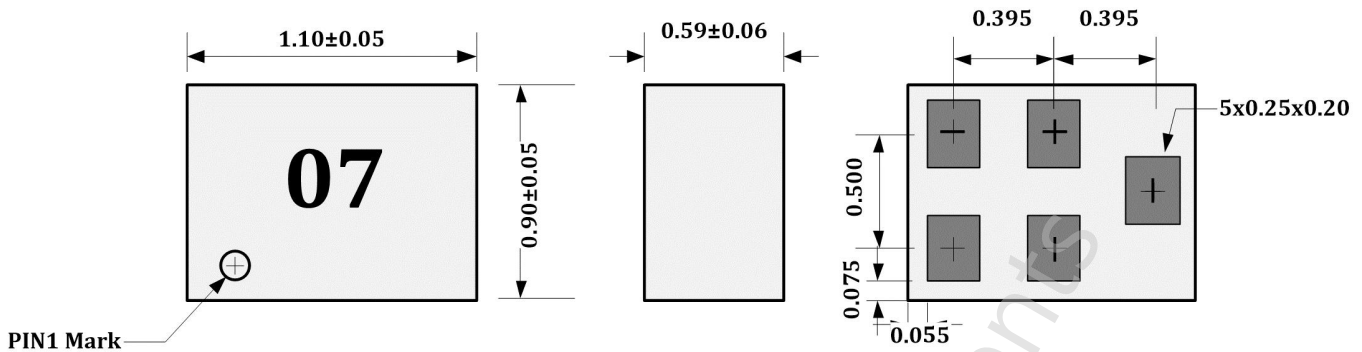


Notes:

1. Dimension: mm
2. Dimensions nominal unless otherwise noted
3. Contact area are gold plated
4. Pad(1) to (5) are same size
5. XX is ROFS inside code

Pin Connection:

- | | |
|-------|--------|
| 1 | Input |
| 4 | Output |
| 2,3,5 | Ground |


Test Circuit

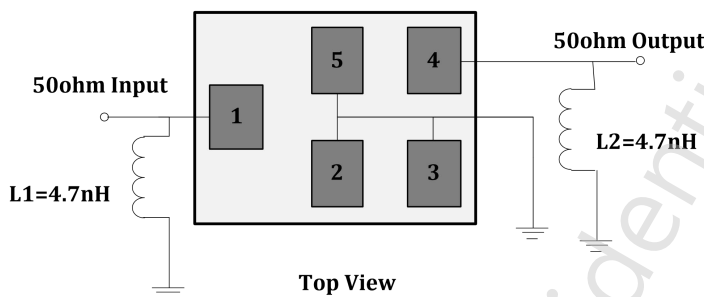

Notes:

1. Matching component values shown are ROFS evaluation board results, please adjust component values by the actual use environment.

PCB Footprint

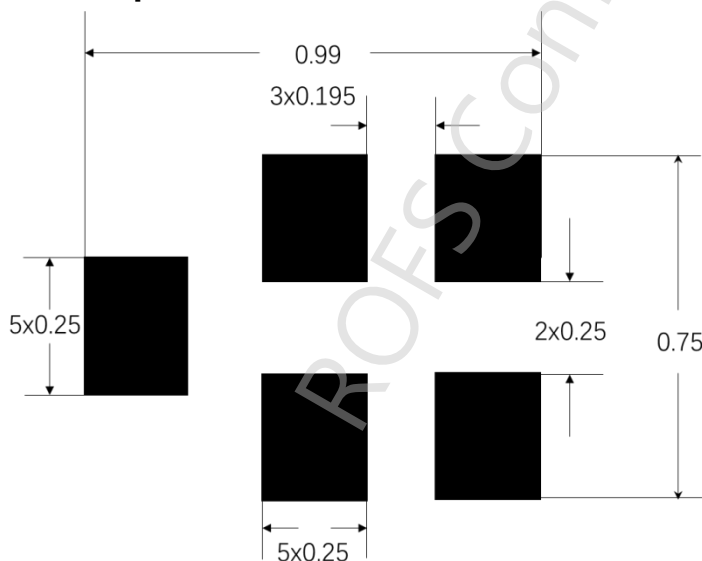


Notes:


1. Black indicates metallized area.
2. This footprint represents a recommendation only, some modification may be necessary to suit end user assembly materials and processes.
3. For solder pad recommendation see mechanical information.
4. Dimensions shown are nominal in millimeters.

Packing

1. Tape Dimension

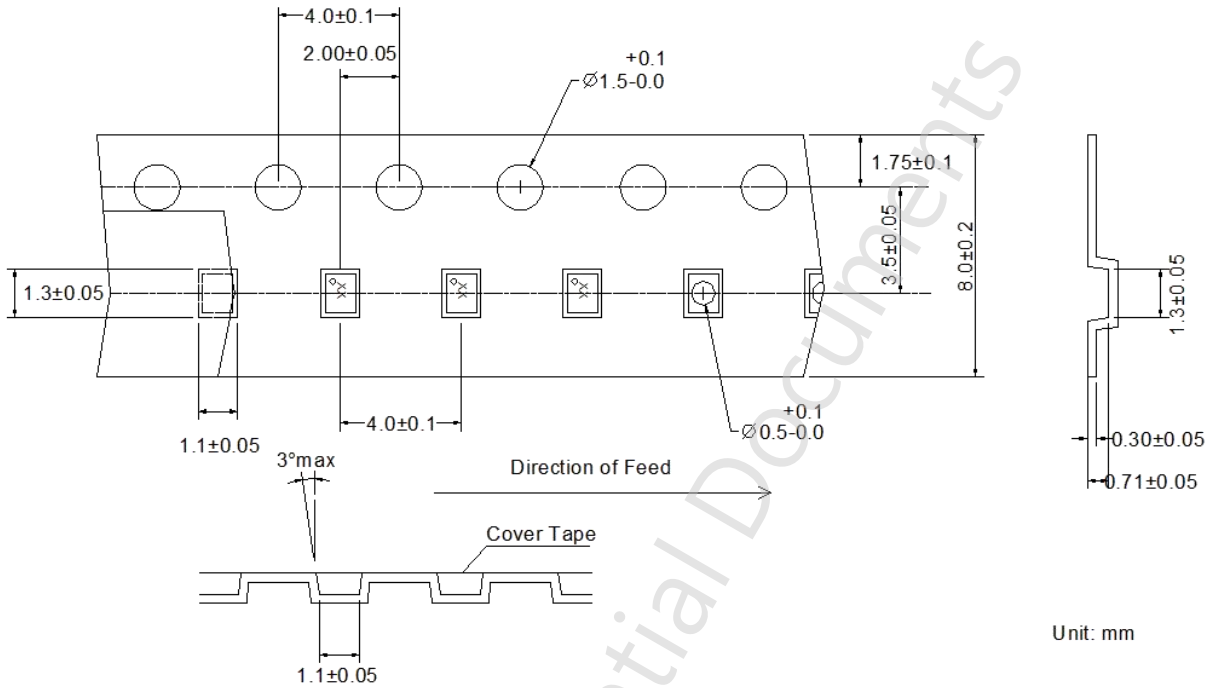


2. Reel Dimension

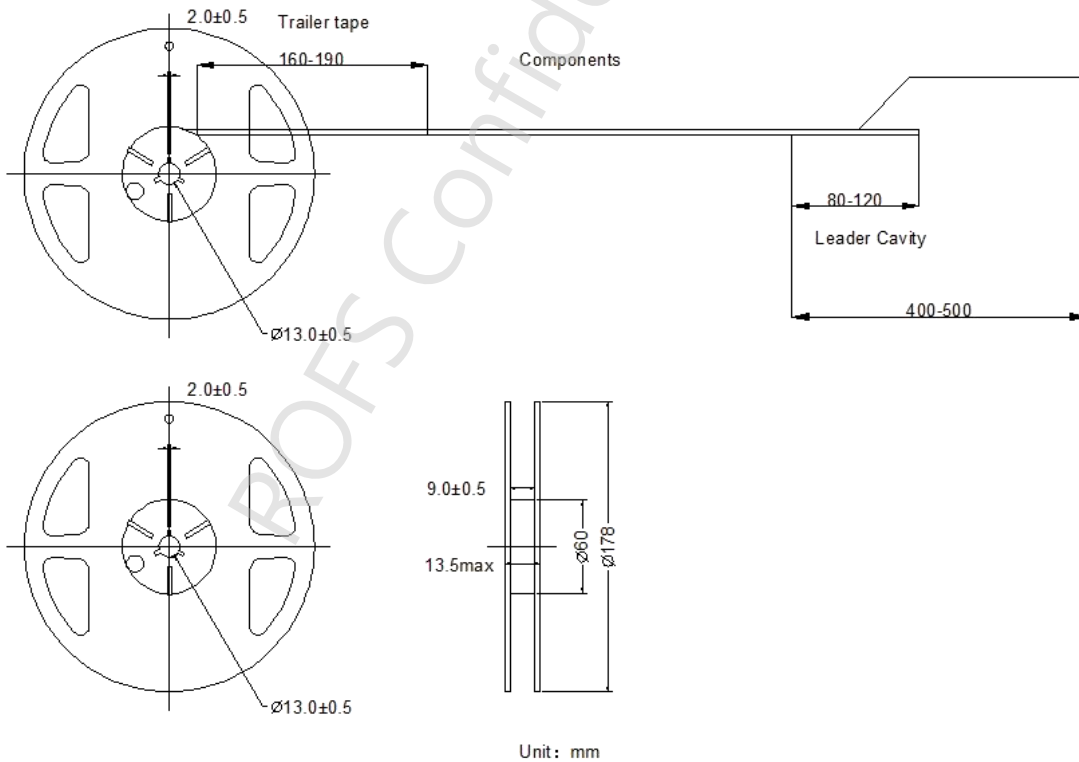

5000Pcs/Reel

Recommended IR Reflow Profile

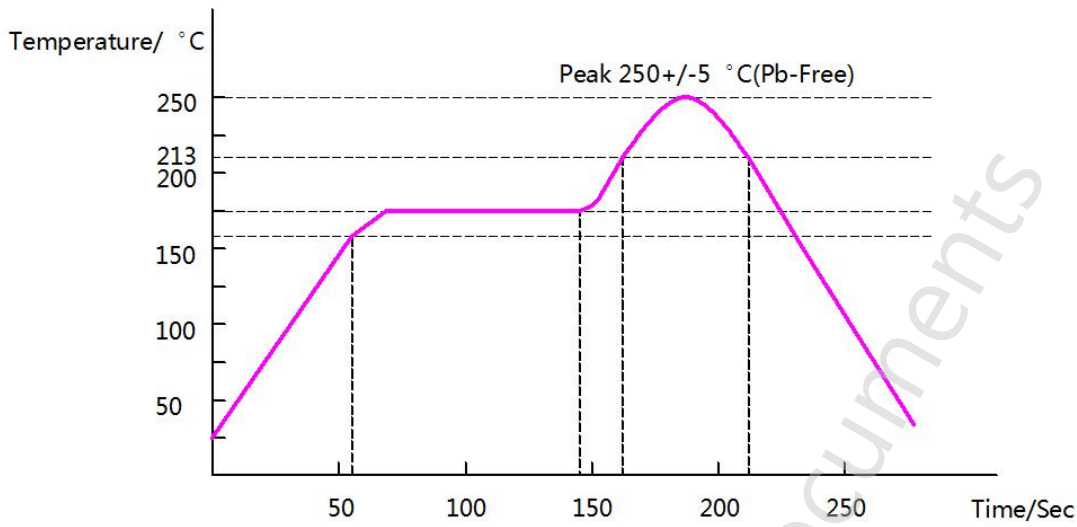

Order Information

Part Number	Qty Per Reel	Container
RSFP2416E	5000	7 inch Reel

For more information, please contact: sales@rofsmicro.com

Notes:

The specification may be changed or the product had been discontinued, please check with our sales or product engineer before order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [ROFS](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [1A0220-3](#) [JP510S](#)

[LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [AFS1575.42S4-T](#) [FM-104-PIN](#) [CER0813B](#)

[MAPDCC0005](#) [3A325](#) [40287](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [JHS-115-PIN](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [43020](#)

[LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [RF1353C](#)

[051157-0000](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)

[BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DSS-113-PIN](#) [DS-327-PIN](#) [MACP-008125-CK07F0](#) [DS-329-PIN](#)