

1SR154-400

Diode, rectifying, surface mount

These diodes are suitable for high density surface mounting on printed circuit boards.


Features

- available in PMDS (PSM) package

Applications

- rectifying
- surge absorption

Dimensions (Units : mm)

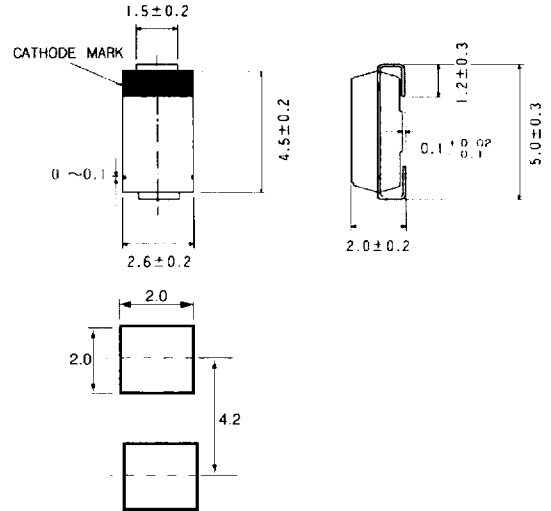

Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit	Conditions
Absolute peak reverse voltage	V_{RSM}	500	V	
Peak reverse voltage	V_{RM}	400	V	
Mean rectifying current	I_O	1.0	A	When mounted on an alumina PCB
Peak forward surge current	I_{FSM}	30	A	60 Hz for 1 cycle
Junction temperature	T_j	175	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 ~ +175	$^\circ\text{C}$	

Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min	Typical	Max	Unit	Conditions
Forward voltage	V_F		0.95	1.1	V	$I_F = 1.0 \text{ A}$
Reverse current	I_R		30	100	nA	$V_R = 400 \text{ V}$

Electrical characteristic curves

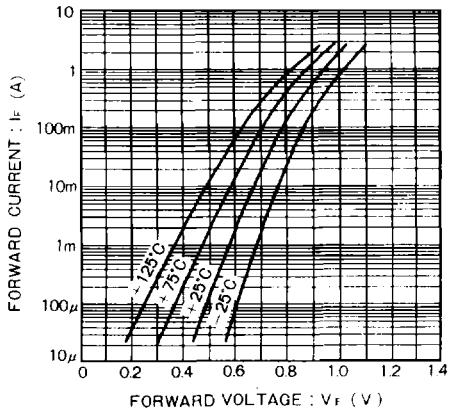


Figure 1

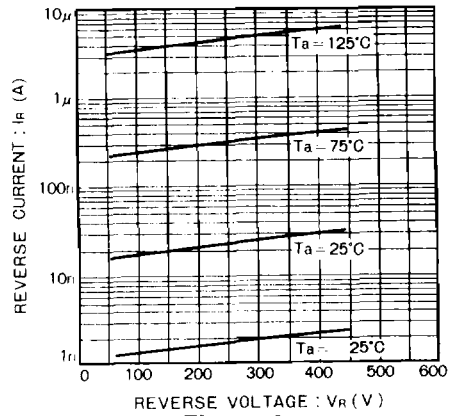


Figure 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [ROHM manufacturer](#):

Other Similar products are found below :

[RD0306T-H](#) [BAQ33-GS18](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE525](#) [NTE571](#) [NTE574](#) [NTE5804](#) [NTE5806](#) [NTE6244](#)
[1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#)
[1N914BTR](#) [RFUH20TB3S](#) [BAS 28 E6327](#) [BAV199-TP](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#)
[JAN1N3600](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [SP000010217](#) [ACDSW4448-HF](#) [CDSZC01100-HF](#)
[BAV199E6433HTMA1](#) [BAV70M3T5G](#) [SMBT2001T1G](#) [NTE5801](#) [NTE5800](#) [NTE5808](#) [NTE6240](#) [NTE6248](#) [DLM10C-AT1](#) [BAS28-7](#)