

Input Voltage 5.0V to 35V Output Switch Current 2A 1ch Step-Down DC/DC Converter

BD9060HFP-C BD9060F-C

General Description

The BD9060HFP-C BD9060F-C are high-accuracy frequency-flexible step-down switching regulators with built-in POWER MOS FET which can withstand high pressure. The operational frequency is freely configurable with external resistance. It features a wide input voltage range (5V to 35V) and a high frequency accuracy of ±5% (f=200kHz to 500kHz). Furthermore, an external synchronization input pin enables synchronous operation with external clock. The output capacitor corresponds to the ceramic capacitor.

Features

- Minimal external components
- P-ch POWER MOS FET included in the package
- Low dropout:100% ON duty cycle
- External synchronization enabled
- Soft start function: soft start time fixed to 2.7ms (Typ)
- Built-in overcurrent protection circuit
- Built-in thermal shutdown protection circuit

Applications

Battery-powered in-vehicle unit (Cluster, Car multimedia, etc.), communication such as ETC, all fields of industrial equipment, Flat TV, Printer, DVD, AV, OA

Key Specifications

■ Input Voltage Range: 5V to 35V■ Output Voltage Range: 0.8V to VINV

Output Switch Current: 2 A (Max)

■ Selectable Oscillating Frequency:50kHz to 500kHz

■ Oscillating Frequency Accuracy: ±5% (f=200kHz to 500kHz)

(I=ZUUKIIZ (U SUUKIIZ)

■ POWER MOS FET On Resistance: 0.6Ω(Max)
 ■ Reference Voltage Accuracy: ±2% (Typ)

■ Standby Circuit Current: 0 µA (Typ)
■ Operating Temperature Range: -40°C to +125°C

■ AEC-Q100 Qualified

Package W(Typ) x D(Typ) x H(Max)


HRP7 9.395mm x **1**0.540mm x 2.005mm



SOP8 5.00mm x 6.20mm x 1.71mm




Typical Application Circuit

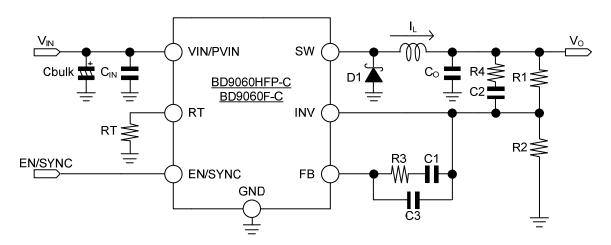


OProduct structure: Silicon monolithic integrated circuit OThis product has no designed protection against radioactive rays

Block Diagram, Pin Configuration, Pin Description


(BD9060HFP-C)

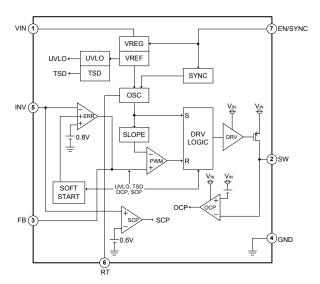




| Pin No. | Pin Name | Function |
|---------|----------|---------------------------------------|
| 1 | VIN | Power supply input |
| 2 | SW | Output |
| 3 | FB | Error Amp output |
| 4 | GND | Ground |
| 5 | INV | Output cottage feedback |
| 6 | RT | Frequency setting resistor connection |
| 7 | EN/SYNC | Enable/Synchronizing pulse input |
| FIN | - | Ground |

(BD9060F-C)

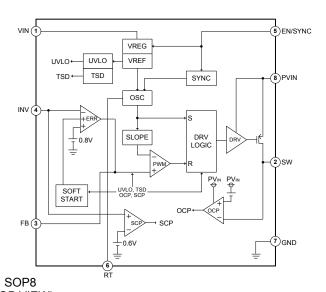



| Pin No. | Pin Name | |
|---------|----------|---------------------------------------|
| 1 | VIN | Power supply input ^(Note1) |
| 2 | SW | Output |
| 3 | FB | Error Amp output |
| 4 | INV | Output cottage feedback |
| 5 | EN/SYNC | Enable/Synchronizing pulse input |
| 6 | RT | Frequency setting resistor connection |
| 7 | GND | Ground |
| 8 | PVIN | Power supply input ^(Note1) |

(Note 1) PVIN and VIN are shorted

Description of Blocks

ERR(Error Amp)

The Error Amp block is an error amplifier used to input the reference voltage (0.8V (Typ)) and the INV pin voltage. The output FB pin controls the switching duty and output voltage Vo. These INV and FB pins are externally mounted to facilitate phase compensation. Inserting a capacitor and resistor between these pins enables adjustment of phase margin. (Refer to recommended examples on P. 15 to 17)

SOFT START

The SOFT START block provides a function to prevent the overshoot of the output voltage Vo through gradually increasing the normal rotation input of the error amplifier when power supply turns ON to gradually increase the switching duty. The soft start time is set to 2.7ms (Typ).

· SYNC(EN/SYNC)

By making the "EN/SYNC" terminal less than 0.8V, the circuit can be shut down. Furthermore, by applying higher frequency pulse than the configured oscillation frequency to the "EN/SYNC" pin, external synchronization is possible. Frequency range of external synchronization is $F_{OSC} \times 1.05 \le F_{sync} \le 500 \text{kHz}$ and 1.5 times of the set frequency. (Refer to P.11)

OSC (Oscillator)

This circuit generates the pulse wave to be inputted to the SLOPE, and by connecting a resistor to the "RT", 50kHz to 500kHz oscillating frequency can be configured. (Refer to P.15 Figure 23)

SLOPE

This block generates sawtooth waves from the clock generated by the OSC. The generated sawtooth waves are sent to PWM.

• PWM

The PWM Comparator block is a comparator to make comparison between the FB pin and internal sawtooth wave and outputs a switching pulse. The switching pulse duty varies with the FB value. (Min Duty width: 250ns)

TSD (Thermal Shutdown)

In order to prevent thermal destruction/thermal runway of the IC, the TSD block will turn OFF the output when the chip temperature reaches approximately 150°C or more. When the chip temperature falls to a specified level, the output will be reset. However, since the TSD is designed to protect the IC, the chip junction temperature should be provided with the thermal shutdown detection temperature of less than approximately.150°C.

OCP (Over Current Protection)

While the output POWER P-ch MOS FET is ON, if the voltage between drain and source (on-resistancexload current) exceeds the reference voltage internally set with the IC, OCP will start up. This OCP is a self-return type. If OCP operates, the duty will be small, and output voltage will decrease. However, this protection circuit is only effective in preventing destruction from sudden accident. It does not support for continuous operation of the protection circuit (e.g. if a load, which significantly exceeds the output current capacitance, is normally connected). Furthermore, since the overcurrent protection detection value has negative temperature characteristics, consider thermal design.

SCP (Short Current Protection)

While OCP operates, and if the output voltage falls below 70%, SCP will start up. If SCP operates, the output will be turned OFF after a period of 1024 pulse. It extends the output OFF time to reduce the average output current. In addition, during power start-up, this feature is masked until it reaches the set output voltage to prevent wrong trigger of SCP.

UVLO (Under Voltage Lock-Out)

UVLO is a protection circuit for low voltage malfunction. It prevents malfunction of the internal circuit at the time of sudden rise and fall of power supply voltage. It monitors the $V_{\rm IN}$ powersupply voltage and internal regulator voltage. If $V_{\rm IN}$ is less than 4.3V (Typ), Pch POWER MOS FET output is OFF. This threshold voltage has a hysteresis of 200mV (Typ). If $V_{\rm IN}$ is more than 4.5V (Typ) , UVLO will be released and the soft start circuit will be restarted.

DRV (Driver)

This is a driver circuit for driving the gate electrode of the Pch POWER MOS FET output. By switching the driving voltage when the power supply voltage drop, it reduces the deterioration of POWER MOS FET on-resistance. It monitors the V_{IN} power supply voltage and internal regulator voltage. If V_{IN} is less than 7.5V (Typ), the driving voltage is switched. This threshold voltage has a hysteresis of 1.5V (Typ).

Absolute Maximum Ratings(Ta=25°C)

| Parameter | | Symbol | Limits | Unit |
|------------------------------|------|------------------------------------|--------------------------|------|
| Power Supply Voltage | | V _{IN} , PV _{IN} | 42 | V |
| Output Switch Pin Voltage | | V _{SW} | V _{IN} | V |
| Output Switch Current | | I _{SW} | 4 ^(Note 1) | Α |
| EN/SYNC Pin Voltage | | V _{EN/SYNC} | V _{IN} | V |
| RT,FB,INV Pin Voltage | | V_{RT}, V_{FB}, V_{INV} | 7 | V |
| | HRP7 | Pd | 5.51 ^(Note 2) | W |
| Power Dissipation SOP8 | | Pd | 0.69 ^(Note 3) | W |
| Storage Temperature Range | | Tstg | -55 to +150 | °C |
| Maximum Junction Temperature | | Tjmax | 150 | °C |

⁽Note 1) Pd should not be exceeded.

Caution: Operating the IC over the absolute maximum ratings may damage the IC. In addition, it is impossible to predict all destructive situations such as short-circuit modes, open circuit modes, etc. Therefore, it is important to consider circuit protection measures, like adding a fuse, in case the IC is operated in a special mode exceeding the absolute maximum ratings.

Recommended Operating Conditions

| Parameter | Symbol | Limits | Unit |
|--------------------------------------|------------------------------------|---|------|
| Operating Power Supply Voltage | V _{IN} , PV _{IN} | 5 to 35 | V |
| Operating Temperature Range | Topr | -40 to +125 | °C |
| Output Switch Current | I _{SW} | to 2 | Α |
| Output Voltage (min pulse width) | PW _{MIN} | 250 | ns |
| Oscillating Frequency | fosc | 50 to 500 | kHz |
| Oscillating Frequency Set Resistance | RT | 27 to 360 | kΩ |
| External Sync Frequency | f _{SYNC} | F _{OSC} x 1.05 ≤F _{sync} ≤F _{OSC} x 1.5 (Note 1) | kHz |

(Note 1) It should be configured at less than 500kHz.

⁽Note 2) Reduce by 44mW/°C,when mounted on 2-layerPCB of 70mmx70mmx16mm (PCB incorporates thermal via. Copper foil area on the reverse side of PCB: 10.5mmx10.5mm Copper foil area on the reverse side of PCB: 70mmx70mm).

⁽Note 3) Reduce by $5.52 \text{mW}/^{\circ}\text{C}$, when mounted on 1-layerPCB of 70mm x70mm x1.6mm

Electrical Characteristics (Unless otherwise specified, Ta=- 40°C to +125°C, V_{IN}=13.2V,V_{EN/SYNC} =5V)

| trical Characteristics(Unles | | Guaranteed Limit | | | | |
|--|-----------------------|------------------|-------|-------|------|---|
| Parameter | Symbol | Min | Тур | Max | Unit | Conditions |
| Standby Circuit Current | I _{STB} | _ | 0 | 5 | μA | V _{EN/SYNC} =0V, Ta=-40°Cto +105°C |
| Circuit Current | Icc | _ | 3.7 | 8.0 | mA | I_{OUT} =0A, RT=51k Ω , V_{INV} =0.7V |
| SW Block | | | | | | |
| POWER MOS FET ON Resistance | R _{ON} | _ | 0.3 | 0.6 | Ω | |
| Operating Output Switch Current Of Overcurrent Protection (Note 1) | I _{LIMIT} | 2.5 | 4 | _ | А | |
| Output Leak Current | I _{OLEAK} | _ | 0 | 5 | μA | V _{IN} =35V, V _{EN/SYNC} =0V, Ta=-40°C to +105°C |
| Error Amp Block | | | | | | |
| Reference Voltage 1 | V _{REF} 1 | 0.784 | 0.800 | 0.816 | V | V _{FB} = V _{INV} |
| Reference Voltage 2 | V _{REF} 2 | 0.780 | 0.800 | 0.820 | V | V_{FB} = V_{INV} , V_{IN} =5V to 35V |
| Reference Voltage Input Regulation | ΔV_{REF} | _ | 0.5 | _ | % | V _{IN} =5V to 35V |
| Input Bias Current | I _B | -1 | _ | _ | μA | V _{INV} =0.6V |
| Maximum FB Voltage | V_{FBH} | 2.0 | 2.5 | _ | V | V _{INV} =0V |
| Minimum FB Voltage | V_{FBL} | _ | 0.51 | 0.80 | V | V _{INV} =2V |
| FB Sink Current | I _{FBSINK} | -2.45 | -1.23 | -0.45 | mA | V _{FB} =1V, V _{INV} =1V |
| FB Source Current | I _{FBSOURCE} | 1.0 | 6.3 | 15.0 | mA | V _{FB} =1V, V _{INV} =0.6V |
| Soft Start Time (Note 1) | T _{SS} | 1.7 | 2.7 | 5.0 | ms | |
| Oscillator Block | | | | | | |
| Oscillating Frequency | fosc | 285 | 300 | 315 | kHz | RT=51kΩ |
| Frequency Input Regulation | Δfosc | _ | 0.5 | _ | % | V _{IN} =5V to 35V |
| Enable/Sync Input Block | | | | | | |
| Output ON Voltage | V _{ENON} | 2.6 | _ | _ | V | V _{EN/SYNC} Sweep Up |
| Output OFF Voltage | V _{ENOFF} | _ | _ | 0.8 | V | V _{EN/SYNC} Sweep Down |
| Sink Current | I _{EN/SYNC} | _ | 19 | 60 | μA | |
| | | | | | | |

(Note 1)This item is not 100% production tested.

(Caution) EN / SYNC and RT are shorted at VIN and EN / SYNC short-circuited, IC is destroyed in VIN ≥ 7V,

Typical Performance Curves

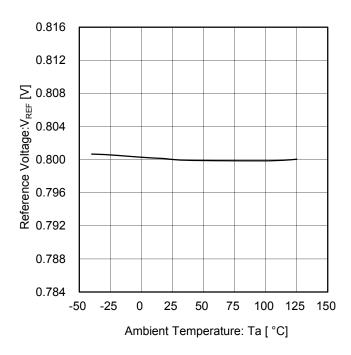


Figure 1. Reference Voltage vs Temperature

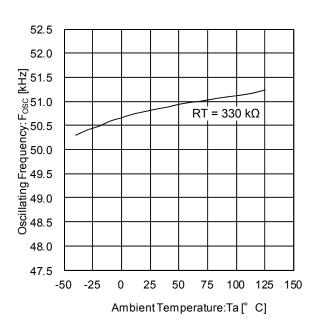


Figure 2. Oscillating Frequency vs Temperature (RT=330k Ω)

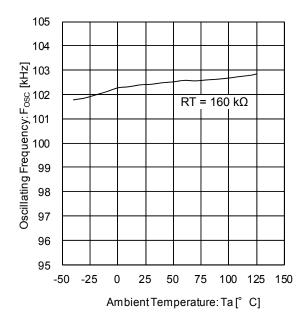


Figure 3.Oscillating Frequency vs Temperature $(RT=160k\Omega)$

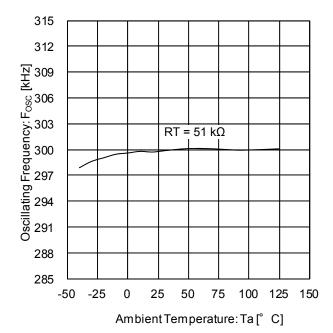


Figure 4.Oscillating Frequency vs Temperature $(RT=51k\Omega)$

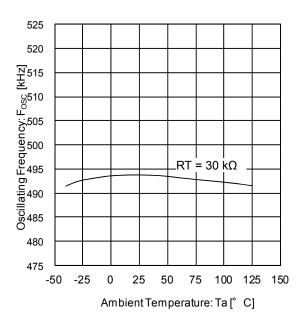


Figure 5.Oscillating Frequency vs Temperature (RT=30kΩ)

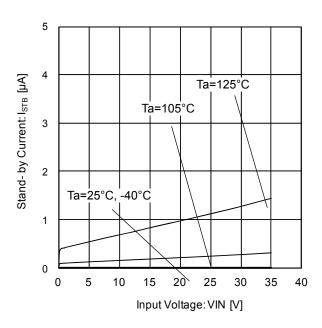


Figure 6.Standby Circuit Current vs Input Voltage

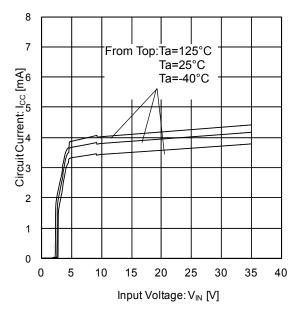


Figure 7. Circuit Current vs Input Voltage


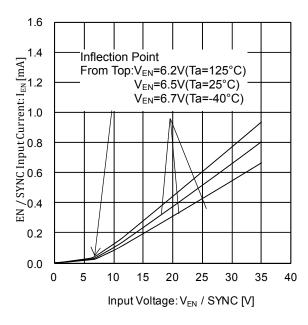



Figure 8.EN/SYNC Input Current vs Input Voltage

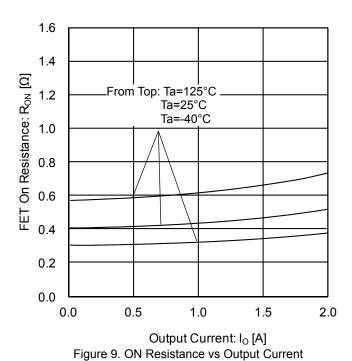


 $(V_{IN}=5V)$

1.6 1.4 FET On Resistance: R_{ON} [Ω] From Top: Ta=125°C 1.2 Ta=25°C Ta=-40°C 1.0 8.0 0.6 0.4 0.2 0.0 0.0 0.5 2.0 1.0 1.5 Output Current: lo [A]

Figure 10. ON Resistance vs Output Current $(V_{IN} = 13.2V)$

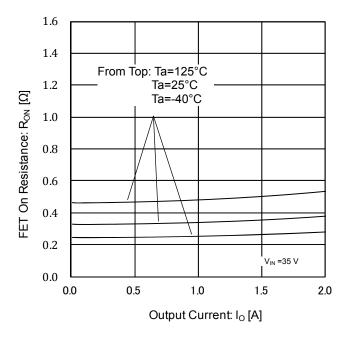



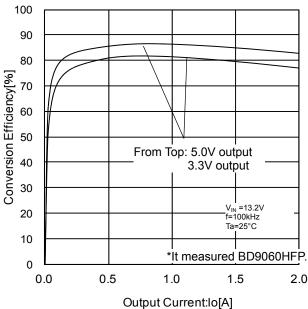


Figure 12.Conversion Efficiency vs Output Current (f=100kHz)

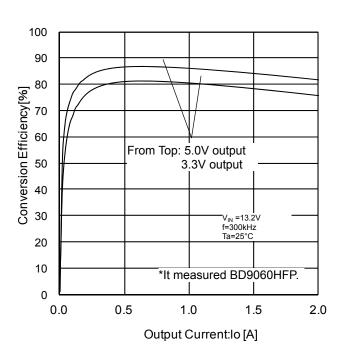


Figure 13.Conversion Efficiency vs Output Current (f=300kHz)

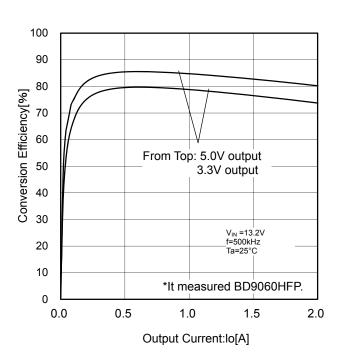


Figure 14.Conversion Efficiency vs Output Current (f=500kHz)

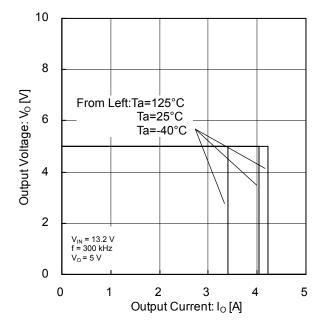


Figure 15. Overcurrent Protected Operation Current

Timing Chart

· Basic Operation

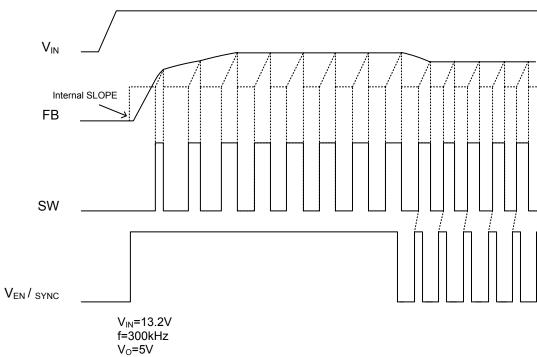


Figure 16. Timing Chart (Basic Operation)

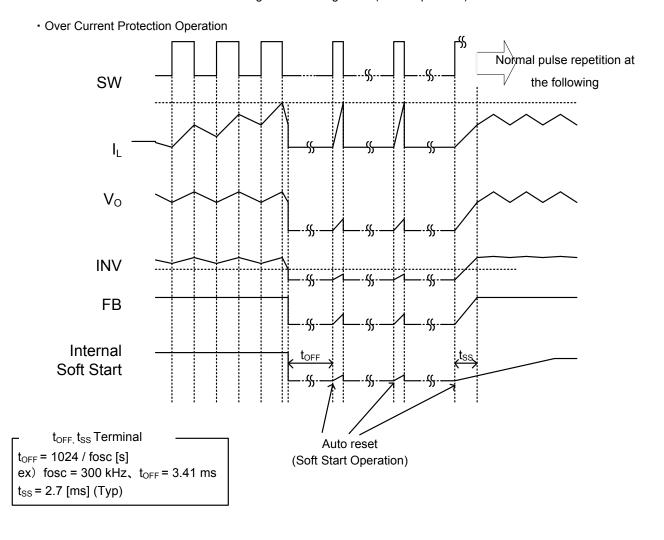


Figure 17.Timing Chart (Over Current Protection Operation)

External Synchronizing Function

In order to activate the external synchronizing function, connect the frequency-setting resistor to the RT pin and then input a synchronizing signal to the EN/SYNC pin. As the synchronizing signal, input a pulse wave higher than a frequency determined with the setting resistor(RT). However, the external sync frequency should be configured between 1.05 to 1.5 times the set frequency.

(Frequency determined with RT x 1.05 ≤ External sync frequency ≤ Frequency determined with RT x 1.5) (ex.) When the configured frequency is 300kHz, the external sync frequency should be between 315kHz to 450kHz. Furthermore, the pulse wave's LOW voltage should be under 0.8V and the HIGH voltage over 2.6V,(when the HIGH voltage is over 6V the EN/SYNC input current increases [Refer to p.7 Fig.8])the through rate of stand-up(and stand-down)under 20V/µs. The duty of External sync pulse should be configured between 20% to 80%.

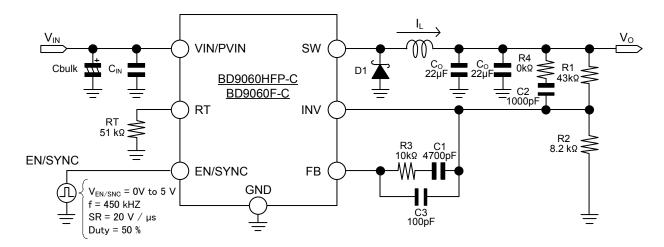


Figure 18.External Sync Sample Circuit (V_O=5V,I_O=1A,f=300kHz,EN/SYNC=450kHz)

Selection of Components Externally Connected

Necessary parameters are as follows in designing the power supply.

| Parameter | Symbol | SpecificationCase |
|-----------------------------|-----------------|-------------------------------|
| Input Voltage | V_{IN} | 8V to 33V |
| Output Voltage | Vo | 5V |
| Output Ripple Voltage | ΔV_{PP} | 20mVp-p |
| Input Range | Io | Min 0.5A / Typ1.0A / Max 1.5A |
| Switching Frequency | f _{SW} | 300kHz |
| Operating Temperature Range | Topr | -40°Cto+125°C |

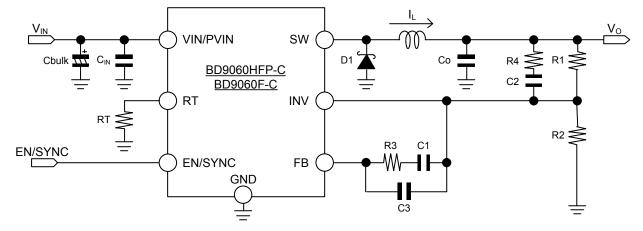


Figure 19. Application Sample Circuit

1. Setofoutputinductor L constant

In DC/DC converter, to supply electric current continuously to the load, the LC filter is necessary for the smoothness of the output voltage. ΔI_L that flows to the inductor becomes small when a big inductor of the inductance value is selected, and the voltage of the output ripple becomes small. It is a trade-off against the responsiveness, the size and the cost of the inductor.

The inductance value of the inductor is shown in the next expression.

$$L = \frac{(V_{IN(MAX)} - V_O) \times V_O}{V_{IN(MAX)} \times f_{SW} \times \Delta I_L}$$
 · · · (a)

(V_{IN(MAX)}:Maximum input voltage,ΔI_L:Inductor ripple current)

 ΔI_L is set to make SW the continuous control action (I_L keeps continuously flowing) usually. The condition of the continuous operation is shown in the next expression.

$$Io > \frac{(V_{IN} - V_O) \times V_O}{2 \times V_{IN} \times f_{SW} \times L}$$
 · · · (b)

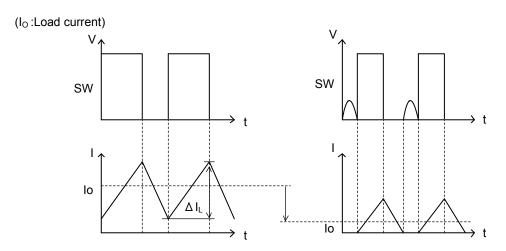


Figure 20. Continuous Action

Figure 21. Discontinuous Action

The smaller the ΔI_L , the Inductor core loss(iron loss) and loss due to ESR of the output capacitor, ΔV_{PP} will be reduced. ΔV_{PP} is shown in the next expression.

$$\Delta V_{PP} = \Delta I_L \times ESR + \frac{\Delta I_L}{8 \times Co \times f_{SW}}$$
 · · · (c)

(ESR: Equivalent series resistance of output capacitor, Co: Output condenser capacity)

 ΔI_L is set to approximately 10% to 40% of I_O . Generally, even if ΔI_L is somewhat large, ΔV_{PP} of the target is satisfied because the ceramic capacitor has super-low ESR. In that case, it is also possible to use it by the discontinuous action. The inductance value of the inductor can be set small as an advantage.

It contributes to the miniaturization of the set because of the large rated current, small inductor is possible if the inductance value is small. The disadvantagesare the increase in core losses in the inductor, the decrease in maximum output current, and the deterioration of theresponse. When other capacitors (electrolytic capacitor, tantalum capacitor, and electroconductive polymer etc) are used for output capacitor C_{O} , check the ESR from the manufacturer's data sheet and determine the ΔI_{L} to fit within the acceptable range of ΔV_{PP} . Especially in the case of electrolytic capacitor, because the capacity decrease at the low temperature is remarkable, ΔV_{PP} increases. When using capacitor at the low temperature, it is necessary to note this. The maximum output electric current is limited to the overcurrent protection working current as shown in the next expression.

$$Io_{(MAX)} = I_{LIMIT(MIN)} - \frac{\Delta I_L}{2}$$
 · · · (d)

Where: I_{O(MAX)} is Maximum output current, I_{LIMIT(min)}:Minimum operating output switch current of overcurrent protection2.5A




Figure 22.OvercurrentDetection

The shield type (closed magnetic circuit type) is the recommended type of inductor. There is no problem in the open magnetic circuit type if the application is low cost and does not consider noise. In that case, there is magnetic field radiation between the parts. There should be enough space between the parts.

For ferrite core inductor type, in particular, please note the magnetic saturation. It is necessary not to saturate the core in allcases. Care must be taken given the provisions of the current rating because it differs according to each manufacturer. Please confirm the rated current at the maximum ambient temperature of the application to the manufacturer.

2. SetofoutputCapacitor Co constant

The output capacitor is selected on the basis of ESR that is required from the expression (c). ΔV_{PP} can be reduced by using a capacitor with a small ESR. The ceramic capacitor is the best selection that meets this requirement. The ceramic capacitor contributes to the miniaturization of the set because it has small ESR. Please confirm frequency characteristic of ESR from the datasheet of the manufacturer, and select the one that ESR in the switching frequency used is low.It is necessary to note the ceramic capacitor because the DC biasing characteristic is remarkable. For the voltage rating of the ceramic capacitor, twice or more of the maximum output voltage is usually required. By selecting those high voltage rating, it is possible to reduce the influence of DC bias characteristics. Moreover, in order to maintain good temperature characteristics, the one with the characteristic of X7R and X5R or more is recommended. Because the voltage rating of a mass ceramic capacitor is low, the selection becomes difficult in the application with high output voltage. In that case, please select electrolytic capacitor. Please select the one with voltage rating of 1.2 times or more of the output voltage when you use electrolytic capacitor. Electrolytic capacitors are high blocking voltage, a large capacity, and the little DC biasing characteristic, and are generally cheap. Because main failure mode is OPEN, it is effective to use electrolytic capacitor selection in the application when reliability is demanded such as in-vehicle. There are disadvantages as, ESR is relatively large, and decrease of capacity at low temperatures. It is necessary to note this so that the low temperature, and in particular, ΔV_{PP} may increase. Moreover, the feature of this capacitor is to define the lifetime because there is possible dry up. A very excellent characteristic of the tantalum capacitor and the electro-conductive polymer is the thermal characteristic unlike the electrolytic capacitor. The design is facilitated because there is little DC biasing characteristic like the electrolytic capacitor. Typically, for voltage rating, a tantalum capacitor is selected twice the output voltage, and for conductive polymer is selected 1.5 times more than the output voltage. The disadvantage of the tantalum capacitor is that the failure mode is SHORT, and the breakdown voltage is low. It is not generally selected in the application that reliability such as in-vehicle is demanded. The disadvantage of the electroconductive polymer is that the failure mode is SHORT(SHORT happens by accident chiefly, though it is OPEN), the breakdown voltage is low, and generally expensive. Although in most cases ignored, these capacitors are rated in ripple current. The RMS values of the ripple electric current obtained in the next expression must not exceed the ratings ripple electric current.

$$I_{CO(RMS)} = \frac{\Delta I_L}{\sqrt{12}}$$
 · · · (e)

Where: I_{CO(RMS)} is RMS value of the ripple electric current

In addition, with respect toC_O, choose capacitance value lessthan the valueobtained by the following equation.

$$Co_{(MAX)} = \frac{1.7 \text{ ms} \times (I_{LIMIT(MIN)} - I_{O(MAX)})}{V_O}$$
 · · · (f)

Where: I_{LIMIT(MIN)} is OCP operation output switch current(Min) 2.5A,1.7ms: Soft Start Time(Min)

There is a possibility that boot failure happens when the limits from the above-mentioned are exceeded. Especially if the capacitance value is extremely large, you may activate over-current protection by their ush current at startup, and the output does not start. Please confirm this well on the actual circuit. The capacitance value is an important parameter that decides the LC resonant frequency. For stable transient response, the loop is dependent on the C_O. Please select after confirming the setting of the phase compensation circuit.

3. Setting constant of capacitor C_{IN} / C_{bulk} input

The input capacitor is usually required for two types of decoupling: capacitors C_{IN} and bulk capacitors C_{bulk} . Ceramic capacitor $1\mu F$ to $10\mu F$ is necessary for the decoupling capacitor. Ceramic capacitor is effective by being placed as close as possible to the VIN pin. Voltage rating is recommended to more than 1.2 times the maximum input voltage, or twice the normal input voltage. About the bulk capacitor, the decrease in the line voltage is prevented, and the role of the backup power supply to keep the input potential constant is realized. The low ESR electrolytic capacitor with large capacity is suitable for the bulk capacitor. It is necessary to select the best capacitance value as per set application. When impedance on the input side is high because wiring from the power supply to VIN is long, etc., then high capacitance is needed. In actual use conditions, it is necessary to verify that there is no problem when IC operation turns off the output due to the decrease of V_{IN} at transient response. In that case, please be careful not to exceed the rated ripple current of the capacitor. The RMS value of the input ripple electric current is obtained in the next expression.

$$I_{CIN(RMS)} = Io_{(MAX)} \frac{\sqrt{Vo \times (V_{IN} - Vo)}}{V_{IN}}$$
 · · · (g)

where: I_{CIN(RMS)} is RMS value of the input ripple electric current

In addition, in automotive and other applications requiring reliability, it is recommended that capacitors are connected in parallel to accommodate a multiple of electrolytic capacitors minimal dry up chances. We will recommend making it to two series + two parallel structures to decrease the risk of the ceramic capacitor by short destruction. The line has been improved to the summary respectively by 1 pack in each capacitor manufacturer and confirms two series and two parallel structures to each manufacturer.

4. Setting output voltage

Output voltage is governed by the following equation.

$$Vo = 0.8 \times \frac{R1 + R2}{R2}$$
 · · · (h)

Please set return resistance R2 below $30k\Omega to$ reduce the error margin by the bias current.In addition, since power efficiency is reduced with a small R1 + R2, please set the current flowing through the feedback resistor to be small enough than the output current I_0 .

5. Selection of the schottky barrier diode

The schottky barrier diode that has small forward voltage and short reverse recovery time is used for Di.An important parameter for selecting it is an average rectified current and a direct current inverse-direction voltage. Average rectified current $I_{F(AVG)}$ is obtained in the next expression.

$$I_{F(AVG)} = Io_{(MAX)} \times \frac{v_{IN(MAX)} - v_o}{v_{IN(MAX)}}$$
 · · · (i)

where: I_{F(AVG)} isAverage rectified current

The absolute maximum rating of the schottky barrier diode rectified current average is more than 1.2 times $I_{F(AVG)}$ and the absolute maximum rating of the DC reverse voltage is greater than or equal to 1.2 times the maximum input voltage. The loss of Di is obtained in the next expression.

$$P_{Di} = Io_{(MAX)} \times \frac{V_{IN(MAX)} - Vo}{V_{IN(MAX)}} \times VF$$
 · · · (j)

Where: VF is Forward voltage in Io(MAX) condition

Selecting a diode that has small forward voltage, and has short reverse recovery time is highly effective. Please select the 0.6V Max for the forward voltage. Please note that there is possibility of the internal element destruction when a diode with larger VF than this is used. Because the reverse recovery time of the schottky barrier diode is so shortthat it is possible to disregard, the switching loss can be disregarded. When it is necessary that the diode endures in the state of the output short-circuit, power dissipation ratings and the heat radiation ability are needed in addition. The rated current is required about 1.5 times the overcurrent detection value. The loss when the output is short-circuited is obtained in the next expression.

$$P_{Di(SHORT)} = I_{LIMIT(MAX)} \times VF \qquad \qquad \cdot \cdot \cdot (k)$$


Where: I_{LIMIT(MAX)} isOCP operation output switch current(MAX) 6A

6. Setting the oscillating frequency

An internal oscillating frequency can be set by the resistance connected with RT.

The range that can be set is 50kHz to 500kHz, and the relation between resistance and the oscillation frequency is decided as shown in the figure below. When setting beyond this range, there is a possibility of non-oscillation and IC operation cannot be guaranteed.

 $RT[k\Omega]$

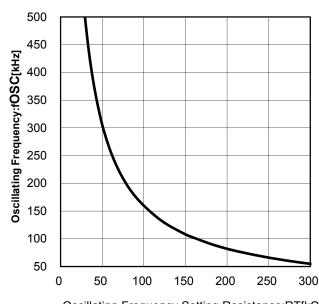

| 27 | 537 | 100 | 160 |
|----|-----|-----|-----|
| 30 | 489 | 110 | 146 |
| 33 | 449 | 120 | 134 |
| 36 | 415 | 130 | 124 |
| 39 | 386 | 150 | 108 |
| 43 | 353 | 160 | 102 |
| 47 | 324 | 180 | 91 |
| 51 | 300 | 200 | 82 |
| 56 | 275 | 220 | 75 |
| 62 | 250 | 240 | 69 |
| 68 | 229 | 270 | 61 |
| 75 | 209 | 300 | 55 |
| 82 | 192 | 330 | 50 |
| 91 | 174 | 360 | 46 |

 $RT[k\Omega]$

fosc[kHz]

fosc[kHz]

Oscillating Frequency Setting Resistance: $RT[k\Omega]$

Figure 23. Oscillating Frequency vs RT

Graph'svalue is Typical and You need to consider thevariation of ±5% respectively.

7. Setting the phase compensation circuit

A high response performance is achieved by setting 0dB crossing frequency fc of the total gain (frequency at the gain 0dB) high. However, you need to be aware of the relationship to be a trade-off between stability. Moreover, DC/DC converter application is sampled by switching frequency, and should suppress the gain in switching frequency. It is necessary to set 0dB crossing frequency to 1/10 or less of the switching frequency. In summary, target these characteristics with the application as follows.

- When thegain is 1(0dB), phase lagis less than or equal to135 °(More than45 °phase margin).
- 0dB crossing frequency is 1/10 times or less of the switching frequency. To improve the responsiveness, higher frequency of switching frequency is needed.

We recommend the Bode diagram to be made by using the transfer function of the control loop to obtain frequency characteristic of target for the phase compensation circuit. Make sure the frequency characteristics of the total gain by totaling the transfer function of the following three.

$$G_{LC} = \frac{1 + \frac{s}{2\pi \times f_{ESR}}}{1 + \frac{s}{Q \times 2\pi \times f_{LC}} + \left(\frac{s}{2\pi \times f_{LC}}\right)^2}$$
 · · · (I)

$$G_{FB} = \frac{\left(1 + \frac{s}{2\pi \times f_{Z1}}\right)\left(1 + \frac{s}{2\pi \times f_{Z2}}\right)}{s \times R1 \times C1\left(1 + \frac{s}{2\pi \times f_{P1}}\right)\left(1 + \frac{s}{2\pi \times f_{P2}}\right)} \cdot \cdot \cdot (m)$$

$$G_{PWM} = \frac{V_{IN}}{\Delta V_{RAMP}}$$
 · · · (n)

Where: G_{LC}is Transfer function of the LCresonance

 G_{FB} is Transfer functionof thephase compensation G_{PWM} is Transfer functionof the PWM, $\Delta V_{RAMP}:\,0.7V$

Because BD9060HFP-C/BD9060F-C is a voltage mode control, two poles and two zeroes of the phase interpolator circuitshown in the figure below can be added. Necessary frequencies of poles and zeroes are obtained in the following.

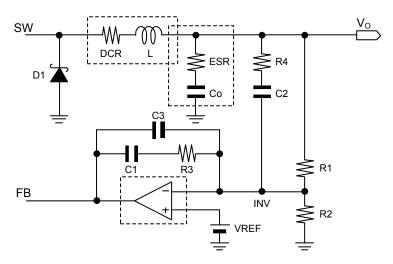


Figure 24. Phase Compensation Circuit

$$f_{LC} = \frac{1}{2\pi} \sqrt{\frac{Ro + DCR}{L \times Co(Ro + ESR)}}$$
 · · · (0)

$$f_{ESR} = \frac{1}{2\pi \times ESR \times Co}$$
 · · · (p)

$$f_{Z1} = \frac{1}{2\pi \times R3 \times C1}$$
 · · · · (q)

$$f_{Z2} = \frac{1}{2\pi \times (R1+R4) \times C2}$$
 · · · (r)

$$f_{P1} = \frac{c_{1} + c_{3}}{2\pi \times R_{3} \times c_{1} \times c_{3}}$$
 · · · · (s)

$$f_{P2} = \frac{1}{2\pi \times R4 \times C2}$$
 · · · (t)

Where: DCR isDCresistanceof the inductor

Ro isLoad resistance

Frequency response is optimized by placing the appropriate frequency of these poles and zeros. The standard is as follows.

$$0.2 \times f_{LC} \le f_{Z1} \le f_{LC}$$

$$0.5 \times f_{LC} \le f_{Z2} \le f_{LC} \times 2$$

$$f_{P1} \approx f_{SW} \times 0.5$$

$$f_{P2} \approx f_{ESR}$$

$$\cdot \cdot \cdot (x)$$

The phase delays (-180°) by the LC resonance can be canceled by setting the phase amends as mentioned above. fp2is not necessary if f_{ESR} is higher than the SW frequency (The ceramic capacitor that has low ESR is used for the output capacitor).In addition, if Q(quality factor)of the LC filter is high,the gain may peak out, and phase margin can not be secured sufficiently.When Q is high, f_{z1} and f_{z2} are brought close to f_{LC} as much as possible. Q is obtained in the next expression.

$$Q = \frac{\sqrt{L \times Co \times Ro(Ro + ESR)}}{L + Co \times Ro \times ESR}$$
 · · · (y)

$$\approx Ro \times \sqrt{\frac{Co}{L}}$$

The setting method by above-mentioned conditional expression is suitable as the starting point of the phase amends. Please confirm that you meet the frequency characteristics to create a Bode plot. Actually, the frequency characteristic changes are greatly affected by the type and the condition (temperature, etc.) of parts that are used, and the wire routing and layout for the PCB. For instance, the LC resonance point moves because of the capacity decrease at low temperature and an increase of ESR when electrolytic capacitor is used for the output capacitor that there is even possibility of oscillation. To C1, C2 and C3 for phase compensation capacitor, use of CH products or temperature compensation type C0G, etc. with an excellent thermal characteristic are recommended.

Please confirm stability and responsiveness in actual equipment.

To check on the actual frequency characteristics, use a FRA or a gain-phase analyzer. Moreover, the method of observing the degree of change by the loading response can be done, when these measuring instruments do not exist. The response is low when the output is made to change under no load to maximum load, and there is a lot of variation quantities. It can be said that the phase margin degree is low when there is a lot of ringing frequencies after it changes, usually two times or more of ringing as standard. However, a quantitative phase margin degree cannot be confirmed.

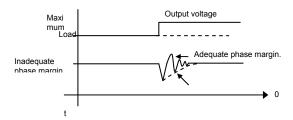


Figure 25. Load Response

Application Examples

| Parameter | Symbol | Specificationcase |
|-----------------------|-----------------|--------------------------------|
| Input Voltage | V _{IN} | 8V to 28V |
| Output Voltage | Vo | 5V |
| Output Ripple Voltage | ΔV_{PP} | 20mVp-p |
| Output Current | lo | Min 0.5A / Typ 1.0A / Max 1.5A |
| Switching Frequency | f _{SW} | 300kHz |
| Operating Temperature | Topr | -40°Cto+125°C |




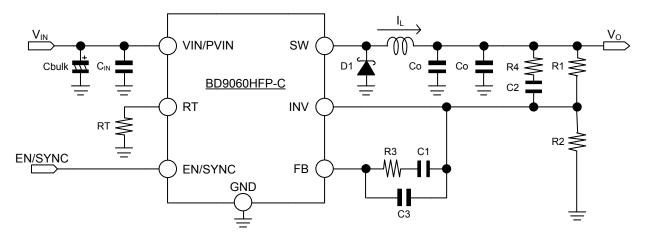



Figure 26. Application Examples 1

| No | Package | Parameters | Part name(series) | Туре | Manufacturer |
|-------------------|-----------------------------|--------------------|-------------------|-------------------------|--------------|
| R1 | 1005 | 43kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R2 | 1005 | 8.2kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R3 | 1005 | 10kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R4 | 1005 | 0kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| RT | 1005 | 51kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| C1 | 1005 | 4700pF,R,50V | GCM series | Ceramic capacitions | MURATA |
| C2 | 1005 | 1000pF,CH,50V | GCM series | Ceramic capacitiors | MURATA |
| C3 | 1005 | 100pF,CH,50V | GCM series | Ceramic capacitions | MURATA |
| C_{IN} | 3216 | 2.2µF,X7R.50V | GCM series | Ceramic capacitiors | MURATA |
| Co | 3216 | 22µF,X7R,16V | GCM series | Ceramic capacitions | MURATA |
| C_{bulk} | | 220µFx2,35V | CZ series | Electrolytic capacitors | NICHICON |
| L | 10x10x3.8(mm ³) | 33µH | CLF10040 series | Coil | TDK |
| D | CPD | Average I = 6A Max | RB095B-40 | Schottky Diodes | ROHM |









Output Ripple Voltage

Frequency Characteristics

Load Change

| Parameter | Symbol | Specificationcase |
|-----------------------|-----------------|--------------------------------|
| Input Voltage | V _{IN} | 5 V to 16V |
| Output Voltage | Vo | 3.3V |
| Output Ripple Voltage | ΔV_{PP} | 20mVp-p |
| Output Current | Io | Min 0.1A / Typ 0.4A / Max 0.8A |
| Switching Frequency | f _{SW} | 300kHz |
| Operating Temperature | Topr | -40°Cto+85°C |




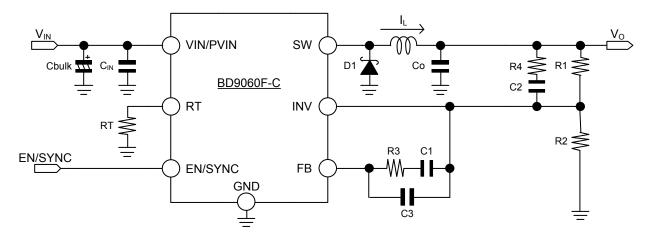



Figure 27. Application Examples 2

| No | Package | Parameters | Part name(series) | Туре | Manufacturer |
|-------------------|-----------------------------|--------------------|-------------------|-------------------------|--------------|
| R1 | 1005 | 47kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R2 | 1005 | 15kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R3 | 1005 | 8.2kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| R4 | 1005 | 0kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| RT | 1005 | 51kΩ, 1%, 1/16W | MCR01 series | Chip resistors | ROHM |
| C1 | 1005 | 4700pF, R, 50V | GCM series | Ceramic capacitions | MURATA |
| C2 | 1005 | 820pF, CH, 50V | GCM series | Ceramic capacitiors | MURATA |
| C3 | 1005 | 100pF, CH, 50V | GCM series | Ceramic capacitiors | MURATA |
| C _{IN} | 3216 | 2.2µF, X7R, 50V | GCM series | Ceramic capacitions | MURATA |
| Co | 3216 | 22µF, X7R, 16V | GCM series | Ceramic capacitiors | MURATA |
| C _{bulk} | | 220µF, 50V | CD series | Electrolytic capacitors | NICHICON |
| L | 10x10x3.8(mm ³) | 33µH | CLF6045 series | Coil | TDK |
| D | PMDS | Average I = 2A Max | RB060L-40 | Schottky Diodes | ROHM |









Conversion Efficiency

Output Ripple Voltage

Frequency Characteristics

Load Change

Input Filter

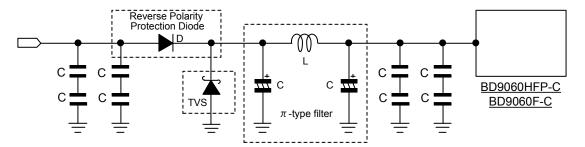


Figure 28. Frequency Characteristics

The input filter circuit for EMC measures is depicted in Figure 28.

The π type filters are the third LC filters. When the decoupling capacitor for high frequency is insufficient, it uses π type filters.

Because a large attenuation characteristic is obtained, an excellent characteristic can be obtained as an EMI filter.


TVS(TransientVoltageSuppressors) is used for the first protection of the in-vehicle power supply line. Because it is necessary to endure high energy that dumps the load, a general zener diode is insufficient. The following are recommended. To protect it when the power supply such as BATTERY is accidentally connected in reverse, reverse polarity protection diode is needed.

| No | Part name (series) | Manufacturer |
|-----|---------------------|--------------|
| L | CLF series | TDK |
| | XAL series | Coilcraft |
| С | CJ series | NICHICON |
| | CZ series | NICHICON |
| TVS | SM8 series | VISHAY |
| D | S3A thru S3M series | VISHAY |

Recommended Parts Manufacturer List

Show the parts manufacturer for the recommended reference.

| Device | Туре | Manufacturer | URL | |
|--------|-------------------------|--------------|--------------------|--|
| С | Electrolytic capacitors | NICHICON | www.nichicon.com | |
| С | Ceramic capacitors | MURATA | www.murata.com | |
| L | Coils | TDK | www.global.tdk.com | |
| L | Coils | Coilcraft | www.coilcraft.com | |
| L | Coils | Sumida | www.sumida.com | |
| D | Diodes | VISHAY | www.vishay.com | |
| D | Diodes/Resistors | ROHM | www.rohm.com | |

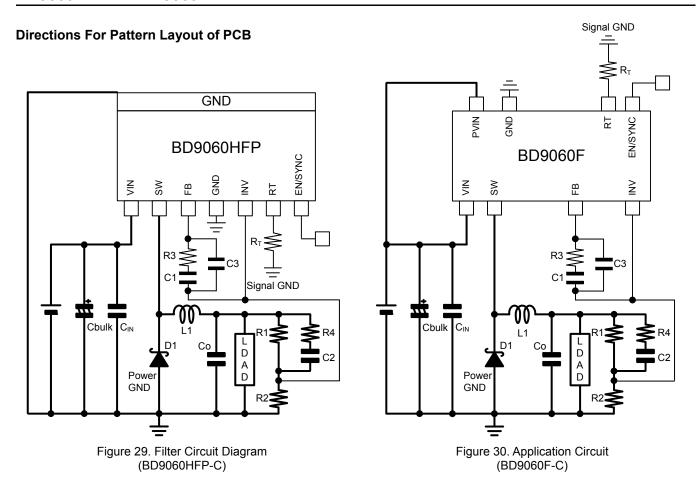

- 1. Arrange the wirings shown by wide lines as short as possible in a broad pattern.
- 2. Locate the input ceramic capacitor C_{IN} as close to the VIN-GND pin as possible.
- 3. Locate the R_T as close to the GND pin as possible.
- 4. Locate the R1 and R2 as close to the INV pin as possible, and provide the shortest wiring from the R1 and R2 to the INV pin.
- 5. Locate the R1 and R2 as far away from the L1 as possible.
- 6. Separate Power GND (schottky diode, I/O capacitor`s GND) and Signal GND (R_T,GND), so that SW noise doesnot have an effect on SIGNAL GND at all.
- 7. Design the POWER wire line as wide and short as possible.

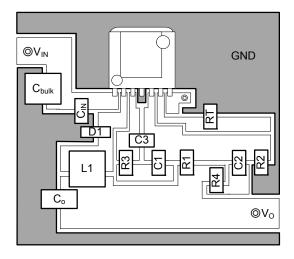


Figure 31. BD9060HFP-C Reference Layout Pattern

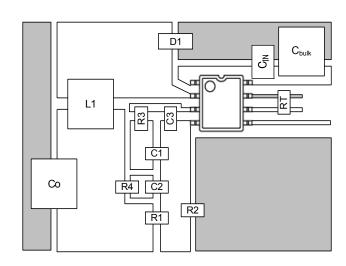


Figure 32. BD9060F-C Reference Layout Pattern

Please make GND to cover the wide area with no parts. Gray areas mean GND in the above Layout Pattern.

Power Dissipation

For thermal design, be sure to operate the IC within the following conditions. (Since the temperatures described hereunder are all guaranteed temperature, take margin into account.)

- 1. The ambient temperature Ta is to be 125°C or less.
- 2. The chip junction temperature Tj is to be 150°C or less.

The chip junction temperature Tj can be considered in the following two patterns: °C

1. To obtain Tj from the IC surface temperatureTc in actual use

$$Tj = Tc + \theta jc \times W$$

<Reference value> θjc : HRP7 7°C/W

θjc: SOP8 32.5°C/W

2. To obtain Tj from the ambient temperature Ta

$$Ti = Ta + \theta ia \times W$$

<Reference value > θja : HRP7 125.0°C/W Single piece of IC

54.3°C/W 2-layer PCB (Copper foil area on the front side of PCB : 15mm×15mm) 22.7°C/W 2-layer PCB (Copper foil area on the front side of PCB : 70mm×70mm) 17.1°C/W 4-layer PCB (Copper foil area on the front side of PCB : 70mm×70mm)

PCB Size: 70mm×70mm×1.6mm (PCB incorporates thermal via) Copper foil area on the front side of PCB: 10.5mm×10.5mm

θja: SOP8 222.2°C/W Single piece of IC

181.3°C/W 1-layer PCB(Copper foil area on the front side of PCB: 70mm×70mm)

The heat loss W of the IC can be obtained by the formula shown below:

$$W = Ron \times Io^{2} \times \frac{vo}{v_{IN}} + V_{IN} \times Icc + Tr \times V_{IN} \times Io \times f$$

Where:

R_{ON}is the ON resistance of IC (refer to page.8)

lo isthe Load current

Voisthe Output Voltage

V_{IN}istheinput Voltage

I_{CC}isthe Circuit current(refer to page.5)

Tr is the Switching rise/fall time (approximately 15n/35ns)

fis the Oscillating Frequency

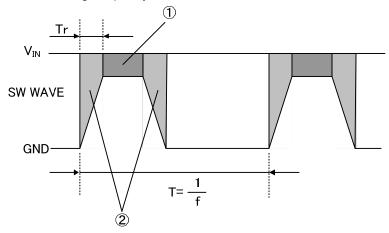


Figure 33. SW waveform

 \bigcirc Ron × Io²

$$22 \times \frac{1}{2} \times Tr \times \frac{1}{T} \times V_{IN} \times Io$$

$$= Tr \times V_{IN} \times Io \times f$$

I/O Equivalent Circuit

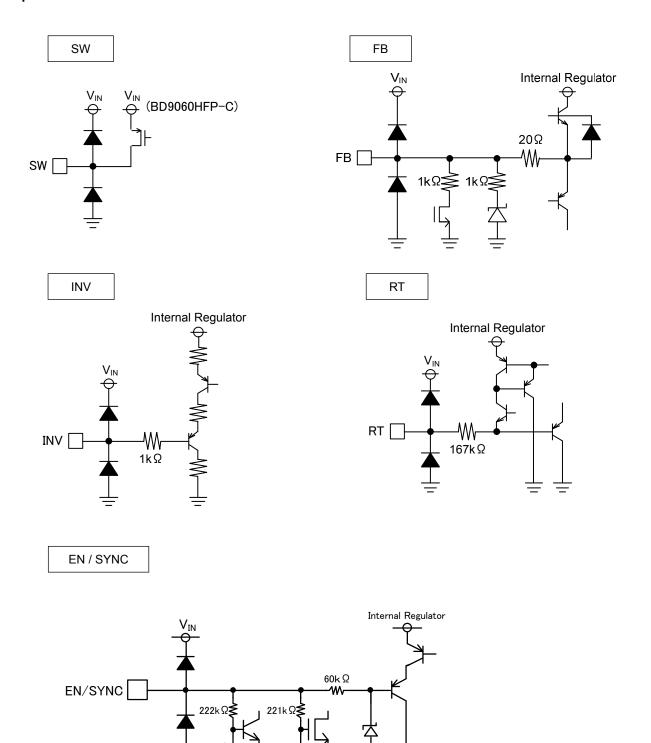


Figure 34. I/O Equivalent Circuit

Operational Notes

1. Reverse Connection of Power Supply

Connecting the power supply in reverse polarity can damage the IC. Take precautions against reverse polarity whenconnecting the power supply, such as mounting an external diode between the power supply and the IC's powersupply terminals.

2. Power Supply Lines

Design the PCB layout pattern to provide low impedance ground and supply lines. Separate the ground and supplylines of the digital and analog blocks to prevent noise in the ground and supply lines of the digital block from affectingthe analog block. Furthermore, connect a capacitor to ground at all power supply pins. Consider the effect oftemperature and aging on the capacitance value when using electrolytic capacitors.

Ground Voltage

The voltage of the ground pin must be the lowest voltage of all pins of the IC at all operating conditions. Ensure that nopins are at a voltage below the ground pin at any time, even during transient condition.

4. Ground Wiring Pattern

When using both small-signal and large-current GND traces, the two ground traces should be routed separately butconnected to a single ground at the reference point of the application board to avoid fluctuations in the small-signalground caused by large currents. Also ensure that the GND traces of external components do not cause variations onthe GND voltage. The power supply and ground lines must be as short and thick as possible to reduce line impedance.

5. Thermal Consideration

Should by any chance the power dissipation rating be exceeded the rise in temperature of the chip may result indeterioration of the properties of the chip. The absolute maximum rating of the Pd stated in this specification is whenthe IC is mounted on a 70mm x 1.6mm glass epoxy board. In case of exceeding this absolute maximum rating, increase the board size and copper area to prevent exceeding the Pd rating.

6. Recommended Operating Conditions

These conditions represent a range within which the expected characteristics of the IC can be approximately obtained. The electrical characteristics are guaranteed under the conditions of each parameter.

7. Rush Current

When power is first supplied to the IC, it is possible that the internal logic may be unstable and inrushcurrent may flow instantaneously due to the internal powering sequence and delays, especially if the IChas more than one power supply. Therefore, give special consideration to power coupling capacitance, power wiring, width of GND wiring, and routing of connections.

Operation Under Strong Electromagnetic Field

Operating the IC in the presence of a strong electromagnetic field may cause the IC to malfunction.

9. Testing on Application Boards

When testing the IC on an application board, connecting a capacitor directly to a low-impedance output pin maysubject the IC to stress. Always discharge capacitors completely after each process or step. The IC's power supplyshould always be turned off completely before connecting or removing it from the test setup during the inspection process. To prevent damage from static discharge, ground the IC during assembly and use similar precautions during transport and storage.

10. Inter-pin Short and Mounting Errors

Ensure that the direction and position are correct when mounting the IC on the PCB. Incorrect mounting may result in damaging the IC. Avoid nearby pins being shorted to each other especially to ground. Inter-pin shorts could be due to many reasons such as metal particles, water droplets (in very humid environment) and unintentional solder bridgedeposited in between pins during assembly to name a few.

11. Unused Input Terminals

Input terminals of an IC are often connected to the gate of a CMOS transistor. The gate has extremely high impedanceand extremely low capacitance. If left unconnected, the electric field from the outside can easily charge it. The smallcharge acquired in this way is enough to produce a significant effect on the conduction through the transistor andcause unexpected operation of IC. So unless otherwise specified, input terminals not being used should be connected to the power supply or ground line.


12. Regarding the Input Pin of the IC

This monolithic IC contains P+ isolation and P substrate layers between adjacent elements in order to keep themisolated. P-N junctions are formed at the intersection of the P layers with the N layers of other elements, creating aparasitic diode or transistor. For example (refer to figure below):

When GND > Pin A and GND > Pin B, the P-N junction operates as a parasitic diode.

When GND > Pin B, the P-N junction operates as a parasitic transistor.

Parasitic diodes inevitably occur in the structure of the IC. The operation of parasitic diodes can result in mutualinterference among circuits, operational faults, or physical damage. Therefore, conditions that cause these diodes tooperate, such as applying a voltage lower than the GND voltage to an input pin (and thus to the P substrate) should be avoided.

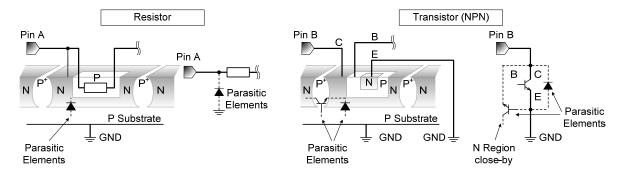

13. Ceramic Capacitor

When using a ceramic capacitor, determine the dielectric constant considering the change of capacitance withtemperature and the decrease in nominal capacitance due to DC bias and others.

14. Area of Safe Operation (ASO)

Operate the IC such that the output voltage, output current, and power dissipation are all within the Area of Safe Operation (ASO).


15. Thermal Shutdown Circuit(TSD)

This IC incorporates and integrated thermal shutdown circuit to prevent heat damage to the IC. Normal operationshould be within the power dissipation rating, if however the rating is exceeded for a continued period, the junctiontemperature (Tj) will rise and the TSD circuit will be activated and turn all output pins OFF. After the Tj falls below the TSD threshold the circuits are automatically restored to normal operation. Note that the TSD circuit operates in a situation that exceeds the absolute maximum ratings and therefore, under nocircumstances, should the TSD circuit be used in a set design or for any purpose other than protecting the IC fromheat damage.


16. Over Current Protection Circuit (OCP)


This IC incorporates an integrated overcurrent protection circuit that is activated when the load is shorted. This protection circuit is effective in preventing damage due to sudden and unexpected incidents. However, the IC shouldnot be used in applications characterized by continuous operation or transitioning of the protection circuit.



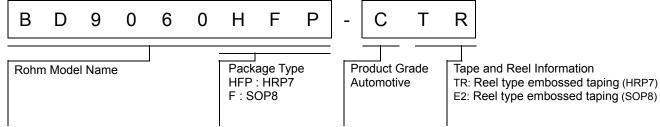

Marking Diagram

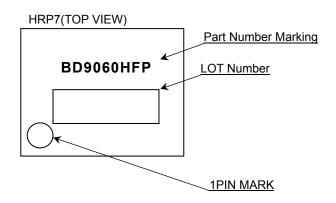

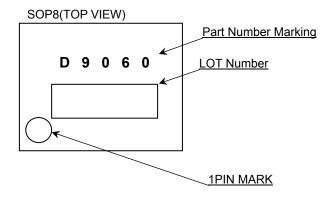

Thermal reduction characteristics

HRP7

10 9 8 **4**7.3W Power Dissipation: Pd[W] 7 35.5W 6 5 4 3 22.3 W 2 **1.0 W** 1 0 0 25 50 75 100 150 125

①: Single piece of IC Board size: 70mm×70mm×1.6mm (with thermal via on the board) Copper area:10.5mm×10.5mm

2: 2-layer PCB

(Copper foil area on the reverse side of PCB: 15mm×15mm)


Ambient Temperature: Ta[°C]

③: 2-layer PCB

(Copper foil area on the reverse side of PCB: 70mm×70mm)

4: 4-layer PCB

(Copper foil area on the reverse side of PCB: 70mm×70mm)

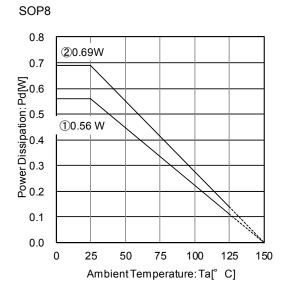



①: Single piece of IC

②: Mounted on a Rohm standard board Board size : 70mm×70mm×1.6mm

Figure 34. Figure 38. Thermal reduction characteristics

Physical Dimension, Tape and Reel Information

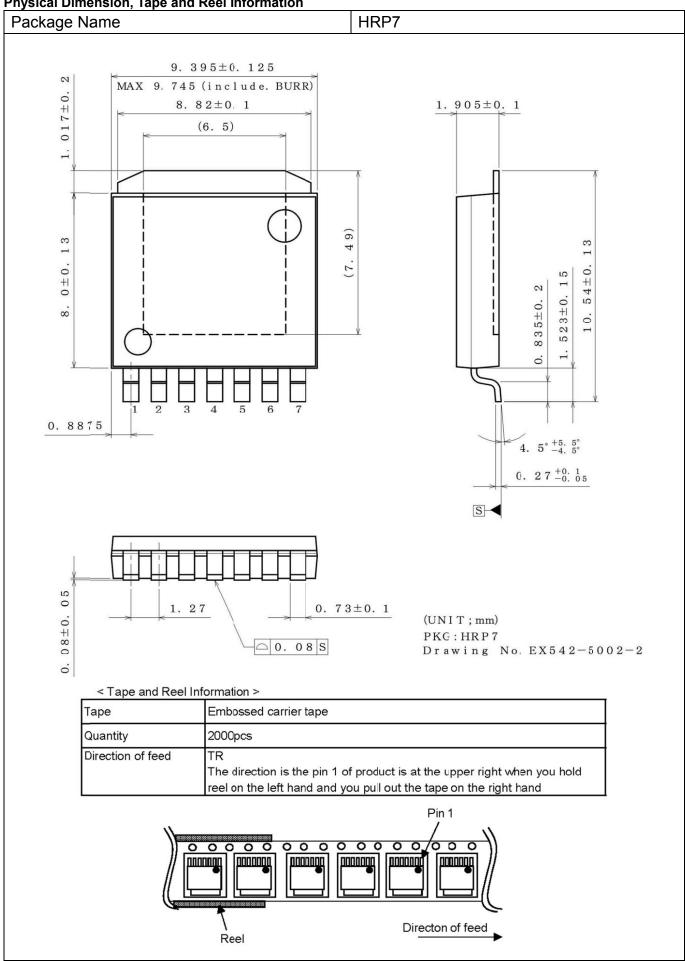

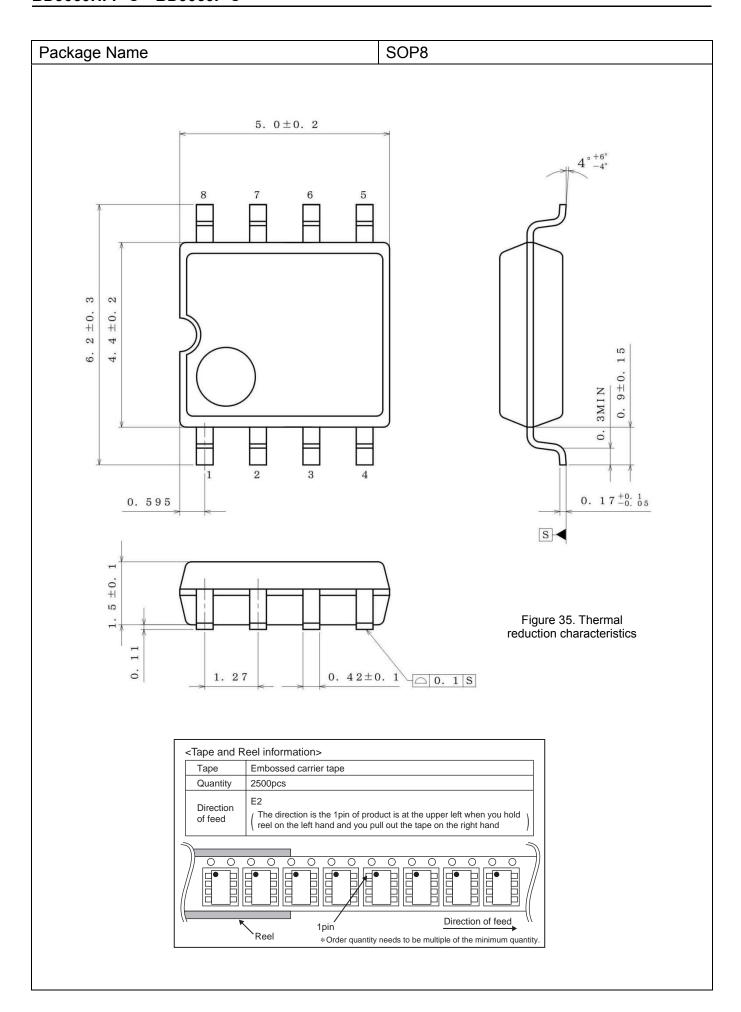

Revision History

| Date | Revision | Changes | |
|------------|----------|-------------|--|
| 2013.08.30 | 004 | New Release | |

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

| retern / medical Equipment elacomedian or the epochie rippheation | | | | | |
|---|----------|------------|----------|--|--|
| JAPAN | USA | EU | CHINA | | |
| CLASSⅢ | CLASSⅢ | CLASS II b | CLASSIII | | |
| CLASSIV | CLASSIII | CLASSⅢ | CLASSIII | | |

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- Even under ROHM recommended storage condition, solderability of products out of recommended storage time period
 may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is
 exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PAA-E Rev.003

General Precaution

- 1. Before you use our Products, you are requested to care fully read this document and fully understand its contents. ROHM shall not be in an y way responsible or liable for failure, malfunction or accident arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this docume nt is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sale s representative.
- 3. The information contained in this doc ument is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Notice – WE © 2015 ROHM Co., Ltd. All rights reserved. Rev.001

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for rohm manufacturer:

Other Similar products are found below:

R6015ENZC8 BP5034D24 BP5013 BP5011 BP5718A12 R6035ENZC8 RN142ZST2R RB520S-40TE61 RB886YT2R RB851YT2R MCR100JZHF30R1 MCR100JZHJ150 MCR50JZHFLR820 MCR50JZHJ330 ML610Q793-SDK MNR34J5ABJ223 BD750L2FP-EVK-301 BD9009HFP-EVK-001 BD9285F-GE2 KTR10EZPF2203 SML-810TBT86 RB168L-60TE25 MCR100JZHF1301 MCR100JZHJ4R3 MCR100JZHJ513 MCR100JZHJ683 MCR10EZHFSR062 BD9B300MUV-EVK-001 MNR12ERAPJ100 RF1501TF3S MNR34J5ABJ221 BD9060HFP-EVK-001 BD9611MUV-EVK-001 BD9778HFP-TR BD9C601EFJ-EVK-001 BD9D321EFJ-EVK-101 BD9G341AEFJ-E2 BA7603F-E2 BD95820N-LB BD9A100MUV-EVK-001 BD9C401EFJ-EVK-001 BD9C501EFJ-EVK-001 BU90005GWZ-E2-EVK-101 BU4327G-TR 846-1001-KIT LA-401XD SLA560WBD2PT2 BH1790GLC-EVK-001 BD9B301MUV-EVK-101 BA7071F-E2