

Transistors

IMD14 General purpose (dual digital transistors)

IMD14

●Features


- 1) Two 500 mA digital transistor chips in a SMT package.
- 2) The drive transistors are independent, eliminating interference.

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	V _{CC}	50	V
Input voltage	V _{IN}	5 -5	V
Output current	I _C	500	mA
Power dissipation	P _d	300 (TOTAL)	mW *
Junction temperature	T _J	150	°C
Storage temperature	T _{stg}	-55~+150	°C

*200mW per element must not be exceeded. PNP type negative symbols have been omitted.


●External dimensions (Units : mm)

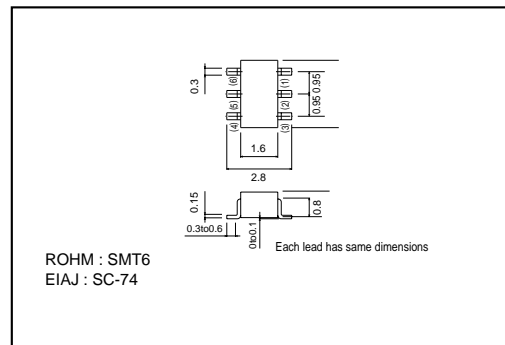

●Package, marking, and packaging specifications

Part No.	IMD14
Package	SMT6
Marking	D14
Code	T108
Basic ordering unit (pieces)	3000

●Equivalent circuit



●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V _{I (off)}	-	-	0.3	V	V _{CC} =5V , I _C =100μA
	V _{I (on)}	1.1	-	-		V _O =0.3V , I _C =50mA
Output voltage	V _{O (on)}	-	-	0.3	V	I _C /I _E =100mA/5mA
Input current	I _I	-	-	17	mA	V _I =3V
Output current	I _{O (off)}	-	-	0.5	μA	V _{CC} =50V , V _I =0V
DC current gain	G _I *1	82	-	-	-	I _C =100mA , V _O =5V *1
Transition frequency	f _T *2	-	250	-	MHz	V _{CE} =10V , I _E =-50mA , f=100MHz *2
Input resistance	R _I	154	220	286	Ω	-
Resistance ratio	R ₂ /R ₁	36.3	45.5	54.6	-	-

*1 Measured using pulse current *2 Transition frequency of the device
PNP type negative symbols have been omitted.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - Pre-Biased](#) category:

Click to view products by [ROHM](#) manufacturer:

Other Similar products are found below :

[RN1607\(TE85L,F\)](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#) [DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#)
[DTC124TETL](#) [DTC144ECA-TP](#) [DTC144VUAT106](#) [MUN5241T1G](#) [BCR158WH6327XTSA1](#) [NSBA114TDP6T5G](#) [NSBA143ZF3T5G](#)
[NSBC114YF3T5G](#) [NSBC123TF3T5G](#) [SMUN5235T1G](#) [SMUN5330DW1T1G](#) [SSVMUN5312DW1T2G](#) [RN1303\(TE85L,F\)](#)
[RN4605\(TE85L,F\)](#) [TTEPROTOTYPE79](#) [DDTC114EUAQ-7-F](#) [EMH15T2R](#) [SMUN2214T3G](#) [NSBC114TF3T5G](#) [NSBC143ZPDP6T5G](#)
[NSVMUN5113DW1T3G](#) [SMUN5230DW1T1G](#) [SMUN5133T1G](#) [SMUN2214T1G](#) [DTC114EUA-TP](#) [NSBA144EF3T5G](#)
[NSVDTA114EET1G](#) [2SC2223-T1B-A](#) [2SC3912-TB-E](#) [SMUN5237DW1T1G](#) [SMUN5213DW1T1G](#) [SMUN5114DW1T1G](#) [SMUN2111T1G](#)
[NSVDTC144EM3T5G](#) [DTC124ECA-TP](#) [DTC123TM3T5G](#) [DTA114ECA-TP](#) [DTA113EM3T5G](#) [DCX115EK-7-F](#) [DTC113EM3T5G](#)
[NSVMUN5135DW1T1G](#) [NSVMUN2237T1G](#) [NSVDTC143ZM3T5G](#)