
# 0402<1.0×0.6 t=0.2mm>

# **Low Current Type**

# SML-P11 Series

## PICOLED™-ECO



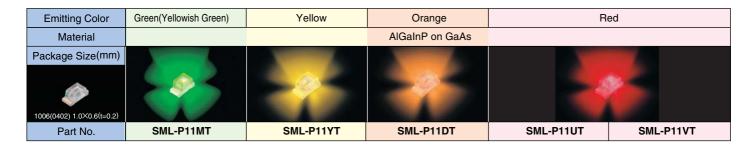

## ■ Absolute Maximum Ratings (Ta=25°C)


Part No.	Emitting color	Power dissipation Pp (mW)	Forward current IF (mA)	Peak forward current *IFP (mA)	Reverse voltage VR (V)	Operating temperature Topr ( C)	Storage temperature Tstg ( C)
SML-P11MT	Green (Yellowish Green)	54					
SML-P11YT	Yellow	52					
SML-P11DT	Orange	52	20	100	5	-40 to +85	-40 to +100
SML-P11UT	Red	50					
SML-P11VT	Red	50					

<sup>\*:</sup>Duty ≦1/10, 1kHz.


# **■**Electrical Optical Characteristics (Ta=25°C)

Part No.	Resin Color	Forward voltage V <sub>F</sub>		Reverse current I <sub>R</sub>		Light wavelength Dominant λD		Brightness Iv		
		Typ. (V)	lF (mA)	Max. (μA)	VR (V)	Typ. (nm)	lF (mA)	Min. (mcd)	Typ. (mcd)	lF (mA)
SML-P11MT	Transparent Colorless	1.9				569		0.63	2.1	
SML-P11YT		1.9				586		2.5	7.6	
SML-P11DT		1.8	1	100	4	605	1	2.5	7.3	1
SML-P11UT		1.8				621		1.6	5.5	
SML-P11VT		1.8				626		1.0	3.6	


# ■Dimensions (Unit:mm)

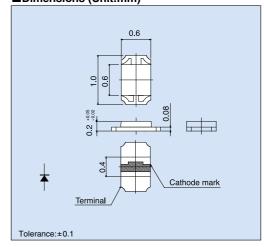

#### ■ Directivity (Typ.)

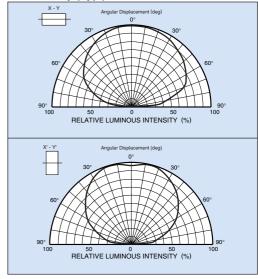



#### ■ Recommended Pad Layout



The recommended thickness of the screen mask for soldering is between 80 and 130µm. The hole size of the screen mask should be same as the recommended land pattern or smaller.


## ■ Packaging Specifications (Unit:mm)

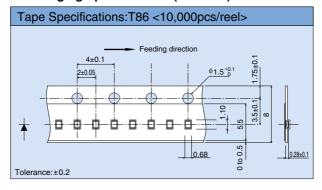




#### **■**Electrical Characteristic Curves

#### **Forward Current - Forward Voltage**






#### **Relative Luminous Intensity - Case Temperature**






## **Relative Luminous Intensity - Forward Current**






#### Ratio of Maximum Tolerable Peak Current - Pulse Duration



SML-P11MT
SML-P11YT
SML-P11DT
SML-P11UT
SML-P11VT

# Derating





#### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
  means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
  use and operation. Please pay careful attention to the peripheral conditions when designing circuits
  and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
  otherwise dispose of the same, no express or implied right or license to practice or commercially
  exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

**ROHM** Customer Support System

THE AMERICAS / EUPOPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO.,LTD.

ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

pan TEL:+81-75-311-2121 FAX:+81-75-315-0172



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - SMD category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

LTST-C190KYKT LTST-C19GD2WT LTST-N683GBEW LTW-170ZDC LTW-M140SZS40 598-8110-100F 598-8170-100F 598-8610202F 67-22VRVGC/TR8 AAAF5060QBFSEEZGS HLMA-QG00-S0021 HLMP-6305-L0011 ALMD-LB36-SV002 APT1608QGW 1521UYC/S530-A3/TR8 EAST2012YA0 EASV1803BA0 LG M67K-H1J2-24-0-2-R18-Z LS A676-P2S1-1 SML310BATT86 SML512VWT86A SML-LX0606SISUGC/A SML-LXL1307SRC-TR SML-LXR851SIUPGUBC LT1ED53A FAT801-S AM27ZGC03
APB3025SGNC APFA3010SURKCGKQBDC APHK1608VGCA APT2012QGW CLX6D-FKB-CN1R1H1BB7D3D3 LTST-C250KGKT
LTW-020ZDCG LTW-21TS5 LTW-220DS5 JANTXM19500/521-02 UYGT801-S 42-21UYC/S530-A3/TR8 LO T67F-V1AB-24-1
YGFR411-H 598-8330-117F SML-LX0402IC-TR CMDA20AYAA7D1S CMDA16AYDR7A1X 598-8040-100F 598-8070-100F 598-8140100F 598-8610-200F EAST2012GA0