Zener diode UMZ16N

Applications


Voltage regulation (common anode configuration)


Features

Small mold type. (UMD3)
 High reliability


Construction

Silicon epitaxial planar







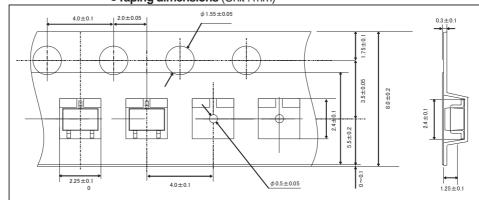

•Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power dissipation (*1)	Р	200	mW
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C


(*1) Rating of per diode

•Electrical characteristic (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Zener voltage	Vz	15.85	-	16.51	V	I _Z =5mA
Reverse current	I _R	-	-	0.10	μA	V _R =12V
Dinamic impedance	Zz	-	-	50	Ω	I _Z =5mA
Zenerimpedance	Z _{Zk}	-	-	80	Ω	I _Z =0.5mA



Diodes

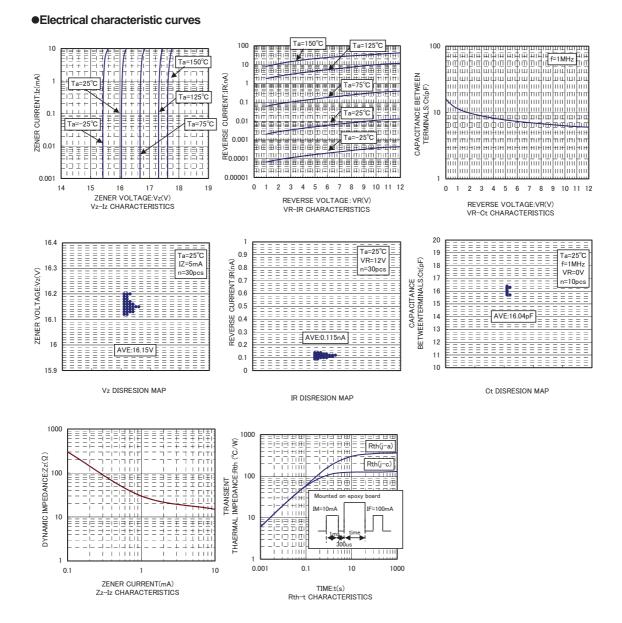

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

ROHM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Zener Diodes category:

Click to view products by ROHM manufacturer:

Other Similar products are found below :

 RKZ13B2KG#P1
 DL5234B
 EDZTE6113B
 1N4682
 1N4691
 1N4693
 1N4732A
 1N4733A-TR
 1N4736A
 1N4750A
 1N4759ARL
 1N5241B

 1N5365B
 1N5369B
 1N747A
 1N959B
 1N964B
 1N966B
 1N968B
 1N972B
 NTE5116A
 NTE5121A
 NTE5147A
 NTE5152A

 NTE5155A
 NTE5164A
 JANS1N4974US
 1N4692
 1N4702
 1N4704
 1N4711
 1N4737A
 1N4745ARL
 1N4752A

 1N4752ARL
 1N5221B
 1N5236B
 1N5241BTR
 1N5242BTR
 1N5350B
 1N5352B
 1N961BRR1
 1N964BRL
 RKZ5.1BKU#P6

 3SMAJ5950B-TP
 3SMBJ5925B-TP
 3SMBJ5925B-TP
 1N5242BTR
 1N5350B
 1N5352B
 1N961BRR1
 1N964BRL
 RKZ5.1BKU#P6