

## KM 系列

特长 / 用途


- 105 C、2,000小时寿命保证
- 105 C一般用途之制品
- 符合RoHS指令



### 规格表

| 项 目  | 性 能  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|--|--|---|--|---|------|------|------------|------|----|-----|-----|-----|-----|-----|-----|-----|--|
| 工作温度范围   | 6.3~400V   | 450V  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | -40 C ~ +105 C   | -25 C ~ +105 C  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 额定静电容量容许误差值  | ± 20% (120 Hz, 20 C)   |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 漏电流(20 C)  | 额定电压   | <table border="1"> <tr> <td>≦ 100V</td> <td>&gt; 100V</td> </tr> </table> | ≦ 100V   | > 100V                                      |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | ≦ 100V   | > 100V  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 测试时间   | <table border="1"> <tr> <td>2 分钟后</td> <td>5 分钟后</td> </tr> </table>      | 2 分钟后  | 5 分钟后                                       |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 2 分钟后  | 5 分钟后   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 漏电流  | <table border="1"> <tr> <td><math>I = 0.01CV</math> 或 <math>3(\mu A/微安)</math><br/>之中任一较大值以下</td> <td><math>CV \leq 1,000</math><br/><math>I = 0.03CV + 15(\mu A/微安)</math></td> <td><math>CV &gt; 1,000</math><br/><math>I = 0.02CV + 25(\mu A/微安)</math></td> </tr> </table> | $I = 0.01CV$ 或 $3(\mu A/微安)$<br>之中任一较大值以下                                 | $CV \leq 1,000$<br>$I = 0.03CV + 15(\mu A/微安)$ | $CV > 1,000$<br>$I = 0.02CV + 25(\mu A/微安)$ |      |      |            |      |    |     |     |     |     |     |     |     |  |
| $I = 0.01CV$ 或 $3(\mu A/微安)$<br>之中任一较大值以下                          | $CV \leq 1,000$<br>$I = 0.03CV + 15(\mu A/微安)$   | $CV > 1,000$<br>$I = 0.02CV + 25(\mu A/微安)$                               |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| I = 漏电流( $\mu A/微安$ )、C = 额定静电容量( $\mu F/微法拉$ )、V = 额定直流工作电压(V/伏特) |  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 损失角正切值(120 Hz, 20 C)   | 额定电压   | 6.3 10 16 25 35 50 63 100 160 200 250 350 400 450                         |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 损失角正切值<br>(最大值)  | 0.23 0.20 0.16 0.14 0.12 0.10 0.09 0.08 0.12 0.14 0.17 0.20 0.25 0.25     |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 当额定静电容量大于1,000 微法拉时, 每增加1,000 微法拉需加0.02                            |  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 温度特性(120 Hz)   | 阻抗比不可大于下表所列数值  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 额定电压   |   | 6.3  | 10  | 16   | 25   | 35         | 50   | 63 | 100 | 160 | 200 | 250 | 350 | 400 | 450 |  |
|  | 阻抗比  | Z(-25 C)  | $\phi D < 16$                                  | 4   | 3    | 3    | 2          | 2    | 2  | 2   | 3   | 6   | 8   | 12  | 14  | 16  |  |
|  |  | Z(+20 C)  | $\phi D \geq 16$                               | 6   | 4    | 4    | 3          | 3    | 3  | 3   | 4   | 8   | 10  | 16  | 18  | -   |  |
| Z(-40 C)   | $\phi D < 16$  | 8   | 6  | 6   | 4    | 4    | 3          | 3    | 4  | 8   | 10  | 16  | 18  | -   |     |     |  |
| Z(+20 C)   | $\phi D \geq 16$   | 12  | 10   | 8   | 8    | 8    | 8          | 6    | 6  | 4   | 8   | 10  | 16  | 18  | -   |     |  |
| 耐久性  | 保证寿命时间   | 2,000 小时  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 静电容量变化率  | $\leq$ 初始值的 $\pm 20\%$  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 损失角正切值   | $\leq$ 初始规格值的 200%  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 漏电流  | $\leq$ 初始规格值  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | * 于 105 C 环境中供给容许纹波电流值与额定电压 2,000 小时后, 待制品回复至 20 C 的环境中进行量测时, 需满足上列要求  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 高温无负荷特性  | 保证寿命时间   | 1,000 小时  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 静电容量变化率  | $\leq$ 初始值的 $\pm 20\%$  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 损失角正切值   | $\leq$ 初始规格值的 200%  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | 漏电流  | $\leq$ 初始规格值  |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
|  | * 于 105 C 环境中不供给额定电压 1,000 小时后, 待制品回复至 20 C 的环境中进行量测时, 需满足上列要求 额定电压 160 ~ 450V 需进行电压补偿后再行量测(依据 JIS C 5101-4 4.1 规定)  |   |  |   |      |      |            |      |    |     |     |     |     |     |     |     |  |
| 纹波电流与频率补正系数  | 频率(Hz)   |   | 60 (50)  | 120   | 500  | 1k   | 10k $\leq$ |      |    |     |     |     |     |     |     |     |  |
|  | 静电容量( $\mu F/微法拉$ )  |   | $\leq 100$                                     | 0.70  | 1.00 | 1.30 | 1.40       | 1.50 |    |     |     |     |     |     |     |     |  |
|  |  |   | $100 < \text{静电容量} \leq 1,000$                 | 0.75  | 1.00 | 1.20 | 1.30       | 1.35 |    |     |     |     |     |     |     |     |  |
|  |  |   | $1,000 <$                                      | 0.80  | 1.00 | 1.10 | 1.12       | 1.15 |    |     |     |     |     |     |     |     |  |

### 寸法图

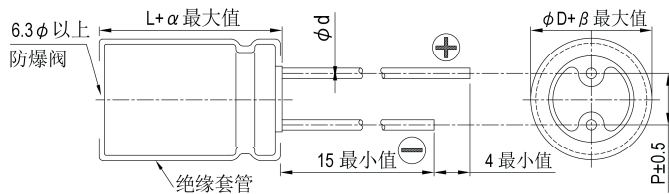


制品各项寸法

单位 毫米

|          | 5                             | 6.3 | 8   | 10  | 12.5 | 16  | 18  | 22  | 25   |
|----------|-------------------------------|-----|-----|-----|------|-----|-----|-----|------|
| $\phi D$ | 5                             | 6.3 | 8   | 10  | 12.5 | 16  | 18  | 22  | 25   |
| P        | 2.0                           | 2.5 | 3.5 | 5.0 | 5.0  | 7.5 | 7.5 | 10  | 12.5 |
| $\phi d$ | 0.5                           |     | 0.6 |     |      | 0.8 |     | 1.0 |      |
| $\alpha$ | $L < 20: 1.5, L \geq 20: 2.0$ |     |     |     |      |     |     |     | 2.0  |
| $\beta$  | 0.5                           |     |     |     |      |     |     |     |      |

制品尺寸如为 12.5×16、16×16、16×20、18×16、18×20、18×25 适用下列制品图

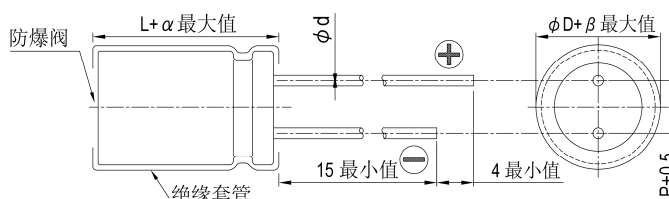



尺寸 直径( $\phi D$ ) $\times$ 长度(L), (毫米/mm)  
 制品尺寸与容许纹波电流一览表 容许纹波电流 毫安/均方根值(mA/rms), 120 赫兹(Hz), 105 C

| 额定电压 V <sub>dc</sub><br>内容<br>静电容<br>( $\mu F$ /微法拉) |     | 6.3V (0J)         |       | 10V (1A)          |       | 16V (1C)          |       | 25V (1E)          |       | 35V (1V)          |       | 50V (1H)          |       | 63V (1J)          |       | 100V (2A)         |       |
|--|-----|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
|  |     | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    |
| 2.2  | 2R2 |                   |       |                   |       |                   |       |                   |       |                   |       | 5x11              | 20    |                   |       | 5x11              | 30    |
| 3.3  | 3R3 |                   |       |                   |       |                   |       |                   |       |                   |       | 5x11              | 30    |                   |       | 5x11              | 31    |
| 4.7  | 4R7 |                   |       |                   |       |                   |       |                   |       |                   |       | 5x11              | 33    |                   |       | 5x11              | 36    |
| 10   | 100 |                   |       |                   |       |                   |       |                   |       |                   |       | 5x11              | 50    |                   |       | 6.3x11            | 54    |
| 22   | 220 |                   |       |                   |       |                   |       |                   |       |                   |       | 5x11              | 78    | 6.3x11            | 86    | 6.3x11            | 93    |
| 33   | 330 |                   |       |                   |       |                   |       |                   |       | 5x11              | 75    | 5x11              | 90    | 6.3x11            | 100   | 8x11.5            | 130   |
| 47   | 470 |                   |       |                   |       |                   |       | 5x11              | 97    | 5x11              | 90    | 6.3x11            | 120   | 6.3x11            | 130   | 10x12.5           | 165   |
| 100  | 101 |                   |       |                   |       | 5x11              | 110   | 6.3x11            | 142   | 6.3x11            | 150   | 8x11.5            | 188   | 10x12.5           | 235   | 10x20             | 265   |
| 220  | 221 | 5x11              | 140   | 6.3x11            | 175   | 6.3x11            | 190   | 8x11.5            | 236   | 8x11.5            | 270   | 10x12.5           | 300   | 10x16             | 335   | 12.5x25           | 440   |
| 330  | 331 |                   |       | 6.3x11            | 200   | 8x11.5            | 270   | 8x11.5            | 310   | 10x12.5           | 350   | 10x16             | 410   | 10x20             | 510   | 16x25             | 620   |
| 470  | 471 | 6.3x11            | 230   | 8x11.5            | 290   | 8x11.5            | 310   | 10x12.5           | 380   | 10x16             | 460   | 10x20             | 530   | 12.5x20           | 640   | 16x31.5           | 715   |
| 1,000  | 102 | 8x11.5            | 380   | 10x12.5           | 460   | 10x16             | 560   | 10x20             | 680   | 12.5x20           | 810   | 12.5x25           | 950   | 16x25             | 930   | 18x40             | 1,275 |
| 2,200  | 222 | 10x16             | 690   | 10x20             | 760   | 12.5x16           | 780   | 12.5x25           | 1,110 | 16x25             | 1,260 | 16x35.5           | 1,470 | 18x40             | 2,280 | 25x45             | 2,400 |
| 3,300  | 332 | 10x20             | 840   | 12.5x20           | 1,100 | 12.5x25           | 1,170 | 16x25             | 1,440 | 16x31.5           | 1,420 | 18x35.5           | 1,770 | 22x40             | 2,510 |                   |       |
| 4,700  | 472 | 12.5x16           | 850   | 16x16             | 940   | 16x16             | 950   | 18x20             | 1,220 | 18x25             | 1,570 |                   |       |                   |       |                   |       |
| 6,800  | 682 | 12.5x20           | 1,090 | 16x16             | 1,010 | 12.5x25           | 1,260 | 16x20             | 1,185 | 16x31.5           | 1,650 |                   |       |                   |       |                   |       |
| 10,000   | 103 | 16x20             | 1,340 | 16x16             | 1,060 | 18x16             | 1,290 | 18x25             | 1,550 | 18x35.5           | 1,900 | 22x40             | 2,340 | 25x40             | 3,000 |                   |       |
| 15,000   | 153 | 16x20             | 1,340 | 16x20             | 1,270 | 16x31.5           | 1,930 | 16x40             | 2,000 | 18x40             | 2,250 | 25x40             | 2,530 |                   |       |                   |       |
| 22,000   | 223 | 16x20             | 1,340 | 16x31.5           | 2,220 | 18x20             | 1,585 | 18x35.5           | 2,160 |                   |       |                   |       |                   |       |                   |       |
| 33,000   | 333 | 16x31.5           | 2,365 | 18x25             | 1,800 | 18x31.5           | 2,330 | 18x45             | 2,410 |                   |       |                   |       |                   |       |                   |       |
|  |     | 16x40             | 2,800 | 18x31.5           | 2,620 | 18x40             | 2,950 | 25x40             | 3,200 |                   |       |                   |       |                   |       |                   |       |
|  |     | 18x35.5           | 2,930 | 18x40             | 3,230 | 22x40             | 3,460 |                   |       |                   |       |                   |       |                   |       |                   |       |
|  |     | 18x45             | 3,080 | 22x40             | 4,090 | 25x45             | 4,500 |                   |       |                   |       |                   |       |                   |       |                   |       |

| 额定电压 V <sub>dc</sub><br>内容<br>静电容<br>( $\mu F$ /微法拉) |     | 160V (2C)         |       | 200V (2D)         |       | 250V (2E)         |       | 350V (2V)         |       | 400V (2G)         |     | 450V (2W)         |     |
|--|-----|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-----|-------------------|-----|
|  |     | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA    | $\phi D \times L$ | mA  | $\phi D \times L$ | mA  |
| 1  | 010 |                   |       |                   |       |                   |       |                   |       | 6.3x11            | 21  | 8x11.5            | 27  |
| 2.2  | 2R2 |                   |       | 6.3x11            | 30    | 6.3x11            | 35    | 6.3x11            | 35    | 8x11.5            | 39  | 8x11.5            | 39  |
| 3.3  | 3R3 |                   |       | 6.3x11            | 39    | 6.3x11            | 40    | 8x11.5            | 43    | 8x11.5            | 45  | 8x11.5            | 45  |
| 4.7  | 4R7 |                   |       | 6.3x11            | 43    | 8x11.5            | 45    | 8x11.5            | 45    | 8x11.5            | 50  | 8x11.5            | 50  |
| 10   | 100 | 8x11.5            | 65    | 8x11.5            | 65    | 10x12.5           | 92    | 10x16             | 95    | 10x16             | 95  | 10x20             | 105 |
| 22   | 220 | 10x12.5           | 110   | 10x16             | 140   | 10x16             | 140   | 12.5x20           | 220   | 12.5x20           | 160 | 12.5x20           | 160 |
| 33   | 330 | 10x16             | 150   | 10x20             | 170   | 12.5x16           | 175   | 12.5x25           | 215   | 16x20             | 225 | 16x20             | 225 |
| 47   | 470 | 10x20             | 195   | 12.5x16           | 215   | 16x16             | 205   | 16x20             | 255   | 16x25             | 295 | 16x25             | 280 |
| 68   | 680 | 12.5x20           | 275   | 12.5x20           | 265   | 16x20             | 320   | 16x20             | 245   | 16x25             | 295 | 18x20             | 285 |
| 100  | 101 | 12.5x25           | 355   | 16x16             | 290   | 16x25             | 360   | 18x25             | 360   | 16x25             | 295 | 16x25             | 280 |
| 150  | 151 | 16x25             | 470   | 16x20             | 365   | 16x25             | 425   | 16x31.5           | 370   | 16x31.5           | 375 | 16x31.5           | 420 |
| 220  | 221 | 16x25             | 470   | 18x16             | 360   | 18x20             | 415   | 18x31.5           | 460   | 18x35.5           | 540 | 18x35.5           | 400 |
| 330  | 331 | 18x25             | 510   | 18x20             | 360   | 18x20             | 415   | 16x35.5           | 430   | 18x35.5           | 540 | 18x40             | 560 |
| 470  | 471 | 16x31.5           | 660   | 18x20             | 510   | 16x31.5           | 550   | 18x40             | 600   | 22x40             | 730 | 22x40             | 770 |
|  |     | 18x31.5           | 750   | 18x20             | 510   | 18x35.5           | 535   | 18x40             | 600   | 22x40             | 730 | 22x40             | 770 |
|  |     | 18x40             | 965   | 18x31.5           | 750   | 18x35.5           | 760   | 25x40             | 865   | 22x45             | 930 |                   |     |
|  |     | 18x45             | 1,130 | 22x40             | 1,130 | 22x40             | 1,140 | 25x45             | 1,070 |                   |     |                   |     |
|  |     | 22x40             | 1,130 | 22x40             | 1,130 | 25x40             | 1,325 |                   |       |                   |     |                   |     |

产品编码说明

KM系列      6.3V      470微法拉       $\pm 20\%$       6.3 $\phi \times 11L$   
**KM**      **0J**      **471**      **M**      **0611**  
 系列      额定电压      额定静电容      额定静电容容许误差值      制品尺寸

|            |     |     |     |     |     |     |     |     |     |    |     |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|
| 额定电压 (W.V) | 4   | 6.3 | 10  | 16  | 20  | 25  | 35  | 50  | 63  | 80 | 100 |
| 电压代码       | 0G  | 0J  | 1A  | 1C  | 1D  | 1E  | 1V  | 1H  | 1J  | 1K | 2A  |
| 额定电压 (W.V) | 160 | 180 | 200 | 250 | 315 | 350 | 400 | 420 | 450 |    |     |
| 电压代码       | 2C  | 2S  | 2D  | 2E  | 2F  | 2V  | 2G  | 2P  | 2W  |    |     |



| 序号 | 系列 | 规格        |                    | 容量范围                              | 损失角                                  | 漏电流                                  | 承制方部品号       | 尺寸           | 最大纹波电流  |
|----|----|-----------|--------------------|-----------------------------------|--------------------------------------|--------------------------------------|--------------|--------------|---|
|    |    | WV<br>(V) | Cap.<br>( $\mu$ F) | Cap. tol.<br>(%)<br>120Hz<br>20°C | DF<br>(%)<br>120Hz<br>20°C<br>$\leq$ | LC<br>( $\mu$ A)<br>(2min)<br>$\leq$ | 料号           | D $\Phi$ *L  | Allowable ripple<br>current (mA rms)<br>at 105°C, 120Hz |
| 1  | KM | 10        | 100                | $\pm 20$                          | 20                                   | 10                                   | KM1A101M0507 | $\Phi 5*7$   | 85  |
| 2  | KM | 10        | 470                | $\pm 20$                          | 20                                   | 47                                   | kM1A471M0611 | $\Phi 6*11$  | 220   |
| 3  | KM | 10        | 1000               | $\pm 20$                          | 20                                   | 100                                  | KM1A102M0812 | $\Phi 8*12$  | 360   |
| 4  | KM | 16        | 1000               | $\pm 20$                          | 16                                   | 160                                  | KM1C102M0816 | $\Phi 8*16$  | 420   |
| 5  | KM | 16        | 1000               | $\pm 20$                          | 16                                   | 160                                  | KM1C102M1016 | $\Phi 10*16$ | 560   |
| 6  | KM | 16        | 470                | $\pm 20$                          | 16                                   | 75                                   | KM1C471M0812 | $\Phi 8*12$  | 310   |
| 7  | KM | 25        | 22                 | $\pm 20$                          | 14                                   | 6                                    | KM1E220M0407 | $\Phi 4*7$   | 48  |
| 8  | KM | 25        | 100                | $\pm 20$                          | 14                                   | 250                                  | KM1E101M0611 | $\Phi 6*11$  | 142   |
| 9  | KM | 25        | 47                 | $\pm 20$                          | 14                                   | 11                                   | KM1E470M0507 | $\Phi 5*7$   | 80  |
| 10 | KM | 25        | 47                 | $\pm 20$                          | 14                                   | 11                                   | KM1E470M0511 | $\Phi 5*11$  | 97  |
| 11 | KM | 25        | 220                | $\pm 20$                          | 14                                   | 55                                   | KM1E221M0611 | $\Phi 6*11$  | 236   |
| 12 | KM | 25        | 470                | $\pm 20$                          | 14                                   | 117                                  | KM1E471M0812 | $\Phi 8*12$  | 305   |
| 13 | KM | 25        | 470                | $\pm 20$                          | 14                                   | 117                                  | KM1E471M1013 | $\Phi 10*13$ | 380   |
| 14 | KM | 35        | 100                | $\pm 20$                          | 12                                   | 35                                   | KM1V101M0611 | $\Phi 6*11$  | 150   |
| 15 | KM | 35        | 100                | $\pm 20$                          | 12                                   | 35                                   | KM1V101M0611 | $\Phi 8*12$  | 220   |
| 16 | KM | 35        | 220                | $\pm 20$                          | 12                                   | 77                                   | KM1V221M0812 | $\Phi 8*12$  | 270   |
| 17 | KM | 35        | 330                | $\pm 20$                          | 12                                   | 116                                  | KM1V331M1013 | $\Phi 10*13$ | 350   |
| 18 | KM | 35        | 470                | $\pm 20$                          | 12                                   | 165                                  | KM1V471M1013 | $\Phi 10*16$ | 460   |
| 19 | KM | 50        | 4.7                | $\pm 20$                          | 10                                   | 3                                    | KM1H4R70405  | $\Phi 4*5$   | 16  |
| 20 | KM | 50        | 4.7                | $\pm 20$                          | 10                                   | 3                                    | KM1H4R70407  | $\Phi 4*7$   | 18  |
| 21 | KM | 50        | 10                 | $\pm 20$                          | 10                                   | 5                                    | KM1H100M0511 | $\Phi 5*11$  | 50  |
| 22 | KM | 50        | 100                | $\pm 20$                          | 10                                   | 50                                   | KM1H101M0812 | $\Phi 8*12$  | 188   |
| 23 | KM | 50        | 22                 | $\pm 20$                          | 10                                   | 11                                   | KM1H220M0511 | $\Phi 5*11$  | 78  |
| 24 | KM | 50        | 220                | $\pm 20$                          | 10                                   | 110                                  | KM1H221M1013 | $\Phi 10*13$ | 300   |
| 25 | KM | 50        | 47                 | $\pm 20$                          | 10                                   | 23                                   | KM1H470M0611 | $\Phi 6*11$  | 120   |
| 26 | KM | 50        | 470                | $\pm 20$                          | 10                                   | 230                                  | KM1H471M1020 | $\Phi 10*20$ | 530   |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [ROQANG](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)  
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)  
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)  
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#)  
[NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)