


Description

Cable: RG 316/U
 Connector Combination; N (m) str / SMB (f) str
 Length in millimeters: XXXXX (mm)

RoHS / REACH Compliant

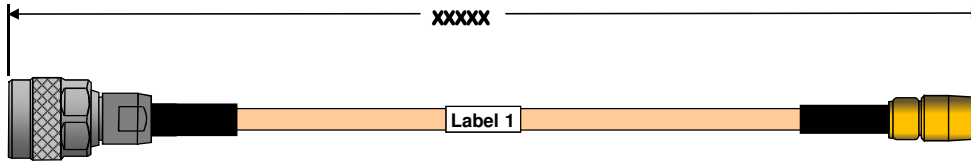

General Electrical Specifications

Impedance: 50 ± 2 Ohms
 Operating Frequency: DC to 4 GHz
 Return Loss: ≥ 15 dB Min
 Cable Insertion Loss: 2.10 dB/ m @ 4 GHz
 Velocity of Propagation (%): 70% nominal
 Working Voltage: 250 Volts rms

Mechanical Specifications

Cable Diameter: 2.5 mm nominal (over jacket)
 Minimum Bend Radius: Installation; 25 mm
 Mating Cycles: Min 500
 Temperature Range: -45° C to 85° C
 Connector Interface:

N: IEC 60169-16
 MIL PRF-39012
 CECC22210
 SMB IEC 60169-10
 MIL PRF-39012
 CECC22130

Materials and Finishes

Cable: Center Conductor; Stranded Silver Plated Copper
 Dielectric; PTFE
 Shield; Copper Wire Braid
 Jacket; FEP

Connector Types, Material & Plating:

SMB Center Contact; BeCu / Gold Plated
 Outer Contact; BeCu / Gold Plated
 Body: Brass / Gold Plated
 Dielectric Material; PTFE
 N: Center Contact; Spring Bronze / Gold Plated
 Outer Contact; Brass / Flash White Bronze over silver
 Body; Brass / Flash White Bronze over silver
 Dielectric Material; PTFE
 Gasket: Silicone Rubber

Strian relief Heat Shrink Tubing: Polyolefin

Part Number Order Number			End to End Length [mm]	Label marking content
02J-53S1-59K1-01219			1219	Rosenberger NA 02J-53S1-59K1-01219 wwyy

Dimensions are in Millimeters	Rosenberger® Rosenberger of North America, LLC	
Prepared by: John Lippert	DRG NO. 02J-53S1-59K1	Rev A
Released Date: 10/14/2016	SHT 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Rosenberger](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-](#)
[COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#)
[GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-](#)
[1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#)