
TECHNICAL DATA SHEET

Rosenberger®

7/16 50Ω

ATTENUATOR PLUG/JACK

60AS120-K06N1

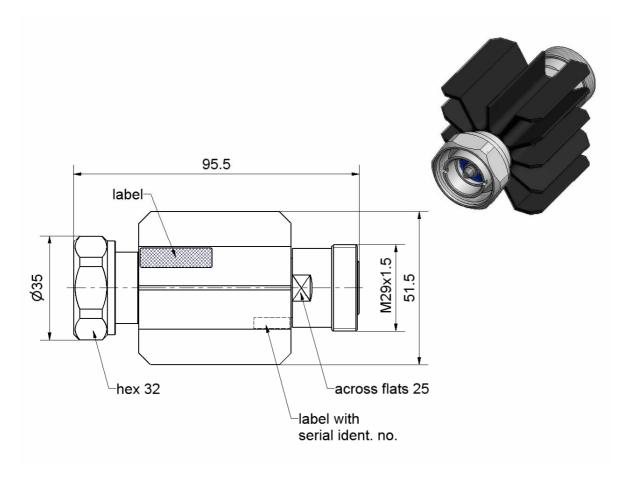

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 60169-4, VG 95250, EN 122190, DIN 47223

Documents

N/A

Material and plating

Connector parts	Material	Plating
Center contact - plug	Brass	Silver, 3-6 μm
Center contact - jack	Beryllium copper	Silver, 3-6 μm
Outer contact	Brass	Flash white bronze over silver(e.g. Optargen®)
Body	Brass	Flash white bronze over silver(e.g. Optargen®)
Heatsink	Al	black anodised
Coupling nut	Brass	Flash white bronze over silver(e.g. Optargen®)
Dielectric	PPE	
Substrate	ALN	

Rosenberger Hochfrequenztechnik GmbH & Co. KG D-84526 Tittmoning Germany

Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de

RF_35/08.06/4.0

TECHNICAL DATA SHEET



7/16 50Ω

ATTENUATOR PLUG/JACK

60AS120-K06N1

Electrical data

Impedance 50Ω Frequency

DC to 8 GHz Return loss \geq 30.7 dB, DC to 1 GHz

> \geq 26.4 dB, 1 GHz to 2 GHz \geq 20.0 dB, 2 GHz to 8 GHz

Attenuation 6 dB

Tolerances $\leq \pm$ 0.3 dB, DC to 2 GHz

 $\leq \pm$ 0.4 dB, 2 GHz to 4 GHz \leq \pm 0.8 dB, 4 GHz to 8 GHz

Center contact resistance \leq 4.0 m Ω \leq 1.5 m Ω Outer contact resistance 20 W at 25°C Power handling

derated linearity to 0 Watts at 125°C

Mechanical data

Mating cycles min. 500 Coupling nut retention \geq 1000 N Center contact captivation \geq 200 N Coupling test torque max. 35 Nm Recommended torque 25 Nm to 30 Nm

Environmental data

Temperature range -65°C to +85°C

2002/95/EC (RoHS) compliant

Tooling

N/A

Suitable cables

N/A

Packing

Standard 1 pce in bag 270 g/pce Weight

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Kerstin Herzog	29/03/05	Frank Weiß	07/07/08		c00	08-0348	Kerstin Hobrak	08/07/08
Rosenberger Hochfrequenztechnik GmbH & Co. KG					Tel.: +49 8684 18-0			
P.O.Box 1260 D-84526 Tittmoning Germany				1 1	Fax: +49 8684 18-499			
<u>www.rosenberger.de</u>			er	nail: <u>info@rosenberger.de</u>		2/2		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Attenuators - Interconnects category:

Click to view products by Rosenberger manufacturer:

Other Similar products are found below:

```
R411803119 R413806115 R413808000 R413810115 R413850115 R414510000 R414701000 BNC-13 R411800121 R411801121 R412412124 R412450000 R413800000 R413805000 R413830000 R413840115 R414730000 R415420000 R415703000 R416010000 R420003110 R411801000 R411815121 R413305000 R413801000 R414520000 R411808121 R412500124 R412414124 R412501124 HMC-C584 R413802000 R412400124 R411700124 R417310130 R411801119 R412419124 R411703124 R412401124 R443131000 R417130110 R414700000 R414505000 R411802119 R417720128 R420706110 R413811000 R413803115 R414501000 R417903128
```