


Cable Assembly Specification

Rosenberger NA p/n: L71-802-XXX

Rosenberger[®]
Rosenberger of North America, LLC

RoHS Compliant

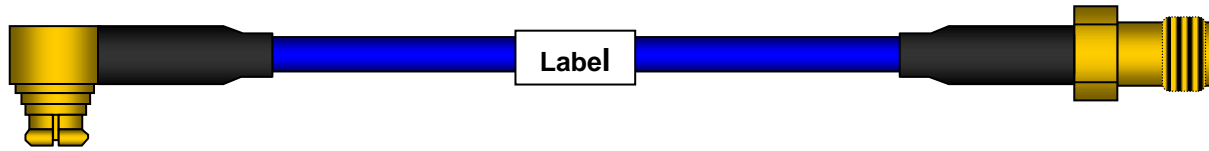

Description

Rosenberger: Cable: RTK-FS 085-FEP/SPCW

Connector Combination: SMP female right angle / SMA+ female straight

Length in millimeters: XXX

General Electrical Specifications

Impedance:	50 ± 2 Ohms
Operating Frequency:	DC to 26 GHz
Return Loss:	14 dB min up to 26 GHz
Cable Insertion Loss:	4.8 dB/m @ 26 GHz (typical)
Velocity of Propagation:	70% nominal
Shielding Effectiveness:	>100 dB @ 1GHz
Working Voltage:	850 Vrms

Mechanical Specification

Cable Diameter:	2.64 mm nominal
Minimum Bend Radius:	6 mm
Mating Torque: SMA+	8.1 Nm to 13 Nm
Engagement/Disengagement Force:	45 N max / 9 N min – Limited Detent Mating
SMP	Connector
Mating Cycles: SMP / SMA+	> 500
Temperature Range:	-55°C to +125°C

MATERIALS AND FINISHES

Cable:	RTK-FS 085-FEP; SCPW Center Conductor, Per MIL-STD-348 Hybrid
Connector Interface:	
Connector Types, Material & Plating:	SMA+: Outer contact: gold plated beryllium copper or equivalent Dielectric: PTFE Center contact: gold plated brass
	SMP: Outer & center contact: gold plated beryllium copper or equivalent Dielectric: PTFE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Rosenberger](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)