


Description

Cable: Belden 9913F7
 Connector Combination; N (m) str / N (m) str
 Length in millimeters: XXXXX (mm)

RoHS / REACH Compliant

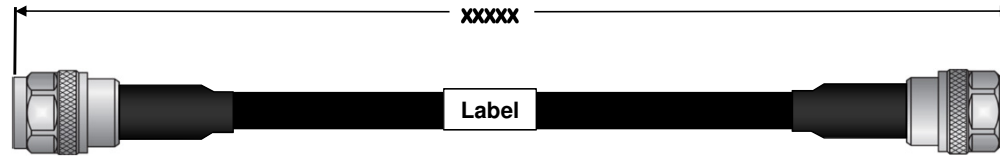

General Electrical Specifications

Impedance: 50 ± 2 Ohms
 Operating Frequency: DC to 5.8 GHz
 Return Loss: ≥ 14 dB ; DC to 5.8 GHz
 Cable Insertion Loss: 39.7 dB/ 100m @ 4 GHz
 Connector Insertion Loss: N: ≤ 0.05 dB
 Velocity of Propagation (%): 85% nominal
 Working Voltage: 500 Volts rms
 Power , typical, cable only: 157 Watts @ 4 GHz

Mechanical Specifications

Cable Diameter: 10.29 mm nominal (over jacket)
 Minimum Bend Radius: Installation; 76.2 mm
 Mating Cycles: Min 500
 Temperature Range: -40° C to 80° C
 Connector Interface:

N: IEC 60169-16
 MIL PRF-39012
 CECC22210

Materials and Finishes

Cable: Center Conductor; Stranded Copper
 Dielectric; Foam PE
 Shield (Foil); Bonded Aluminum Foil Polyester Tape
 Shield (Braid); Tinned Copper
 Jacket; PVC Blend / Black

Connector Types, Material & Plating:

N: Center Contact; Spring Bronze / Gold Plated
 Outer Contact; Brass / Flash White Bronze over silver
 Body; Brass / Flash White Bronze over silver
 Dielectric Material; PTFE
 Gasket: Silicone Rubber

Strian relief Heat Shrink Tubing: Polyolefin

Part Number Order Number			End to End Length [mm]	Label marking content
N9J-53S1-53S1-00914			914	Rosenberger NA N9J-53S1-53S1-00914 wwyy
N9J-53S1-53S1-01219			1219	Rosenberger NA N9J-53S1-53S1-01219 wwyy
N9J-53S1-53S1-01524			1524	Rosenberger NA N9J-53S1-53S1-01524 wwyy

Dimensions are in Millimeters	Rosenberger®	
Prepared by: John Lippert	Rosenberger of North America, LLC	
Released Date: 9/7/2016	DRG NO. N9J-53S1-53S1	Rev A
SHT 1 OF 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Rosenberger](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-](#)
[COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#)
[GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-](#)
[1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#)