



MECHANICAL SPECIFICATION




ALL DIMENSIONS MILLIMETRES

ELECTRICAL SPECIFICATION

RATED VOLTAGE 250V AC
 LINE FREQUENCY DC TO 440Hz
 TEMPERATURE RANGE -25 TO +85DegC
 TEST VOLTAGE 2.0kV DC
 MOUNTING EN 50 022 (TOP HAT) &
 EN 50 035 (G PROFILE)
 SCREW TERMINALS 2.5sq.mm (12 AWG)



ELECTRICAL SCHEMATIC

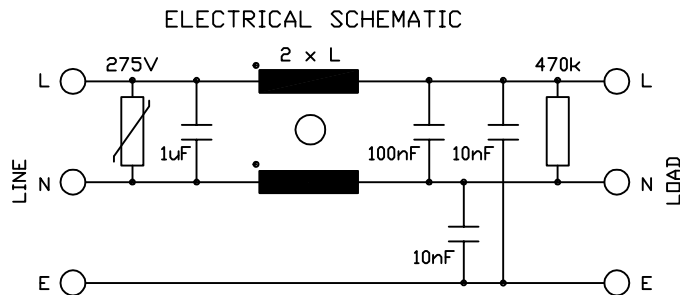

PRODUCT RANGE

TYPE	CURRENT I(Amps) @ 40°C	INDUCTANCE L(mH)	RESISTANCE (R) PER WINDING
DRF01	1.0	18	640
DRF03	3.0	3.2	71
DRF06	6.0	1.4	19
DRF08	8.0	1.5	15
DRF10	10.0	0.85	12

DrgNo DRFXX-GS

TITLE 1 PHASE 250V DIN RAIL MOUNTED FILTER

ALL DIMENSIONS IN MM
 ANGLES IN DECIMAL DEGREES

ROXBURGH EMC  ISSUE 3

GENERAL SPECIFICATION
 FOR DRFXX

CUSTOMER

REFERENCE

Aprvd Date 07/03/03

Aprvd By JRT

Drwn by SW

Scale:

Sheet 1 / 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [roxburgh](#) manufacturer:

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [KMF3100](#) [RIS0622H2](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [RES20F10](#)
[DVS240](#) [XEB01010](#) [DRF08](#) [RES5-F15](#) [RIP0642H2](#) [DRF06](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#)
[XE01010](#) [SMV20](#) [SF1123](#) [CMV30](#) [RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#)
[RE1201](#)