



MECHANICAL SPECIFICATION

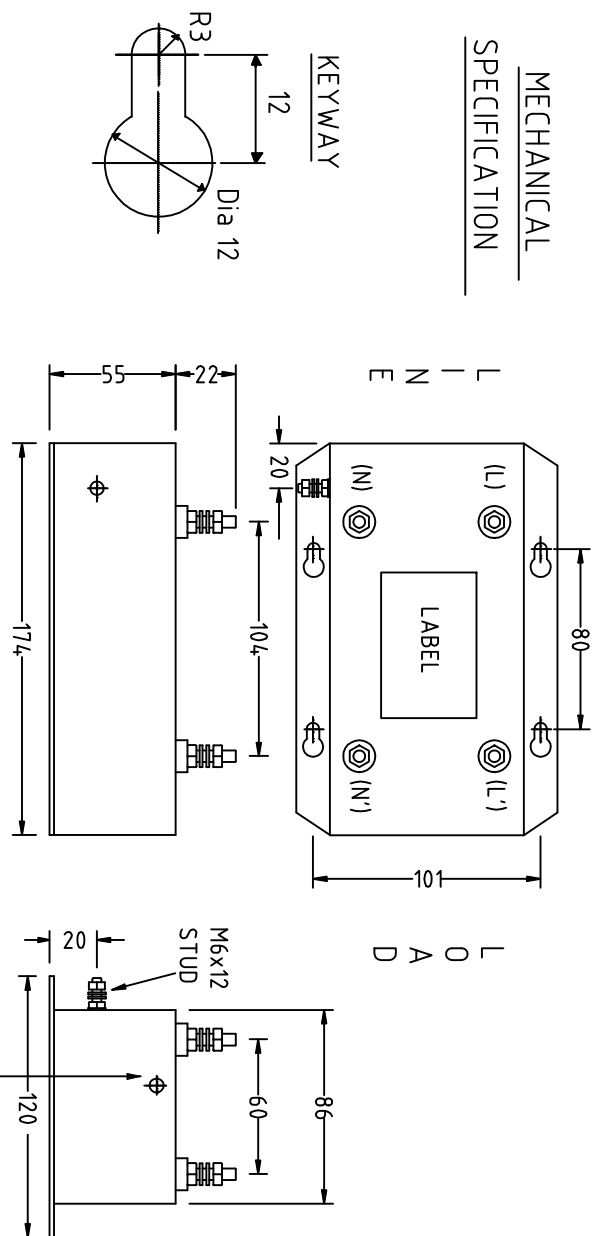

ELECTRICAL SPECIFICATION

RATED VOLTAGE 250V
 LINE FREQUENCY 50/60Hz
 TEMPERATURE RANGE -25 to 85 Degc
 TEST VOLTAGE 2.0KV DC
 LEAKAGE CURRENT 200mA AT 250V 50Hz
 WEIGHT 1.75Kg


ELECTRICAL SCHEMATIC

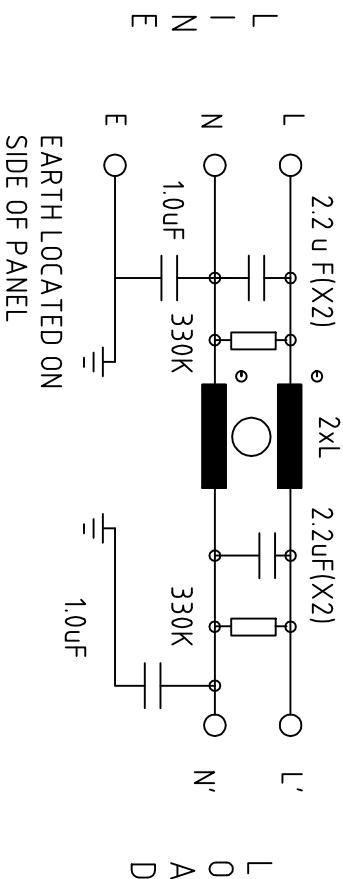

TYPE	CURRENT (IRMS) @4.0 ℃	INDUCTANCE (L)	RESISTANCE (R) PER WINDING	STUD SIZE	MINIMUM INSERTION LOSS AT 150 KHZ	
					COMMON MODE	DIFFERENTIAL MODE
MDF18	18A	6.40 mH	15.0 mR	M6	99dB	42dB
MDF25	25A	4.40 mH	8.5 mR	M6	96dB	39dB
MDF36	36A	2.50 mH	3.8 mR	M6	91dB	34dB
MDF50	50A	1.10 mH	2.0 mR	M6	84dB	27dB

PRODUCT RANGE

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES



ROXBURGH ELECTRONICS LTD

TITLE 2-WIRE M6 MOTOR DRIVE FILTER

Drg No MDFXX-M6-GS

REV 2

GENERAL SPECIFICATION FOR MDFXX-M6

CUSTOMER REFERENCE

Sheet 1 of 1 Aprvd Date 09/03/00 Aprvd By BFS Drwn by BFS SCALE NTS CNN --- Location N: \DWG\GS\GS000168

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [roxburgh](#) manufacturer:

Other Similar products are found below :

[RES20F06](#) [RES90F10](#) [KMF3100](#) [RIS0622H2](#) [XE12001](#) [SF1121](#) [RES5-FO8](#) [DRF10](#) [CMV10](#) [DVS24](#) [C225](#) [RES20F16](#) [RES20F10](#)
[DVS240](#) [XEB01010](#) [DRF08](#) [RES5-F15](#) [RIP0642H2](#) [DRF06](#) [C215](#) [RES10F06](#) [RES30F03](#) [XE0475](#) [RID-0342-H](#) [RES5-F10](#) [RIR-0622-H](#)
[XE01010](#) [SMV20](#) [SF1123](#) [CMV30](#) [RIR-0222-H](#) [SF1122](#) [SMV40](#) [RIQ-0442-H2](#) [RX730RC+CLIP](#) [SMV10](#) [3CRH30330](#) [CMV20](#) [XE1201](#)
[RE1201](#)