


Thick Film Chip Resistors

Performance Specification

Temperature Coefficient	0Ω1 ~ 0Ω99 ±800PPM/°C 1Ω ~ 10Ω ±400PPM/°C 10.1Ω ~ 100Ω ±200PPM/°C >100Ω ±100PPM/°C (0201: >100Ω ≤ ±200PPM/°C)
Short Time Overload	±5%: ±(2.0% + 0.1Ω)Max ±1%: ±(1.0% + 0.1Ω)Max
Insulation Resistance	Min. 1,000 Mega Ohm
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Bending	±(1.0% + 0.05Ω)Max
Soldering Heat	±(1.0% + 0.05Ω)Max
Solderability	Min. 95% coverage.
Temperature Cycling	±5% : ±(1.0% + 0.05Ω)Max ±1% : ±(0.5% + 0.05Ω)Max
Humidity (Steady State)	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(0.5% + 0.1Ω)Max
Load Life in Humidity	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(1.0% + 0.1Ω)Max
Load Life	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(1.0% + 0.1Ω)Max

Ordering Procedure: Ex.: 1206, 1/4W-S, +/-5%, 10Ω T/R-5000

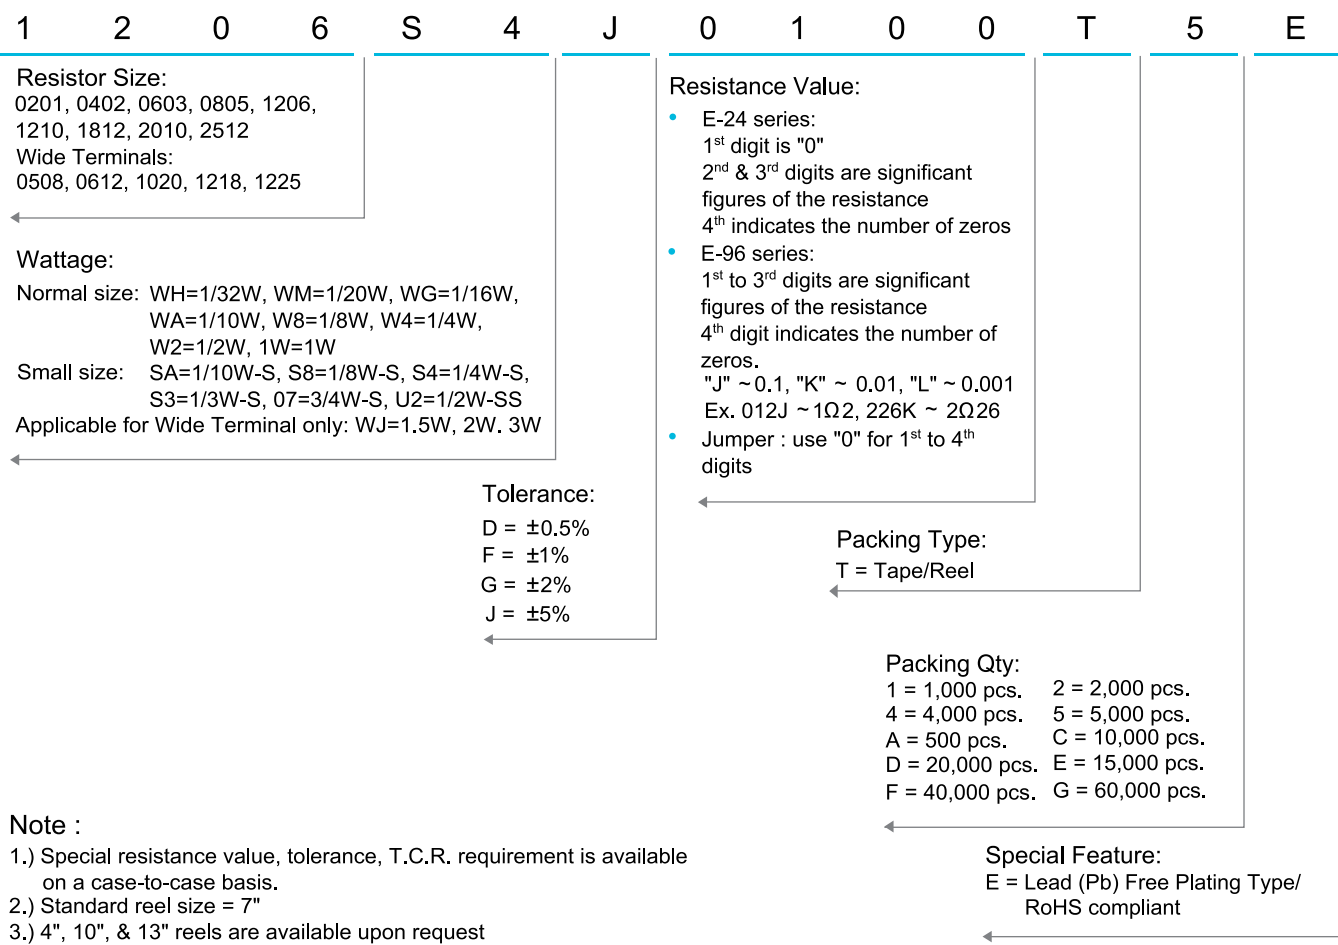



Thick Film Chip Resistors

Features

- Small size and light weight
- Suitable for both wave and reflow soldering
- Reduction of assembly costs



Dimension

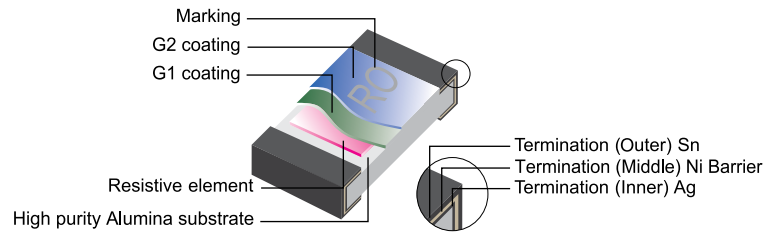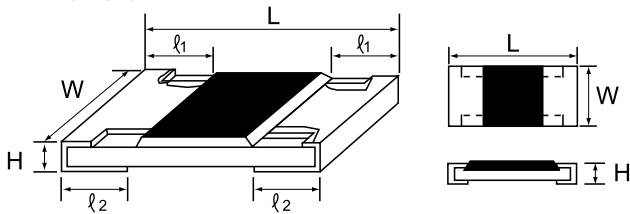


Type	Power Rating at 70°C	Max Working Voltage/Current	Max Overload Voltage/Current	Dielectric Withstanding Voltage	Tolerance %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
0201 (0603)	1/20W	0.5A	1A	-	Jumper	<50mΩ	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05
		25V	50V	-	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0402 (1005)	1/16W	1A	2A	-	Jumper	<50mΩ	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
		50V	100V	100V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0603 (1608)	1/10W-S 1/16W	1A	2A	-	Jumper	<50mΩ	1.60±0.10	0.80 ^{+0.15} _{-0.10}	0.45±0.10	0.30±0.20	0.30±0.20
		75V	150V	300V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0805 (2012)	1/8W-S 1/10W	2A	5A	-	Jumper	<50mΩ	2.00±0.15	1.25 ^{+0.15} _{-0.10}	0.55±0.10	0.40±0.20	0.40±0.20
		150V	300V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1206 (3216)	1/4W-S 1/8W	2A	10A	-	Jumper	<50mΩ	3.10±0.15	1.55 ^{+0.15} _{-0.10}	0.55±0.10	0.45±0.20	0.45±0.20
		200V	400V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1210 (3225)	1/2W-SS 1/3W-S 1/4W	2A	10A	-	Jumper	<50mΩ	3.10±0.10	2.60±0.15	0.55±0.10	0.50±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1812	1/2W 3/4W-S	2A	10A	-	Jumper	<50mΩ	4.50±0.20	3.20±0.20	0.55±0.20	0.50±0.20	0.50±0.20
		200V	500V	500V	±1% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ					
2010 (5025)	3/4W-S 1/2W	2A	10A	-	Jumper	<50mΩ	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
2512 (6432)	1W	2A	10A	-	Jumper	<50mΩ	6.35±0.10	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					

Note:

- 1.) Metric information inside parenthesis.
- 2.) Standard Operating Temp (°C): -55 ~ +155
- 3.) Standard: E-96 series: 0.5%, 1%
E-24 series: 2%, 5%
- 4.) Low resistance range (0.1Ω ~ 0.99Ω) is also available for 0402, 0603, 0805, 1206, 1210, 2010 and 2512

Derating Curve

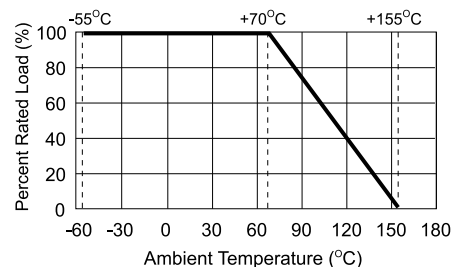

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category](#):

Click to view products by [Royal Ohm manufacturer](#):

Other Similar products are found below :

[CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#) [RC1005F471CS](#) [RC1005F4751CS](#)
[RCP0603W100RGED](#) [RCWP72251K47FKWB](#) [RGC1/16C3301FT](#) [RLR05C7501GPB14](#) [RLR07C5111FSBSL](#) [ERJ-1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#) [25121WF1003T4E](#) [25121WF100JT4E](#) [25121WF220JT4E](#) [25121WF470KT4E](#)
[25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-4.7K-RC](#) [304-1.0M-RC](#) [SR06X1001FTL](#) [25121WF100KT4E](#) [25121WF4700T4E](#) [302-1.0M-RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#) [CRCW06031K30FKEC](#) [CRCW060320K5FKEE](#)
[CRG0201F10K](#) [RCG0402150RFKED](#) [RCG04023K92FKED](#) [RCP2512B100RGWB](#) [RCWP110010R0FKS3](#) [RCWP11002K00FKS3](#)
[RCWP110051R1FKS3](#) [RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [M55342K11B9E53RUL](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-075K1L](#) [MM02041001FRC](#) [MMB0207-50-10R0FTR-L](#) [5-2176094-4](#)