


Thick Film Chip Resistors

Performance Specification

Temperature Coefficient	0Ω1 ~ 0Ω99 ±800PPM/°C 1Ω ~ 10Ω ±400PPM/°C 10.1Ω ~ 100Ω ±200PPM/°C >100Ω ±100PPM/°C (0201: >100Ω ≤ ±200PPM/°C)
Short Time Overload	±5%: ±(2.0% + 0.1Ω)Max ±1%: ±(1.0% + 0.1Ω)Max
Insulation Resistance	Min. 1,000 Mega Ohm
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Bending	±(1.0% + 0.05Ω)Max
Soldering Heat	±(1.0% + 0.05Ω)Max
Solderability	Min. 95% coverage.
Temperature Cycling	±5% : ±(1.0% + 0.05Ω)Max ±1% : ±(0.5% + 0.05Ω)Max
Humidity (Steady State)	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(0.5% + 0.1Ω)Max
Load Life in Humidity	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(1.0% + 0.1Ω)Max
Load Life	±5% : ±(3.0% + 0.1Ω)Max ±1% : ±(1.0% + 0.1Ω)Max

Ordering Procedure: Ex.: 1206, 1/4W-S, +/-5%, 10Ω T/R-5000

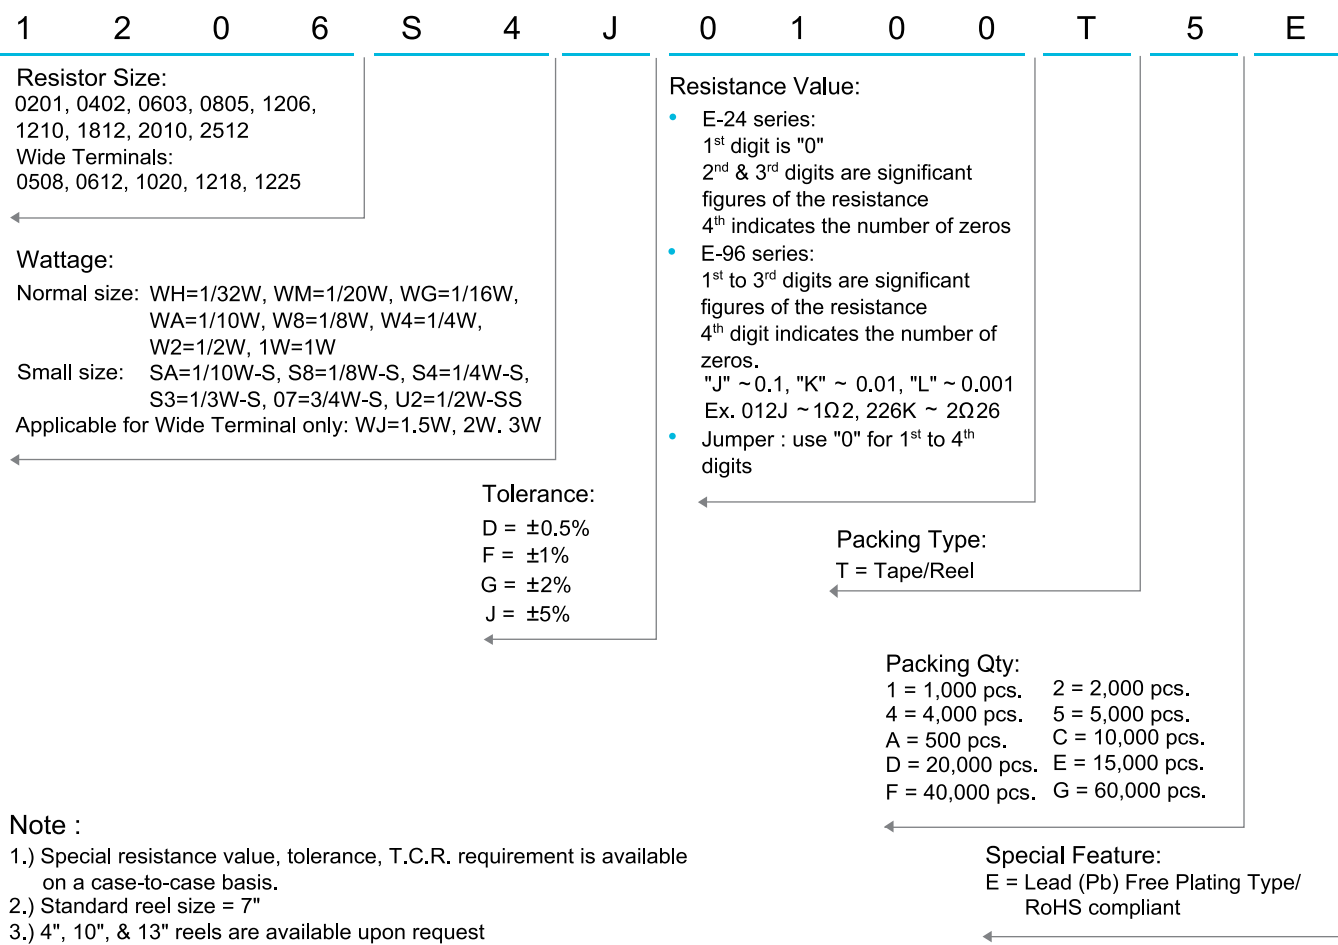


Thick Film Chip Resistors



Features

- Small size and light weight
- Suitable for both wave and reflow soldering
- Reduction of assembly costs

Dimension

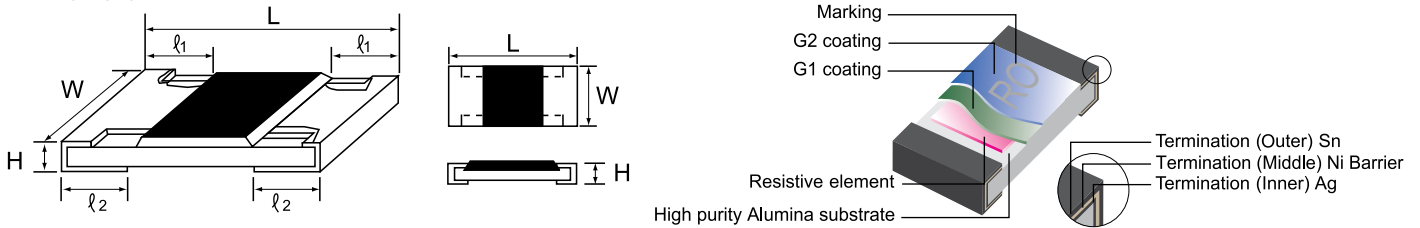


Type	Power Rating at 70°C	Max Working Voltage/Current	Max Overload Voltage/Current	Dielectric Withstanding Voltage	Tolerance %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
0201 (0603)	1/20W	0.5A	1A	-	Jumper	<50mΩ	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05
		25V	50V	-	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0402 (1005)	1/16W	1A	2A	-	Jumper	<50mΩ	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
		50V	100V	100V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0603 (1608)	1/10W-S 1/16W	1A	2A	-	Jumper	<50mΩ	1.60±0.10	0.80 ^{+0.15} _{-0.10}	0.45±0.10	0.30±0.20	0.30±0.20
		75V	150V	300V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
0805 (2012)	1/8W-S 1/10W	2A	5A	-	Jumper	<50mΩ	2.00±0.15	1.25 ^{+0.15} _{-0.10}	0.55±0.10	0.40±0.20	0.40±0.20
		150V	300V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1206 (3216)	1/4W-S 1/8W	2A	10A	-	Jumper	<50mΩ	3.10±0.15	1.55 ^{+0.15} _{-0.10}	0.55±0.10	0.45±0.20	0.45±0.20
		200V	400V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1210 (3225)	1/2W-SS 1/3W-S 1/4W	2A	10A	-	Jumper	<50mΩ	3.10±0.10	2.60±0.15	0.55±0.10	0.50±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
1812	1/2W 3/4W-S	2A	10A	-	Jumper	<50mΩ	4.50±0.20	3.20±0.20	0.55±0.20	0.50±0.20	0.50±0.20
		200V	500V	500V	±1% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ					
2010 (5025)	3/4W-S 1/2W	2A	10A	-	Jumper	<50mΩ	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					
2512 (6432)	1W	2A	10A	-	Jumper	<50mΩ	6.35±0.10	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20
		200V	500V	500V	±1% ±2% ±5%	1Ω ~ 10MΩ 1Ω ~ 10MΩ 1Ω ~ 10MΩ					

Note:

- 1.) Metric information inside parenthesis.
- 2.) Standard Operating Temp (°C): -55 ~ +155
- 3.) Standard: E-96 series: 0.5%, 1%
E-24 series: 2%, 5%
- 4.) Low resistance range (0.1Ω ~ 0.99Ω) is also available for 0402, 0603, 0805, 1206, 1210, 2010 and 2512

Derating Curve

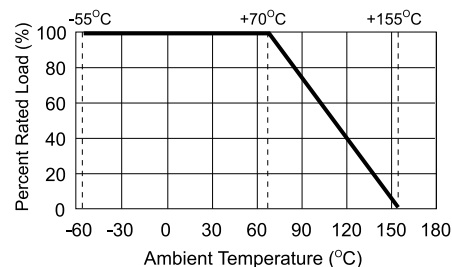

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category](#):

Click to view products by [Royal Ohm manufacturer](#):

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [CR-12JP4--680R](#) [CRCW04021K20FKEE](#) [CRCW04028R20JNEE](#) [CRCW06032K10FKEC](#)
[CRCW06036K80FKEE](#) [M55342K03B499DRS6](#) [M55342K06B6E19RWL](#) [M55342K09B5D62RS6](#) [M55342M06B26E7RS3](#) [742C083750JTR](#)
[MCR01MRTF1001](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ121](#)
[MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZPJ103](#) [MCR03EZPF2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#)
[MCR18EZPJ330](#) [RC1005F1152CS](#) [RC1005F1372CS](#) [RC1005F2052CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#)
[RC1005F6041CS](#) [RC1005J121CS](#) [RC1005J122CS](#) [RC1005J180CS](#) [RC1005J181CS](#) [RC1005J202CS](#) [RC1005J391CS](#) [RC1005J512CS](#)
[RC1005J683CS](#) [RC1005J823CS](#) [RC1608F333CS](#) [RC1608F5110CS](#) [RC1608J121CS](#) [RC2012F2493CS](#) [RC2012F2740CS](#) [RC2012J105CS](#)
[RC2012J470CS](#)