


High Power Thick Film Chip Resistors

Performance Specification

Temperature Coefficient	HP02 :	1Ω ~ 10Ω	± 400PPM/°C
		10.1Ω ~100 Ω	± 200PPM/°C
		>100Ω	± 100PPM/°C
	HP03~ HP12, SP12 :	1Ω ~ 10Ω	≤± 200PPM/°C
		10.1Ω ~ 10MΩ	≤±100PPM/°C
Short Time Overload	±5%:	±(2.0% + 0.1Ω)Max	
	±1%:	±(1.0% + 0.1Ω)Max	
Terminal Bending	±(1.0% + 0.05Ω)Max		
Soldering Heat	±(1.0% + 0.05Ω)Max		
Solderability	Min. 95% coverage.		
Humidity (Steady State)	±5%:	±(3.0% + 0.1Ω)Max	
	±1%:	±(0.5% + 0.1Ω)Max	
Load Life in Humidity	±5%:	±(3.0% + 0.1Ω)Max	
	±1%:	±(1.0% + 0.1Ω)Max	
Load Life	±5%:	±(3.0% + 0.1Ω)Max	
	±1%:	±(1.0% + 0.1Ω)Max	
Temperature Cycling	±5%:	±(1.0% + 0.05Ω)Max	
	±1%:	±(0.5% + 0.05Ω)Max	
Insulation Resistance	Min. 1,000 Mega Ohm		
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.		

Ordering Procedure: Ex.: HP05, 1/3W, +/-5%, 1Ω T/R-5000

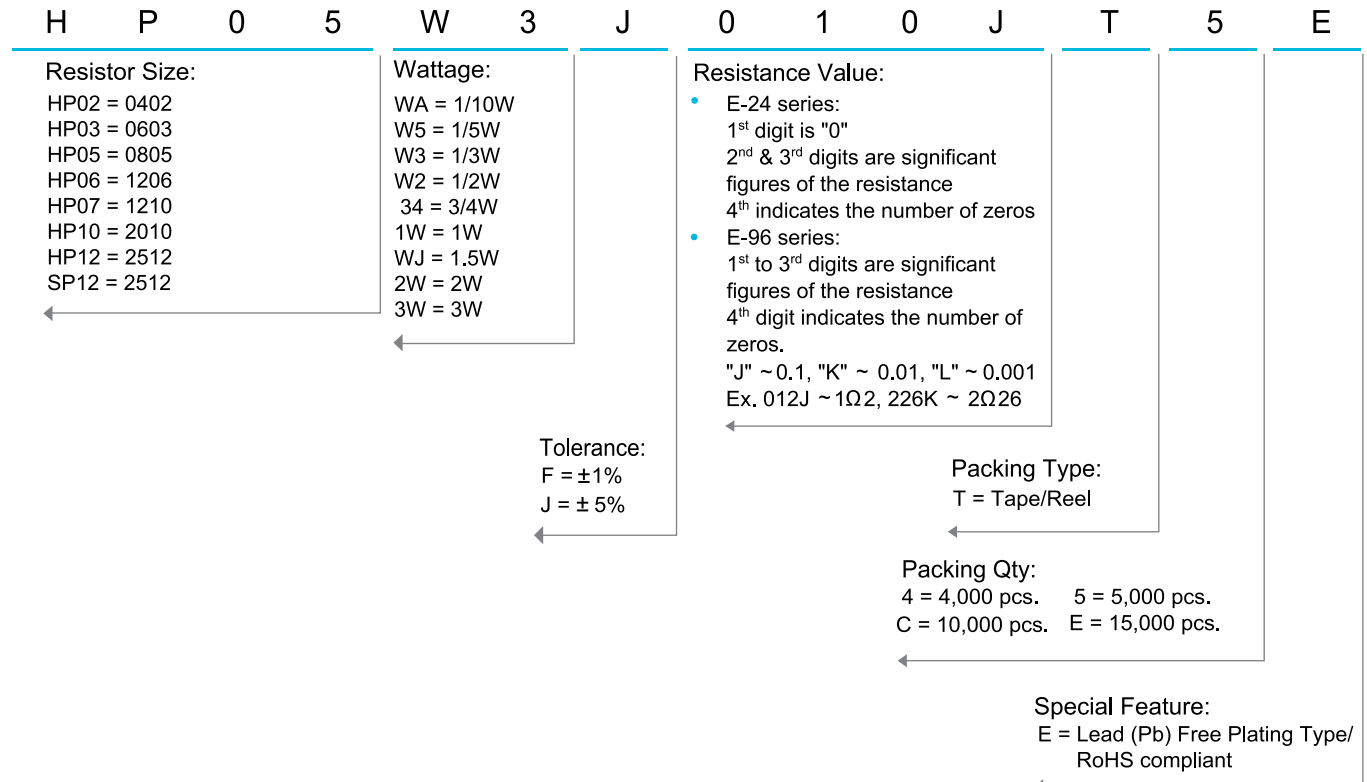


High Power Thick Film Chip Resistors

Features

- High power in standard size
- Suitable for both wave and reflow soldering
- Application: AV adapters, LCD back light, Camera strobe

Dimension

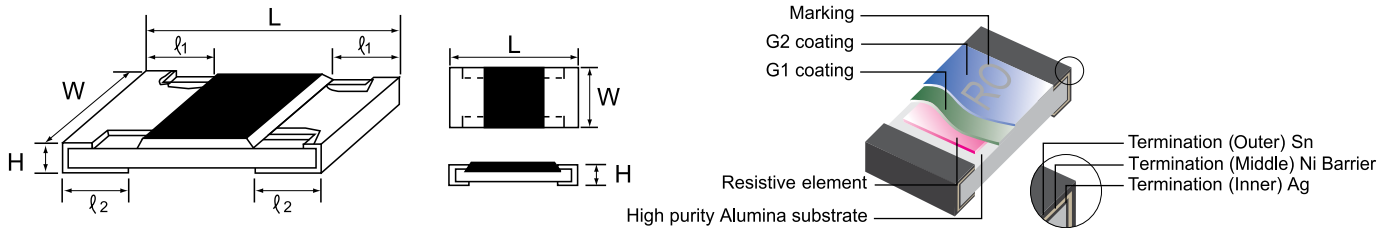

Type	Power Rating at 70°C	Max Working Voltage	Max Overload Voltage	Dielectric Withstanding Voltage	Tol %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
HP02 (0402)	1/10W	50V	100V	100V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
HP03 (0603)	1/5W	50V	100V	300V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	1.60±0.10	0.80 ^{+0.15} -0.10	0.45±0.10	0.30±0.20	0.30±0.20
HP05 (0805)	1/3W	150V	300V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	2.00±0.15	1.25 ^{+0.15} -0.10	0.55±0.10	0.40±0.20	0.40±0.20
HP06 (1206)	1/2W	200V	400V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	3.10±0.15	1.55 ^{+0.15} -0.10	0.55±0.10	0.45±0.20	0.45±0.20
HP07 (1210)	3/4W	200V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	3.10±0.10	2.60 ^{+0.15} -0.10	0.55±0.10	0.50±0.20	0.50±0.20
HP10 (2010)	1W	200V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20
HP12 (2512)	2W	250V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	6.35±0.10	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20

Note:


- 1.) Standard Operating Temp (°C): -55 ~+155 2.) Standard : E-96 series : 1% & E-24 series : 5%
- 2.) HP12 1Ω ~ 10MΩ Low TCR available case by case on basis.
- 3.) HP low resistance range : 0.1Ω ~ 1Ω available,
TCR for HP03, HP05 at +/-200ppm°C, HP06 ~ HP12 at +/-100ppm°C,
Electrical performance same as above.

Extra High Power Thick Film Chip Resistors


Features

- High power in standard size
- Suitable for both wave and reflow soldering
- Application: AV adapters, LCD back light, Camera strobe

Dimension

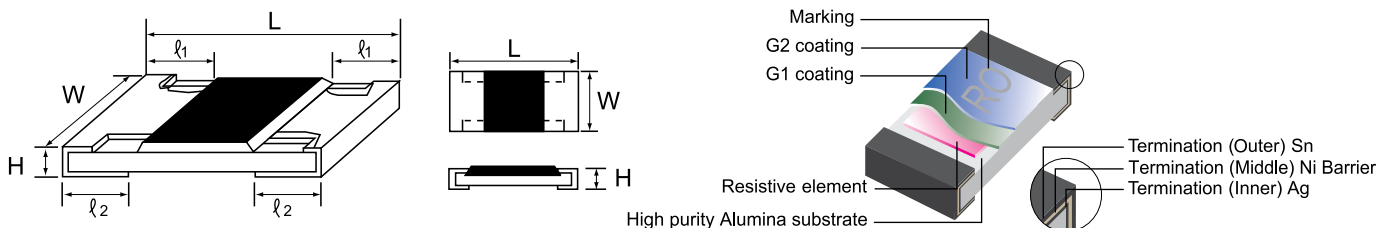

Recommended solder pad



Size	A Width (mm)	B Pad (mm)	C Spacing (mm)
HP12 SP12	3.70	2.80	2.70

4 layers PCB specification:

- 1) Outside 2 layers (Top and Bottom) with copper foil thickness at 2oz.
- 2) Inside 2 layers (Middle layers) with copper foil thickness at 4 oz.

Type	Power Rating at 70°C	Max Working Voltage	Max Overload Voltage	Dielectric Withstanding Voltage	Tol %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
SP12 (2512)	3W	250V	500V	500V	±1% ±5%	1Ω~10MΩ 1Ω~10MΩ	6.35±0.10	3.20±0.15	1.10±0.10	0.60±0.25	1.80±0.20



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [royal ohm manufacturer](#):

Other Similar products are found below :

[0402WVGJ0393TCE](#) [0402WVGJ0912TCE](#) [0402WVGJ0432TCE](#) [0402WVGJ0163TCE](#) [0402WVGJ0205TCE](#) [0402WVGJ0622TCE](#) [0402WVGJ0204TCE](#)
[PRM05WJP102B00](#) [PRM05WJP221B00](#) [PRM05WJW10KB00](#) [PRM05WJW220B00](#) [PRM05WJW22JB00](#) [PRW05WJP473B00](#)
[PRW05WJP750B00](#) [PRW0AWJW56JB00](#) [KNP03SJ0111A10](#) [PRM05WJP223B00](#) [PRM05WJW100B00](#) [PRM05WJW330B00](#)
[PRW020JW120B00](#) [PRW05WJP181B00](#) [PRW05WJP562B00](#) [PRW05WJP680B00](#) [PRW0AWJP682B00](#) [MOR02SJ075JA10](#)
[MOR03WG9092A](#) [PRW0AWJW51JB00](#) [PRWAAWJW22KB00](#) [PRWAAWJW33KB00](#) [PRWAAWJW100B00](#) [PRWAAWJP152B00](#)
[PRWAAWJW10JB00](#) [PRWAAWJW221B00](#) [PRWAAWJW270B00](#) [PRWAAWJW27JB00](#) [PRWAAWJW330B00](#) [PRWAAWJW51JB00](#)
[PRWAAWJW681B00](#) [PRW0FWJW82JB00](#) [QL0000J0101200](#) [PRWAAWJW680B00](#) [QL0000J010J200](#) [QL0050J0362000](#) [QL0050J0470000](#)
[0805WAFE024KIT](#) [HP02WAFE024KIT](#) [QL0000J0220100](#) [QL0000J0220200](#) [KNP03SJ091JA10](#) [QL0000J047J100](#)