

Metal Oxide Film Fixed Resistors

Performance Specification

Temperature Coefficient	±350PPM/°C
Short Time Overload	Normal size: ±(1.0% + 0.05Ω)Max, with no evidence of mechanical damage. Small size: ±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Pulse Overload	Normal size: ±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage. Small size: ±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Terminal Strength	No evidence of mechanical damage.
Resistance to Soldering Heat	±(1.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Solderability	Min. 95% coverage.
Resistance to Solvent	No deterioration of protective coating and markings.
Temperature Cycling	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Humidity (Steady state)	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life in Humidity	<100KΩ: ±(5.0% + 0.05Ω)Max ≥100KΩ: ±(10.0% + 0.05Ω)Max
Load Life	<100KΩ: ±(5.0% + 0.05Ω)Max ≥100KΩ: ±(10.0% + 0.05Ω)Max
Non-Flame	No evidence of flaming or arcing.

Ordering Procedure: Ex.: MOR 1/2W, +/-5%, 100Ω, T/B-1000

M	O	R	0	W	2	J	0	1	0	1	A	1	0				
<p>Type: MOR = Metal Oxide Film</p>			<p>Wattage:</p> <p>Normal size</p> <p>W4 = 1/4W</p> <p>W2 = 1/2W</p> <p>1W = 1W</p> <p>2W = 2W</p> <p>3W = 3W</p> <p>5W = 5W</p> <p>7W = 7W</p> <p>8W = 8W</p> <p>9W = 9W</p> <p>Small size</p> <p>S2 = 1/2W-S</p> <p>1S = 1W-S</p> <p>2S = 2W-S</p> <p>3S = 3W-S</p> <p>4S = 4W-S</p> <p>5S = 5W-S</p> <p>Extra small size</p> <p>5U = 5W-SS</p>			<p>Resistance Value:</p> <ul style="list-style-type: none"> E-24 series: <ul style="list-style-type: none"> 1st digit is "0" 2nd & 3rd digits are the significant figures of the resistance 4th indicates the number of zeros: "J" ~ 0.1, "K" ~ 0.01 E-96 series: <ul style="list-style-type: none"> 1st to 3rd digits are the significant figures of the resistance and the 4th digit indicates the number of zeros. <p>Ex.: 4.7Ω, ~ 47J, 4.7KΩ ~ 472</p> <p>Ex.: 1.33 KΩ = 1331</p>			<p>Packing Type:</p> <p>A = Tape/Box</p> <p>T = Tape/Reel</p> <p>B = Bulk/Box</p> <p>P = Tape/Box of PT-26mm</p>			<p>Packing Qty:</p> <p>1 = 1,000 pcs. 2 = 2,000 pcs.</p> <p>5 = 5,000 pcs. A = 500 pcs.</p> <p>B = 2,500 pcs. 0 = Bulk/Box</p>			<p>Additional Information:</p> <p>0 = PT-52mm, PT-26mm</p> <p>8 = PT-58mm</p> <p>9 = PT-64mm</p> <p>7 = Lead wire (H=38mm)</p> <p>A = PT-83mm</p> <p>C = PT-73mm</p> <p>D = PT-71mm</p>		
<p>Feature:</p> <p>0 = Standard</p> <p>I = Non-Inductive</p>			<p>Tolerance:</p> <p>G = ±2%</p> <p>J = ±5%</p> <p>K = ±10%</p>														




Metal Oxide Film Fixed Resistors

Features

- High safety standard, high purity ceramic core
- Excellent non-flame coating, non-inductive type available
- Stable performance in diverse environment, meet EIAJ-RC2655A requirements
- Too low or too high ohmic value can be supplied on a case to case basis



Standard: 2%, 5% 10%---E 24 series
1%---E 96 series

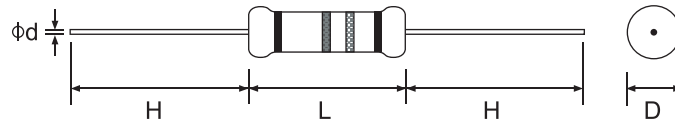


Part No.	Style	Power Rating at 70°C	Dimension (mm)					Max Working Voltage	Max Overload Voltage	Dielectric Withstanding Voltage	Resistance Range	Std Packing Qty
			D Max	L Max	H±3	d±0.05	PT					
Normal Size												
MOR0W4	MOR 25	1/4W(0.25W)	2.5	7.5	28	0.54	52	250V	400V	250V	0.3Ω ~ 50KΩ	5,000
MOR0W2	MOR 50	1/2W(0.50W)	3.5	10.0	28	0.54	52	250V	400V	250V	0.3Ω ~ 50KΩ	1,000
MOR01W	MOR 100	1W	5.0	12.0	25	0.70	52	350V	600V	350V	0.3Ω ~ 50KΩ	1,000
MOR02W	MOR 200	2W	5.5	16.0	28	0.70	64	350V	600V	350V	0.3Ω ~ 50KΩ	1,000
MOR03W	MOR 300	3W	6.5	17.5	28	0.75	64	500V	800V	500V	5Ω ~ 100KΩ	500
MOR05W	MOR 500	5W	8.5	26.0	38	0.75	B/B	750V	1,000V	750V	5Ω ~ 150KΩ	1,000
MOR07W	MOR 700	7W	8.5	32.0	38	0.75	B/B	750V	1,000V	750V	20Ω ~ 150KΩ	1,600
MOR08W	MOR 800	8W	8.5	41.0	38	0.75	B/B	750V	1,000V	750V	30Ω ~ 200KΩ	1,600
MOR09W	MOR 900	9W	8.5	54.0	38	0.75	B/B	750V	1,000V	750V	50Ω ~ 200KΩ	1,800
Small Size												
MOR0S2	MOR 50-S	1/2W(0.50W)	2.5	7.5	28	0.54	52	250V	400V	250V	0.3Ω ~ 50KΩ	5,000
MOR01S	MOR 100-S	1W	3.5	10.0	28	0.54	52	350V	600V	350V	0.3Ω ~ 50KΩ	1,000
MOR02S	MOR 200-S	2W	5.0	12.0	25	0.70	52	350V	600V	350V	0.3Ω ~ 50KΩ	1,000
MOR03S	MOR 300-S	3W	5.5	16.0	28	0.70	64	350V	600V	350V	0.3Ω ~ 50KΩ	1,000
MOR04S	MOR 400-S	4W	6.5	17.5	28	0.75	64	500V	800V	500V	5Ω ~ 100KΩ	500
MOR05S	MOR 500-S	5W	8.0	25.0	38	0.75	B/B	500V	800V	500V	5Ω ~ 150KΩ	1,000
Extra Small Size												
MOR05U	MOR 500-SS	5W	6.5	17.5	28	0.75	64	500V	800V	500V	5Ω ~ 100KΩ	500


Note:

- Standard gray base color for normal size product, sea blue color for small size and extra small size product
- Standard Non-flammable coating
- Non-Inductive type available on a case to case basis

Derating Curve

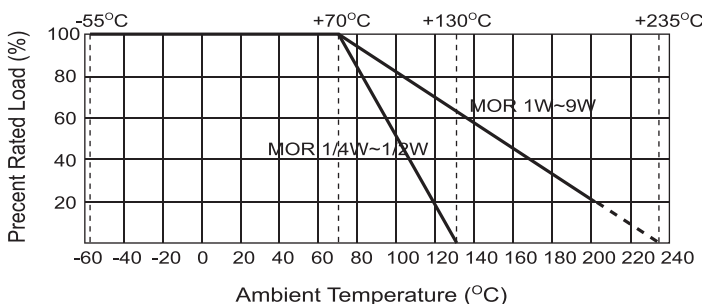

Heat Rise Chart

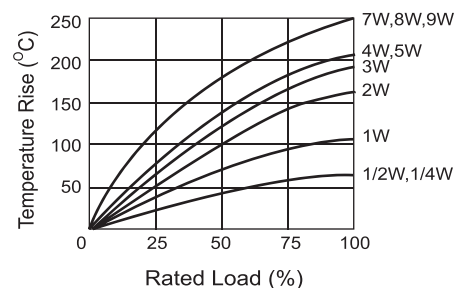

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - Through Hole category](#):

Click to view products by [Royal Ohm manufacturer](#):

Other Similar products are found below :

[G05C7R000HB1223](#) [G22041431007J2C000](#) [PW10-39R-5%](#) [C142K2JL](#) [CA00021R000JE14](#) [RWR81S1000BRB12](#) [RWR81SR427DRB12](#)
[RWR81SR619FRBSL](#) [RWR89S9310FPB12](#) [93J62RE](#) [AC04000002209JAC00](#) [25J39K](#) [CP0005330R0JE3191](#) [CPCC03R5000JB31](#)
[CPCC0510R00JE32](#) [CPCC051R000JB31](#) [CPCP10500R0JE32](#) [CPW152K500JE313](#) [CA000210R00JE14](#) [RS02B887R0FE73](#)
[RWR89S6190FSB12](#) [RWR89SR237FRB12](#) [CPCC03R2000JB31](#) [CPW055R000JB143](#) [CPW103K300JE143](#) [CPW202R000JB14](#) [ULW5-](#)
[39R0JT075](#) [W31-R47JA1](#) [VP25K-120](#) [VC3D900](#) [65888-3R3](#) [RWR89S4121FRS73](#) [RWR80S10R0FSB12](#) [CB5JB10R0](#)
[RWR81S1000FRB12](#) [CP000533R00JE66](#) [RWR84N5360FPB12](#) [VC3D.5](#) [SQM500JB-200R](#) [RWR81N49R9FSS70](#) [75822-10R](#) [WHS201-](#)
[68RJA25](#) [W31-1K2JA1](#) [RWR81S20R0FRS73](#) [25W110-BULK](#) [25W156](#) [25W239](#) [25W3D3-BULK](#) [65888-300](#) [135-R47-JBW](#)