

RRC-SCC1130

Standard battery charger

P/N: 110002

110121 (MP Version with Multi Wall-Mount Plugs for EU, US, AU and UK)

110038 (US Version for US, CA, MX, JP)


110057 (EU Version for EU, RU)

110069 (UK Version)

110070 (AU Version for AU, NZ)

110071 (KC Version for KR)

110072 (CC Version for CN)

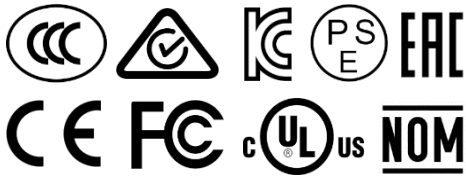

Features:

- 5.00W single bay charger
- For the standard battery RRC1130
- Optimized charging process enables longer cycle life for RRC battery
- Simple operation – Plug and Play
- External power supply for worldwide use

Applications:

Standard charging station for mobile devices used in medical, industrial and consumer markets

Specification

Input	
Voltage	5.00V nom.
Current	1.00A nom.
Power	5.00W

Output	
Voltage range	4.35VDC
Current range	1.00A max.
Voltage tolerance	±1% max.
Current tolerance	±10% max. @1.00A
Protection	Short circuit, battery over/under temperature, charge over temperature, charge timer

Environmental		
Cooling	convection cooled	
Temperature	Operation: 0°C to 40°C	Storage: -10°C to 70°C
Pressure & Altitude	Operation: 1060hPa to 795hPa -382m to 2000m	Storage 1060hPa to 572hPa -382m to 4570m
Humidity	10% to 90% r.H., non-condensing	

General	
Indicator	Multi-color LED (green, red, orange)
Battery types	Standard battery RRC1130
Green procurement	RoHS 2011/65/EU, 2015/863/EU WEEE 2012/19/EU Chinese RoHS

LED Indications	
Orange light	The inserted battery is of the correct type and is currently being charged.
Green light	The battery is charged and can be removed for use.
Red blinking	Battery detection phase
Red light	No battery inserted Battery over/under temperature error Charger over temperature error Battery over voltage error Battery charge time-out error Input voltage too low

Charger Mechanical Details	
Housing dimensions (LxWxH)	66.80 x 106.61 x 8.48mm
Weight	25.00g (excluding power supply)

Safety & EMC	In combination with included external AC/DC power supply	
Regulatory approvals	Europe	EN 60950-1 (CE)
	International	IEC 60950-1 (CB)
Electromagnetic Emissions	Europe	EN55011, EN55032, class B
	USA	FCC15 class B
Electromagnetic Immunity	Electrostatic discharge	EN/IEC61000-4-2
	RF electromagnetic fields	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted FR disturbance	EN/IEC61000-4-6
	Electromagnetic Fields	EN/IEC61000-4-8
	Voltage Dips and Interrupts	EN/IEC61000-4-11

Specification for external AC/DC power supply

Input		
Voltage	100.00 – 240.00VAC ±10%, 50-60Hz	
Current	0.30A max.	
Stand by power	No load < 0.10W	
Output		
Voltage	5.00VDC ±5%	
Power	5.00W cont.	
Current	1.00A max.	
Protection	Over current, short circuit	
Environmental		
Temperature	Operation: 0°C to 40°C	Storage: -20°C to 80°C
Humidity	10% to 90% r.H., non-condensing	5% to 95% r.H., non-condensing
Altitude	< 2000m	< 2000m
General		
Efficiency	California's Energy Efficiency Level VI	
Line / Load regulation	±1% / ± 5%	
Ripple & Noise	200.00mV (p-p)	
Power Supply Mechanical Details		
Standard output connector	Micro USB	
Housing dimensions (LxWxH)	43.55 x 40.90 x 45.30mm for US/CA/MX/JP 43.55 x 40.90 x 60.20mm for EU/RU 43.55 x 40.90 x 37.40mm for UK 43.55 x 40.90 x 60.20mm for KR 43.55 x 40.90 x 49.00mm for AU 43.55 x 40.90 x 45.50mm for CN 54.8 x 29.5 x 44.9mm for Multi Wall-Mount Plug Version (EU, USA, AUS and UK)	
Weight	70g max.	
Cable length	1.00m	
Regulatory Approvals		
Approvals	Europe International USA & Canada Mexico Australia & New Zealand Korea China Japan Russia (Customs Union)	CE CB cULus / cETLus NOM RCM / SAA KC CCC PSE EAC

Germany/Headquarters

RRC power solutions GmbH
Technologiepark 1
66424 Homburg / Saar

Tel.: +49 6841 98090
Fax: +49 6841 9809280
Email: sales@rrc-ps.de
Web: www.rrc-ps.de

USA

RRC power solutions Inc.
18340 Yorba Linda Blvd.,
107-437 Yorba Linda,
CA 92886-4104

Tel.: +1 714 777 3604
Fax: +1 714 777 3658
Email: usa@rrc-ps.com
Web: www.rrc-ps.com

Hong Kong

RRC power solutions Ltd.
S-V,6/F, Valiant Industrial
Centre 2-12 Au Pui Wan Street
Fo Tan, N.T., Hong Kong

Tel.: +852 2376 0106
Fax: +852 2375 0107
Email: hkrrc@rrc-ps.cn
Web: www.rrc-ps.com

China

RRC power solutions Ltd.
Room 1306, C Building,
Tianan International building,
Renmin South Road, Luohu
District, Shenzhen 518021

Tel.: +86 755 8374 1908
Fax: +86 755 8374 1861
Email: hkrrc@rrc-ps.cn
Web: www.rrc-ps.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Chargers](#) category:

Click to view products by [RRC Power Solutions](#) manufacturer:

Other Similar products are found below :

[CH0011](#) [CB1210A](#) [PS-034052](#) [GP X411 AA/AAA + 4X R6 2700MAH RECYKO](#) [CB123A](#) [CB12245A](#) [DA60U-240A-R](#) [DA200U-250A-R](#)
[MC2](#) [MC1](#) [BQ-CC55E](#) [VP4 PLUS DRAGON](#) [LCD MULTI CHARGER](#) [MINI-CHARGER](#) [5V 2.1A](#) [PB320](#) [PB50](#) [PB550 + 4XAA](#)
[2700MAH](#) [VC4](#) [POCKET-CHARGER + 4XAA 2100MAH](#) [PB-300P-12](#) [VC2](#) [MINI CHARGER + 2XAA 2100MAH](#) [CHFC3](#) [GC30U-5P1J](#)
[TSP-BCM48](#) [SBP-001](#) [PB-300N-12](#) [GC30B-11P1J](#) [GC220A12-AD1](#) [PSC-122000A-C](#) [TSP-BCM12](#) [TSP-BCMU360](#) [TSP-BCM48A](#) [H-](#)
[TRONIC AL 2000PLUS](#) [H-TRONIC HTDC 5000](#) [ES360A](#) [LS-CR45-PQ](#) [LS-CR45-PD WHITE](#) [5V 1A](#) [PB2 BLUE](#) [SC1](#) [SC2](#) [VC2S](#) [X2](#)
[X4](#) [CEF14 2XAA 2XAAA](#) [CEF27 2XAA 2XAAA](#) [CL14.4VDC-0.4A](#) [CL14.4VDC-0.7A](#)