

PX SERIES

105°C Standard

\*Load Life : 105°C 1000~2000 hours.

RoHS  
compliance



◆SPECIFICATIONS

Items	Characteristics		
Category Temperature Range	-55~+105°C	-40~+105°C	-25~+105°C
Rated Voltage Range	6.3~100Vdc	160~400Vdc	450Vdc
Capacitance Tolerance	±20%(20°C, 120Hz)		
Leakage Current(MAX)	6.3~100Vdc	160~450Vdc	
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)	CV≤1000	CV>1000
		I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes)	I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)
	I=Leakage Current(µA)	C=Capacitance(µF)	V=Rated Voltage(Vdc)
Dissipation Factor(MAX) (tanδ)	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450	(20°C, 120Hz)
	tanδ	0.28 0.24 0.20 0.16 0.14 0.12 0.10 0.08 0.20 0.20 0.20 0.25 0.25 0.25	
	When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.		
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements.		
	Capacitance Change	Within ±25% of the initial value.	Case Size
	Dissipation Factor	Not more than 200% of the specified value.	Life Time (hrs)
	Leakage Current	Not more than the specified value.	φD≤8 1000 φD≥10 2000
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450	(120Hz)
	Z(-25°C)/Z(20°C)	5 4 3 2 2 2 2 2 3 3 4 6 6 7	
	Z(-40°C)/Z(20°C)	10 8 6 4 3 3 3 3 4 4 8 8 10 -	

◆MULTIPLIER FOR RIPPLE CURRENT


Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient	0.47~1µF	0.50	1.00	1.20	1.30 1.50
	2.2~4.7µF	0.65	1.00	1.20	1.30 1.50
	10~47µF	0.80	1.00	1.20	1.30 1.50
	100~1000µF	0.80	1.00	1.10	1.15 1.20
	2200~33000µF	0.80	1.00	1.05	1.10 1.15

◆OPTION

	Code
PET Sleeve	EFC

◆DIMENSIONS

(mm)

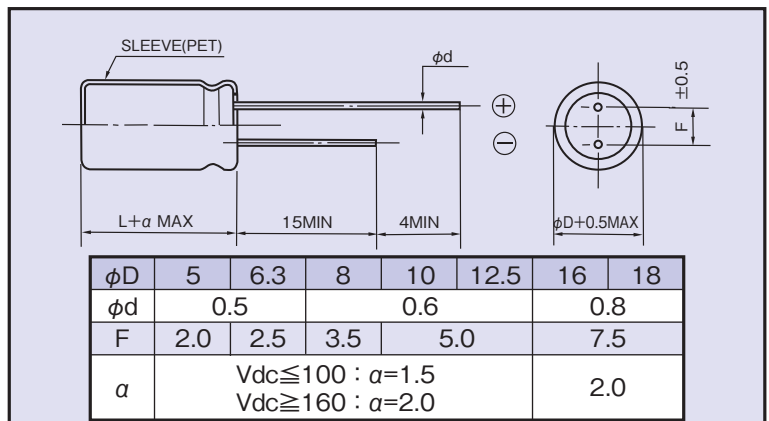

◆PART NUMBER

PX     M     D×L  
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆ **STANDARD SIZE**

Size  $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./105°C, 120Hz)[illegible][illegible]

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Aluminium Electrolytic Capacitors - Axial Leaded](#) *category:*

*Click to view products by* [Rubycon](#) *manufacturer:*

Other Similar products are found below :

[MAL203028109E3](#) [MAL203125221E3](#) [MAL204216159E3](#) [MAL211938479E3](#) [A141GH470Q025T](#) [NEH100M10BB](#) [NEH100M25CB](#)  
[NEH220M25CC](#) [NEH22M100CC](#) [NEH2.2M50AA](#) [NEH330M25DC-BULK](#) [NEH3.3M50AA](#) [NEH470M100FE](#) [NEH470M63FE](#)  
[NEH4.7M50AA](#) [NEHH100M450JB](#) [NEHH3.3M160BA](#) [NEHH4.7M160BB](#) [A141JP221Q040A](#) [A142GL470Q063A](#) [A142ML471Q063A](#)  
[A142MS471Q100A](#) [337RMR050M](#) [MAL211929479E3](#) [TE1202E](#) [516D477M025NR6A](#) [UVX1C222M](#) [39D117F350JP4](#)  
[511D337M035CG4D](#) [515D477M035CG8PE3](#) [516D476M035LM6A](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEH1000M35FE-BULK](#)  
[NEH1.0M100AA](#) [NEH.10M50AA](#) [NEH330M35DD](#) [NEH470M25DD](#) [NEH47M16BA](#) [NEHH100M250GF](#) [TPC1V102MCH](#)  
[NEH330M25DC](#) [NEH1000M50FF](#) [NEH470M35ED-BULK](#) [NEH47M50CB-BULK](#) [NEH4700M50JB-BULK](#) [A142GL3R3Q450A](#)  
[A142JP100Q400A](#) [227TTA300A](#) [TVA1413-E3](#)