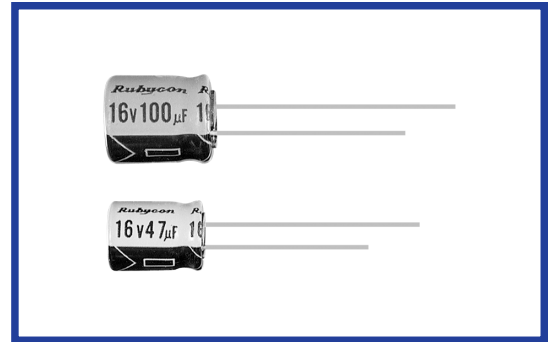


TWL SERIES
Low Leakage Current

 RoHS
compliance

◆ SPECIFICATIONS

Items	Characteristics																																																						
Category Temperature Range	-40~+85°C																																																						
Rated Voltage Range	6.3~50Vdc																																																						
Capacitance Tolerance	±20% (20°C, 120Hz)																																																						
Leakage Current(MAX)	I=0.002CV or 0.4µA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(µA) C=Capacitance(µF) V=Rated Voltage(Vdc)																																																						
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td colspan="2">〈L=7〉</td> <td colspan="6"></td> <td>(20°C, 120Hz)</td> </tr> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td colspan="2"></td> </tr> <tr> <td>tanδ</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">〈L≥11〉</td> <td colspan="6"></td> <td>(20°C, 120Hz)</td> </tr> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td colspan="2"></td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td colspan="2"></td> </tr> </table> <p>When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.</p>	〈L=7〉								(20°C, 120Hz)	Rated Voltage (Vdc)	6.3	10	16	25	35	50			tanδ	0.24	0.20	0.16	0.14	0.12	0.10			〈L≥11〉								(20°C, 120Hz)	Rated Voltage (Vdc)	6.3	10	16	25	35	50			tanδ	0.22	0.19	0.16	0.14	0.12	0.10		
〈L=7〉								(20°C, 120Hz)																																															
Rated Voltage (Vdc)	6.3	10	16	25	35	50																																																	
tanδ	0.24	0.20	0.16	0.14	0.12	0.10																																																	
〈L≥11〉								(20°C, 120Hz)																																															
Rated Voltage (Vdc)	6.3	10	16	25	35	50																																																	
tanδ	0.22	0.19	0.16	0.14	0.12	0.10																																																	
Endurance	<p>After applying rated voltage with rated ripple current for specified time at 85°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±25% of the initial value.</td> <td>Case Size</td> <td>Life Time (hrs)</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> <td>L=7</td> <td>1000</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> <td>L≥11</td> <td>2000</td> </tr> </table>	Capacitance Change	Within ±25% of the initial value.	Case Size	Life Time (hrs)	Dissipation Factor	Not more than 200% of the specified value.	L=7	1000	Leakage Current	Not more than the specified value.	L≥11	2000																																										
Capacitance Change	Within ±25% of the initial value.	Case Size	Life Time (hrs)																																																				
Dissipation Factor	Not more than 200% of the specified value.	L=7	1000																																																				
Leakage Current	Not more than the specified value.	L≥11	2000																																																				
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td></td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	6.3	10	16	25	35	50	(120Hz)	Z(-25°C)/Z(20°C)	4	3	2	2	2	2		Z(-40°C)/Z(20°C)	8	6	6	4	4	3																															
Rated Voltage (Vdc)	6.3	10	16	25	35	50	(120Hz)																																																
Z(-25°C)/Z(20°C)	4	3	2	2	2	2																																																	
Z(-40°C)/Z(20°C)	8	6	6	4	4	3																																																	

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)	60(50)	120	500	1k	10k≤	
Coefficient	0.47~1µF	0.50	1.00	1.20	1.30	1.50
	2.2~4.7µF	0.65	1.00	1.20	1.30	1.50
	10~47µF	0.80	1.00	1.20	1.30	1.50
	100~1000µF	0.80	1.00	1.10	1.15	1.20
	2200µF	0.80	1.00	1.05	1.10	1.15

◆ OPTION

	Code
PET Sleeve	EFC

◆ PART NUMBER

□□□	TWL	□□□□□	M	□□□	□□	DXL
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)