

ZLG SERIES

105°C Ultra Low Impedance

• Load Life : 105°C 1000~5000 hours.

RoHS
compliance


◆SPECIFICATIONS

Items	Characteristics																									
Category Temperature Range	−40~+105°C																									
Rated Voltage Range	6.3~35Vdc																									
Capacitance Tolerance	±20%(20°C,120Hz)																									
Leakage Current(MAX)	I=0.03CV or 3μA whichever is greater. (After 2 minutes) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																									
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </table> (20°C,120Hz) When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.						Rated Voltage (Vdc)	6.3	10	16	25	35	tanδ	0.22	0.19	0.16	0.14	0.12								
Rated Voltage (Vdc)	6.3	10	16	25	35																					
tanδ	0.22	0.19	0.16	0.14	0.12																					
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table> <table border="1"> <tr> <td>Case Size</td> <td>Life Time (hrs)</td> </tr> <tr> <td>L=7</td> <td>1000</td> </tr> <tr> <td>φD≤6.3</td> <td>2000</td> </tr> <tr> <td>L≥11</td> <td>3000</td> </tr> <tr> <td>φD= 8</td> <td>4000</td> </tr> <tr> <td>φD= 10</td> <td>5000</td> </tr> <tr> <td>φD≥12.5</td> <td></td> </tr> </table>						Capacitance Change	Within ±25% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	Case Size	Life Time (hrs)	L=7	1000	φD≤6.3	2000	L≥11	3000	φD= 8	4000	φD= 10	5000	φD≥12.5	
Capacitance Change	Within ±25% of the initial value.																									
Dissipation Factor	Not more than 200% of the specified value.																									
Leakage Current	Not more than the specified value.																									
Case Size	Life Time (hrs)																									
L=7	1000																									
φD≤6.3	2000																									
L≥11	3000																									
φD= 8	4000																									
φD= 10	5000																									
φD≥12.5																										
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>12</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> </tr> </table> (120Hz)						Rated Voltage (Vdc)	6.3	10	16	25	35	Z(-25°C)/Z(20°C)	2	2	2	2	2	Z(-40°C)/Z(20°C)	12	12	10	8	6		
Rated Voltage (Vdc)	6.3	10	16	25	35																					
Z(-25°C)/Z(20°C)	2	2	2	2	2																					
Z(-40°C)/Z(20°C)	12	12	10	8	6																					

◆MULTIPLIER FOR RIPPLE CURRENT

	Frequency(Hz)	120	1k	10k	100k≤
Coefficient	4.7~10uF	0.15	0.53	0.80	1.00
	22~47uF	0.18	0.70	0.90	1.00
	56~100uF	0.27	0.73	0.92	1.00
	120~270uF	0.49	0.73	0.92	1.00
	330~680uF	0.55	0.77	0.94	1.00
	820~1500uF	0.60	0.80	0.96	1.00
	2200~3900uF	0.70	0.85	0.98	1.00

◆DIMENSIONS (mm)

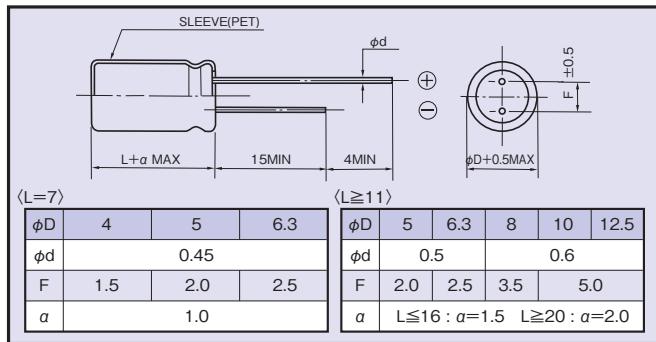

◆PART NUMBER

□□□ ZLG □□□□□ M □□□ Lead Forming DXL Case Size

◆OPTION

PET Sleeve	Code
	EFC



RADIAL LEAD ALUMINUM ELECTROLYTIC CAPACITORS

ZLG

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)		Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)						
				20°C, 100kHz	-10°C, 100kHz					20°C, 100kHz	-10°C, 100kHz					
6.3	33	4×7	230	0.48	1.6	25	10	4×7	230	0.52	1.7					
	47	5×7	350	0.26	0.86		22	5×7	350	0.27	0.89					
	100	6.3×7	480	0.15	0.50		33	6.3×7	480	0.16	0.53					
	150	5×11	405	0.15	0.50		47	6.3×7	480	0.15	0.50					
	330	6.3×11	760	0.065	0.19		47	5×11	405	0.15	0.50					
	560	8×11.5	1000	0.036	0.11		100	6.3×11	760	0.065	0.19					
	820	8×16	1250	0.028	0.083		220	8×11.5	1000	0.036	0.11					
	1000	10×12.5	1430	0.027	0.070		330	8×16	1250	0.028	0.083					
	1200	8×20	1600	0.020	0.056		330	10×12.5	1430	0.027	0.070					
	1200	10×16	1820	0.020	0.056		470	8×20	1600	0.020	0.056					
	1500	10×20	2180	0.014	0.033		470	10×16	1820	0.020	0.056					
	1500	12.5×16	2200	0.018	0.033		680	10×20	2180	0.014	0.033					
	2200	10×23	2360	0.013	0.030		680	12.5×16	2200	0.018	0.033					
	3300	12.5×20	2480	0.013	0.030		820	10×23	2360	0.013	0.030					
	3900	12.5×25	2900	0.012	0.024		1000	12.5×20	2480	0.013	0.030					
	22	4×7	230	0.49	1.6		1500	12.5×25	2900	0.012	0.024					
10	33	5×7	350	0.26	0.86	35	4.7	4×7	230	0.64	2.1					
	47	5×7	350	0.26	0.86		10	5×7	350	0.33	1.1					
	100	6.3×7	480	0.15	0.50		22	6.3×7	480	0.17	0.56					
	100	5×11	405	0.15	0.50		33	6.3×7	480	0.16	0.53					
	220	6.3×11	760	0.065	0.19		33	5×11	405	0.15	0.50					
	470	8×11.5	1000	0.036	0.11		56	6.3×11	760	0.065	0.19					
	680	8×16	1250	0.028	0.083		150	8×11.5	1000	0.036	0.11					
	680	10×12.5	1430	0.027	0.070		220	8×16	1250	0.028	0.083					
	1000	8×20	1600	0.020	0.056		220	10×12.5	1430	0.027	0.070					
	1000	10×16	1820	0.020	0.056		270	8×20	1600	0.020	0.056					
	1200	10×20	2180	0.014	0.033		330	10×12.5	1330	0.039	0.14					
	1200	12.5×16	2200	0.018	0.033		330	10×16	1820	0.020	0.056					
	1500	10×23	2360	0.013	0.030		470	10×20	2180	0.014	0.033					
	2200	12.5×20	2480	0.013	0.030		470	12.5×16	2200	0.018	0.033					
	3300	12.5×25	2900	0.012	0.024		560	10×23	2360	0.013	0.030					
	22	5×7	350	0.27	0.89		680	12.5×20	2480	0.013	0.030					
	33	5×7	350	0.26	0.86		1000	12.5×25	2900	0.012	0.024					
16	47	6.3×7	480	0.15	0.50											
	56	5×11	405	0.15	0.50											
	120	6.3×11	760	0.065	0.19											
	330	8×11.5	1000	0.036	0.11											
	470	8×16	1250	0.028	0.083											
	470	10×12.5	1430	0.027	0.070											
	680	8×20	1600	0.020	0.056											
	680	10×16	1820	0.020	0.056											
	1000	10×20	2180	0.014	0.033											
	1000	12.5×16	2200	0.018	0.033											
	1200	10×23	2360	0.013	0.030											
	1500	12.5×20	2480	0.013	0.030											
	2200	12.5×25	2900	0.012	0.024											

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)
[6.3X11](#) [VTI100S10](#) [VTI470S10](#) [VTI470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV220M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)