

TXV series

125°C 1000~2000時間 低ESR品
Load Life : 125°C 1000~2000 hours Low ESR


AEC-Q200



◆規格表/SPECIFICATIONS


項目 Item	特性 Characteristics					
カテゴリ温度範囲 Category Temperature Range	-40~+125°C					
定格電圧範囲 Rated Voltage Range	10~35Vdc					
静電容量許容差 Capacitance Tolerance	±20% (20°C, 120Hz)					
漏れ電流 Leakage Current (MAX)	I=0.01CV 又は 3μA のいずれか大なる値以下 (定格電圧印加2分後) I=0.01CV or 3μA whichever is greater. (After 2 minutes) I=漏れ電流(μA) C=静電容量(μF) V=定格電圧(Vdc) Leakage Current Capacitance Rated Voltage					
損失角の正接 (tan δ) Dissipation Factor(MAX)	定格電圧 (Vdc) Rated Voltage	10	16	25	35	(20°C, 120Hz)
	tan δ	0.30	0.20	0.18	0.16	
耐久性 Endurance	125°C中で表の時間定格電圧(リップル重量)印加後、下記項目を満足すること。 After applying rated voltage with rated ripple current for specified time at 125°C, the capacitors shall meet the following requirements.					
	静電容量変化率 Capacitance Change	初期値の±30%以内 Within ±30% of the initial value.				
	損失角の正接 Dissipation Factor	規格値の300%以下 Not more than 300% of the specified value.				
	漏れ電流 Leakage Current	規格値以下 Not more than the specified value.				
	ケースサイズ Case Size	時間 (hrs) LifeTime				
	φD=6.3	1000				
	φD≥8	2000				
低温特性 Low Temperature Stability (インピーダンス比) Impedance Ratio (MAX)	定格電圧 (Vdc) Rated Voltage	10	16	25	35	(120Hz)
	Z(-40°C) / Z(20°C)	6	4	4	3	

◆寸法図/DIMENSIONS

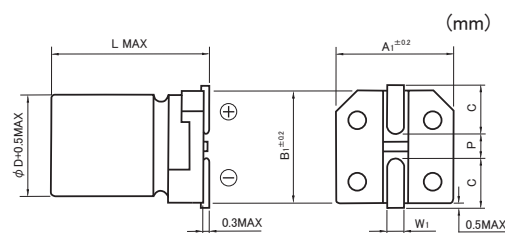

φD	L	A1	B1	C	W1	P
6.3	6.1	6.6	6.6	2.7	0.5~0.8	1.8
6.3	8	6.6	6.6	2.7	0.5~0.8	1.8
8	10.5	8.3	8.3	2.9	0.8~1.1	3.1
10	10.5	10.3	10.3	3.2	0.8~1.1	4.5


◆表示/MARKING

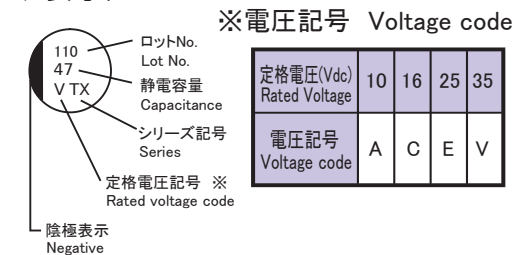

◆リップル電流補正係数/
MULTIPLIER FOR RIPPLE CURRENT

周波数 (Hz) Frequency	120	1k	10k	100k≤
22~33 μF	0.45	0.75	0.90	1.00
47~100 μF	0.50	0.80	0.95	1.00
220~470 μF	0.60	0.85	0.95	1.00

◆呼称方法/PART NUMBER



◆標準品一覧表/STANDARD SIZE

Size φD x L(mm), Rated Ripple Current (mA r.m.s./125°C, 100kHz), ESR(Ω MAX/100kHz)

Vdc	Cap (μF)	Size (φDXL)	Ripple	ESR	
				20°C	-40°C
10	100	6.3x8	140	0.3	5
	220	6.3x8	110	0.7	11
	470	10x10.5	300	0.2	3
16	47	6.3x6.1	70	1	15
		6.3x8	140	0.3	5

Vdc	Cap (μF)	Size (φDXL)	Ripple	ESR	
				20°C	-40°C
25	33	6.3x6.1	70	1	15
	47	6.3x8	140	0.3	5
	100	6.3x8	110	0.7	11
		8x10.5	300	0.16	2.5
	220	8x10.5	220	0.3	4.5
		10x10.5	420	0.1	1.5
330	10x10.5	300	0.2	3	

Vdc	Cap (μF)	Size (φDXL)	Ripple	ESR	
				20°C	-40°C
35	22	6.3x6.1	70	1	15
	33	6.3x8	140	0.3	5
	47	6.3x8	110	0.7	11
		8x10.5	300	0.16	2.5
	100	8x10.5	220	0.3	4.5
		10x10.5	420	0.1	1.5
220	10x10.5	300	0.2	3	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Rubycon manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099017E3](#) [MAL215099818E3](#) [AEH1010331M025R](#) [AEA1010102M016R](#) [AEH1012471M016R](#)
[MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT1000UF10V34RV0081](#) [XT100UF50V90RV0067](#)
[RVE100UF16V67RV0046](#) [XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#)
[RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#)
[FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#) [XT100UF16V90RV0061](#) [RT100UF35V90RV0102](#)
[XT100UF35V90RV0065](#) [FZ100UF35V90RV0064](#) [XT100UF25V90RV0062](#) [XT220UF10V90RV0073](#) [XT220UF35V90RV0076](#)
[XT470UF6.3V90RV0128](#) [LZ47UF35V90RV0123](#) [XT330UF25V90RV0127](#) [XT47UF35V90RV0081](#)