

**BXC SERIES**
**Load Life : 105°C 8000~12000 hours**

\*For LED Lighting.


**◆SPECIFICATIONS**

Items	Characteristics																	
Category Temperature Range	-25~+105°C																	
Rated Voltage Range	160~500Vdc																	
Capacitance Tolerance	±20% (20°C, 120Hz)																	
Leakage Current(MAX)	<table border="1"> <tr> <th>CV ≤ 1000</th> <th>CV &gt; 1000</th> </tr> <tr> <td>I = 0.1CV + 40µA (1minute)</td> <td>I = 0.04CV + 100µA (1minute)</td> </tr> <tr> <td>I = 0.03CV + 15µA (5minutes)</td> <td>I = 0.02CV + 25µA (5minutes)</td> </tr> </table>	CV ≤ 1000	CV > 1000	I = 0.1CV + 40µA (1minute)	I = 0.04CV + 100µA (1minute)	I = 0.03CV + 15µA (5minutes)	I = 0.02CV + 25µA (5minutes)	I = Leakage Current(µA) C = Capacitance(µF) V = Rated Voltage(Vdc)										
	CV ≤ 1000	CV > 1000																
I = 0.1CV + 40µA (1minute)	I = 0.04CV + 100µA (1minute)																	
I = 0.03CV + 15µA (5minutes)	I = 0.02CV + 25µA (5minutes)																	
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <th>Rated Voltage (Vdc)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> <tr> <td>tanδ</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> </tr> </table>	Rated Voltage (Vdc)	160	200	250	350	400	450	500	tanδ	0.15	0.15	0.15	0.20	0.20	0.20	0.24	(20°C, 120Hz)
Rated Voltage (Vdc)	160	200	250	350	400	450	500											
tanδ	0.15	0.15	0.15	0.20	0.20	0.20	0.24											
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements.																	
	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	<table border="1"> <tr> <th>Case Size</th> <th>Life Time (hrs)</th> </tr> <tr> <td>8×11.5, 10×12.5</td> <td>8000</td> </tr> <tr> <td>10×16, 10×20</td> <td>10000</td> </tr> <tr> <td>φD ≥ 12.5</td> <td>12000</td> </tr> </table>	Case Size	Life Time (hrs)	8×11.5, 10×12.5	8000	10×16, 10×20	10000	φD ≥ 12.5	12000		
	Capacitance Change	Within ±20% of the initial value.																
Dissipation Factor	Not more than 200% of the specified value.																	
Leakage Current	Not more than the specified value.																	
Case Size	Life Time (hrs)																	
8×11.5, 10×12.5	8000																	
10×16, 10×20	10000																	
φD ≥ 12.5	12000																	
		※500Vdc:10000hrs																
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <th>Rated Voltage (Vdc)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> <td>6</td> </tr> </table>	Rated Voltage (Vdc)	160	200	250	350	400	450	500	Z(-25°C)/Z(20°C)	3	3	3	6	6	6	6	(120Hz)
Rated Voltage (Vdc)	160	200	250	350	400	450	500											
Z(-25°C)/Z(20°C)	3	3	3	6	6	6	6											

**◆MULTIPLIER FOR RIPPLE CURRENT**

Frequency (Hz)		120	1k	10k	100k ≤
Coefficient	1~5.6µF	0.20	0.40	0.80	1.00
	6.8~18µF	0.30	0.60	0.90	1.00
	22~82µF	0.40	0.70	0.90	1.00
	100~220µF	0.45	0.75	0.90	1.00

**◆OPTION**

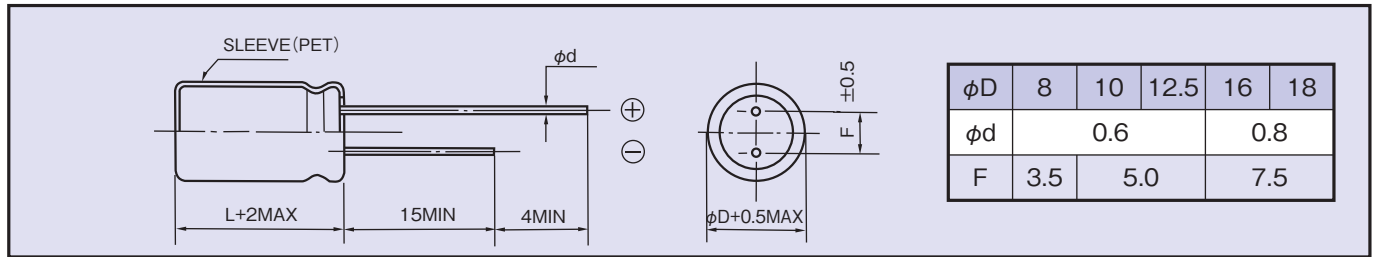
	Code
PET Sleeve	EFC

**◆PART NUMBER**

□□□	BXC	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

**◆ DIMENSIONS**

(mm)


**◆ STANDARD SIZE**

 Size  $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./105°C, 100kHz)

Cap( $\mu F$ )	Vdc	160		200		250		350	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7						8×11.5	160	10×12.5	150
5.6								10×12.5	180
6.8						10×12.5	250	10×16	280
10		10×16	320	10×16	320	10×16	320	10×20	350
18								10×20	350
22		10×20	500	10×20	500	10×16 10×20	470 500	12.5×20	650
33		10×20	650	10×20	650	12.5×16 12.5×20	760 800	16×20	900
47		10×20	750	12.5×20	980	12.5×20	980	16×20	1080
56						12.5×20 18×16	1080 960		
68		12.5×20	1180	12.5×25 16×20	1300	12.5×25 16×20	1300	18×25	1470
82				16×20	1380	12.5×30 16×20	1500 1440	18×25	1530
100		12.5×25 16×20	1420	16×20	1420	16×25 18×20	1530 1440		
120						18×20	1500		
150		16×25	1890	16×25	1890	18×25	1960		
220		18×25	2370	18×25	2370				

Cap( $\mu F$ )	Vdc	400		450		500	
		Size	Ripple	Size	Ripple	Size	Ripple
1		8×11.5 10×12.5	60 70				
1.5		8×11.5 10×12.5	90 100				
1.8		8×11.5 10×12.5	95 120				
2.2		8×11.5 10×12.5	95 140				
3.3		10×12.5 10×16	150 180				
4.7		10×16	220	10×16 10×20	180 220		
5.6		10×16	250	10×16 10×20	200 250		
6.8		10×16	280	10×16 10×20	230 280		
8.2				10×20	280		
10		10×20	350	10×20 12.5×16 12.5×20	330 360 450	12.5×20	320
15		12.5×20	550	12.5×20 12.5×25 16×16	450 600	12.5×25 16×20	440
22		12.5×25 16×20	760	12.5×25 16×20	600 730	12.5×35 16×25 18×20	560
33		16×20	900	16×20 16×25 18×20	730 980 780	16×31.5 18×25	700
47		16×25 18×20	1180	18×25	1200	18×31.5	880
68		18×25	1470				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [Rubycon](#) manufacturer:*

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)  
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)  
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)  
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)  
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)  
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)  
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKMG500ETD221MJC5S](#) [LKMK2502W101MF](#)  
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)  
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)