

HXG SERIES

105°C High Ripple Current, Miniaturized

*Load Life: 105°C 3000hours.

RoHS compliance



◆SPECIFICATIONS

Items	Characteristics						
Category Temperature Range	-25~+105°C						
Rated Voltage Range	400~450Vdc						
Capacitance Tolerance	±20%(20°C,120Hz)						
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)						
Dissipation Factor(MAX) (tanδ)	0.2 (20°C,120Hz)						
Endurance	After applying rated voltage with rated ripple current for 3000 hours at 105°C, the capacitors shall meet the following requirements. <table border="1" style="margin-left: 20px;"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.						
Dissipation Factor	Not more than 200% of the specified value.						
Leakage Current	Not more than the specified value.						
Low Temperature Stability Impedance Ratio(MAX)	<table border="1" style="margin-left: 20px;"> <tr> <td>Rated Voltage (Vdc)</td> <td>400~450</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>8</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	400~450	(120Hz)	Z(-25°C)/Z(20°C)	8	
Rated Voltage (Vdc)	400~450	(120Hz)					
Z(-25°C)/Z(20°C)	8						

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120(100)	300	500	1k	10k≤
Coefficient	0.80	1.00	1.15	1.20	1.25	1.40

◆OPTION


	Code
PET Sleeve without plate	EFC

◆PART NUMBER



◆DIMENSIONS

(mm)

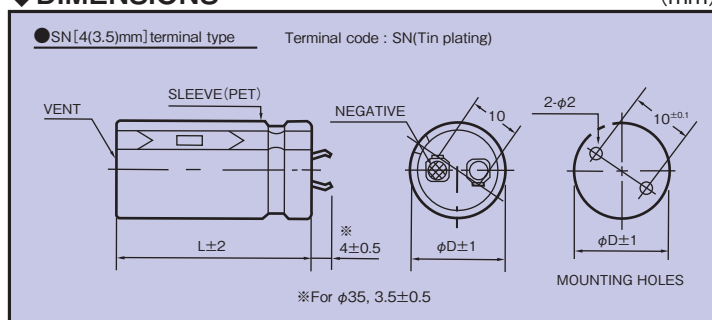

◆ STANDARD SIZE

Cap(μF)	Vdc		400									
	φD		φ20		φ22		φ25		φ30		φ35	
68			20×25	0.94								
82			20×25	1.01	22×25	1.07						
100			20×30	1.18	22×25	1.15						
120			20×35	1.35	22×30	1.34	25×25	1.31				
150			20×40	1.56	22×35	1.55	25×25	1.43				
180			20×45	1.76	22×40	1.76	25×30	1.65	30×25	1.68		
220					22×45	1.99	25×35	1.90	30×30	1.88		
270					22×50	2.24	25×40	2.16	30×30	2.01	35×25	2.12
330							25×50	2.55	30×35	2.31	35×30	2.33
390									30×40	2.59	35×35	2.52
470									30×50	3.04	35×40	2.85
560											35×45	3.18
680											35×50	3.47

Cap(μF)	Vdc		420									
	φD		φ20		φ22		φ25		φ30		φ35	
68			20×25	0.92								
82			20×30	1.07	22×25	1.05						
100			20×35	1.23	22×30	1.22	25×25	1.20				
120			20×40	1.40	22×30	1.31	25×25	1.29				
150			20×45	1.60	22×35	1.52	25×30	1.51	30×25	1.49		
180			20×50	1.79	22×40	1.72	25×35	1.73	30×25	1.59		
220					22×50	2.03	25×40	1.97	30×30	1.85	35×25	1.74
270							25×45	2.22	30×35	2.12	35×30	2.04
330									30×40	2.41	35×30	2.16
390									30×45	2.68	35×35	2.45
470									30×50	2.98	35×45	2.92
560											35×50	3.23

Cap(μF)	Vdc		450									
	φD		φ20		φ22		φ25		φ30		φ35	
56			20×25	0.85								
68			20×25	0.92	22×25	0.97						
82			20×30	1.07	22×25	1.05						
100			20×35	1.23	22×30	1.22	25×25	1.20				
120			20×40	1.40	22×35	1.39	25×25	1.29				
150			20×50	1.66	22×40	1.60	25×30	1.51	30×25	1.49		
180					22×45	1.80	25×35	1.73	30×30	1.72		
220							25×40	1.97	30×30	1.85	35×25	1.74
270							25×50	2.32	30×35	2.12	35×30	2.04
330									30×45	2.53	35×35	2.33
390									30×50	2.80	35×40	2.61
470											35×45	2.92
560											35×50	3.23

↑
Ripple Current (A r.m.s./120Hz, 105°C)

↑
Case Size φD×L(mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Snap In](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[227LBA250M2BD](#) [MAL215969181E3](#) [ALC40F1012DH](#) [ALC40E1004EL](#) [LGZ2W101MELB30](#) [LGZ2W121MELB35](#) [LGZ2W151MELB40](#)
[LGZ2W820MELB25](#) [LGZ2W221MELB50](#) [LGZ2W271MELC45](#) [LGZ2W221MELC40](#) [LGZ2W331MELC50](#) [LGZ2W151MELC30](#)
[LGZ2W181MELC35](#) [LGZ2W121MELC25](#) [HC1C339M30040HA](#) [HC1E109M25030HA](#) [HC1J109M30050HA](#) [HC1V229M35045HA](#)
[HC2G227M25040HA101](#) [HC2G337M30040HA](#) [HE1E229M30045HA](#) [HE1H109M35040HA](#) [HE1J478M25040HA](#) [HE1J688M35040HA](#)
[HE2A228M30040HA](#) [HE2E227M22030HA](#) [HE2E477M25040HA](#) [HE2E477M30030HA](#) [HE2G107M30025HA](#) [HE2G227M30045HA](#)
[380LX101M500H452](#) [382LX152M250A052](#) [382LX152M450B082VS](#) [382LX183M100B082VS](#) [382LX223M080B062VS](#)
[382LX223M100B092VS](#) [382LX333M080B092VS](#) [383LX223M080B092VS](#) [HP 1000U/63V](#) [HP 100U/450V](#) [382LX153M100B062VS](#)
[382LX222M400B092VS](#) [382LX223M063N082](#) [383LX153M063A062](#) [383LX153M080N082](#) [383LX333M050B052VS](#) [383LX471M450A052](#)
[400VXH150MEFCSN25X25](#) [LGX2H151MELA45](#)