

## CXW SERIES

105°C 5000 hours, Ultra Miniaturized

• Temperature Range : -40°C ~ +105°C

RoHS  
compliance

## ◆SPECIFICATIONS

Items	Characteristics									
Category Temperature Range	-40~+105°C									
Rated Voltage Range	400~500Vdc									
Capacitance Tolerance	±20% (20°C, 120Hz)									
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I = Leakage Current(μA)      C = Capacitance(μF)      V = Rated Voltage(Vdc)									
Dissipation Factor(MAX) (tanδ)	Rated Voltage (Vdc)	400~450	500	(20°C, 120Hz)						
	tanδ	0.20	0.25							
Endurance	After applying rated voltage with rated ripple current for 5000 hours at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>			Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	
Capacitance Change	Within ±20% of the initial value.									
Dissipation Factor	Not more than 200% of the specified value.									
Leakage Current	Not more than the specified value.									
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage (Vdc)	400	420~500	(120Hz)						
	Z(-25°C)/Z(20°C)	5	6							

## ◆MULTIPLIER FOR RIPPLE CURRENT


Frequency(Hz)	60(50)	120	500	1k	10k≤
Coefficient	0.80	1.00	1.25	1.40	1.50

## ◆OPTION

PET Sleeve (-40~+105°C)	Code
	EFR *

\* PET Sleeve -25~+105°C(EFC) is also available, please consult our sales offices.

## ◆DIMENSIONS (mm)

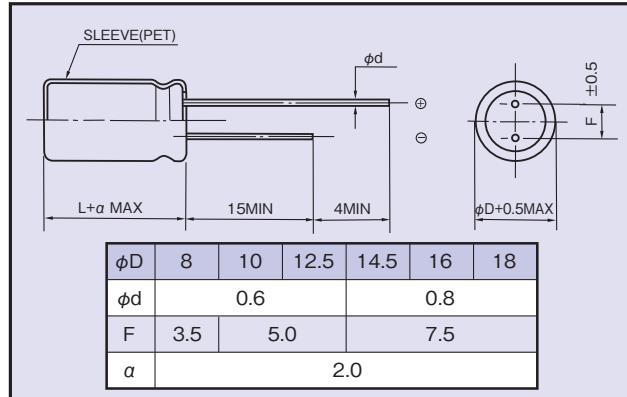

## ◆PART NUMBER

☐☐☐ Rating Voltage    CXW Series    ☐☐☐ Capacitance    M Capacitance Tolerance    ☐☐☐ Option    ☐☐ Lead Forming    DXL Case Size

## ◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance ( $\mu\text{F}$ )	Size $\phi\text{D} \times \text{L}$ (mm)	Rated Ripple Current (A r.m.s./105°C,120Hz)	Rated Voltage (Vdc)	Capacitance ( $\mu\text{F}$ )	Size $\phi\text{D} \times \text{L}$ (mm)	Rated Ripple Current (A r.m.s./105°C,120Hz)			
400	15	8×25	0.16	450	10	8×25	0.12			
	18	8×30	0.19		12	8×30	0.14			
	22	8×35	0.22		15	8×35	0.16			
	27	8×40	0.25		18	8×40	0.18			
	33	8×45	0.29		22	8×50	0.22			
	39	10×40	0.37		33	10×40	0.34			
	47	10×45	0.42		39	10×45	0.38			
	56	10×50	0.47		47	12.5×40	0.44			
	68	12.5×40	0.54		56	12.5×40	0.49			
	82	12.5×45	0.61		68	12.5×45	0.55			
	82	14.5×31.5	0.57		68	14.5×31.5	0.52			
	100	12.5×50	0.68		82	12.5×50	0.62			
	100	14.5×40	0.69		82	14.5×40	0.63			
	100	16×31.5	0.71		82	16×31.5	0.64			
	120	14.5×45	0.79		82	16×35	0.60			
	120	16×35	0.80		100	14.5×45	0.71			
	150	16×40	0.92		100	16×35	0.73			
	150	18×31.5	0.89		120	14.5×50	0.79			
	150	18×40	1.05		120	16×40	0.82			
	180	16×50	1.08		120	18×31.5	0.80			
	180	18×40	1.06		120	18×40	0.85			
	220	18×45	1.20		150	16×50	0.98			
420	12	8×25	0.10	500	150	18×40	0.97			
	15	8×30	0.12		180	18×45	1.09			
	18	8×35	0.16		220	18×50	1.22			
	22	8×40	0.19		500	82	16×45	0.61		
	39	10×40	0.36	※Additional multiplier for ripple current						
	47	10×50	0.43	<table border="1"> <tr> <td>Frequency (Hz)</td> <td>50k≤</td> </tr> <tr> <td>Coefficient</td> <td>2.00</td> </tr> </table>				Frequency (Hz)	50k≤	Coefficient
Frequency (Hz)	50k≤									
Coefficient	2.00									
56	12.5×40	0.48								
68	12.5×40	0.52								
68	14.5×31.5	0.52								
82	12.5×45	0.59								
82	14.5×35	0.59								
100	14.5×40	0.67								
100	16×31.5	0.69								
120	14.5×45	0.75								
120	16×35	0.78								
120	18×31.5	0.80								
150	16×45	0.94								
150	18×35	0.92								
180	16×50	1.05								
180	18×40	1.04								
220	18×50	1.22								

※  
※

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Rubycon manufacturer:***

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)  
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)  
[B41022A5686M6](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#)  
[EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#)  
[EGXF500ELL561ML15S](#) [EKG350ETD471MJ16S](#) [MEA562M2G--D130](#) [35YXA330MEFC10X12.5](#) [ELXZ630ELL221MJ25S](#)  
[ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#) [LKMD1401H221MF](#) [B41888G6108M000](#)  
[EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKG350ETD221MJC5S](#) [LKMK2502W101MF](#) [LKMD1401H181MF](#) [LKMI2502G820MF](#)  
[LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCN25X45](#) [450MXK330MA2RFC22X50](#)  
[63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#) [LKMI3152A681MF](#)